

Signal converters, trip amplifiers and process meters

Catalogue 2016/2017

Let's connect.

Analogue signal conditioning



Dear Customers,

The PDF versions of our catalogues offer practical additional functions, helping you to find your way around our product range and simplifying the ordering process.

In addition to the catalogue, the PDF also contains:

- Internal page links
- Links to the online catalogue

Try it out for yourself. Click the order number to obtain more detailed information and close-up images via your web browser. The links in the PDF file also enable you to go directly to the next desired catalogue page.

Further Weidmüller product catalogues can be accessed by clicking the following:



Signal converters, trip amplifiers and process meters

Catalogue 4.1

Signal converters, trip amplifiers and process meters

Product overview - Analogue Signal Conditioning

Intrinsically safe signal conditioners for hazardous area applications

Signal converters in 6 mm width

Signal converters

Trip amplifier for monitoring AC/DC circuits

Indicators and configurable displays

Accessories Analogue Signal Conditioning

Appendix

Technical appendix/Glossary

Index

Search according to type or order number

Signal converters, trip amplifiers and process meters

Intrinsically safe signal converters – ACT20X Page B.4



- Analogue and binary signal interfaces to Ex Zone 0 / Division 1
- FDT/DTM software configurable
- 2 channel modules in 22.5 mm housing

Signal converter, 6 mm – ACT20M Page C.4



- Isolating and converting of temperature signals and DC signals (3-way isolation, supply isolators and passive isolators)
- Up to 2 channels with a width of 6 mm
- Power supply via the CH20M DIN rail bus

Signal converter and monitoring components, 6 mm – MCZ Page C.30



- Signal converter in terminal format
- Passive isolator, temperature/frequency converter and threshold monitoring
- Simple wiring with pluggable cross-connection channels

Network-compatible signal converters ACT20C Page D.6



- Separation and conversion of current or voltage signals
- Limit value monitoring, diagnosis, monitoring via Ethernet networks
- PC configuration with FDT/DTM software

Signal converters and monitoring components – ACT20P Page D.8



- Separation and conversion of temperature and DC signals (3-way isolation, supply isolators and passive isolators)
- Strain gauge transmitter for reading from load cells
- High levels of galvanic isolation and accuracy

Signal converters – WAVE Page D.18



- Separation and conversion of temperature and DC signals (3-way isolation, supply isolators and passive isolators)
- A large selection of standard signal- and measurement isolating transformers
- High level of galvanic isolation

Interface converters Page D.74



- RS232/ RS485/ TTY interface converter in WAVE housing
- RS232 connection with SUB-D connector
- Bi-direction communication enabled

Trip amplifiers for monitoring – WAVE Page E.2



- Monitoring DC and AC currents and voltages
- Current/voltage ranges and switching points can be set manually.
- Pluggable units for monitoring current – on DIN rail base

Displays Page F.2



- Large four-character LED display
- 1/8"-DIN-standard front-panel with IP 65 protection
- Integrated signal converter and trip amplifier

Configuration adapter

Page G.4



- USB interface adapter for configuring signal converters
- Compatible with ACT20X, WAVE TTA and ITX+ modules
- Simple installation with plug-in connector

Markers and cross-connectors

Page G.12



- Suitable MultiCard markers for all modules
- Pluggable cross-connectors for WAVE, MCZ and MICROSERIES

Calibration device

Page G.14



- Measures and simulates voltage and current signals
- Adjustable continuous level and ramping functions
- Easy to adjust with buttons on front

Product overview – Analogue Signal Conditioning

| | | |
|--|---|-----|
| Product overview – Analogue Signal Conditioning | Introduction | A.2 |
| | Quick select – Analogue Signal Conditioning | A.4 |

Analogue Signal Conditioning Qs and As


Where are analogue conditioners used?

In all types of electronic industrial and marine measurement and control systems – for example in processes such as power plants, steelworks, water and waste plants, oil and gas production and chemical processing. In fact, wherever temperature, pressure, level, flow, weight, speed, etc., is measured and controlled as part of a continuous or batch production process. Such measurement parameters – after being accurately produced – must not be degraded on their way from the field to the control room, despite external influences from the atmosphere and installation. Conversion or changes to these signals requires electronics of the highest quality, which can also withstand wide ambient temperature changes, electro-magnetic interference, vibration, corrosive or hazardous conditions.

What functions do analogue conditioners provide?

One or more of the following:

- 1) Isolation of high level DC measurement and control signals. (Why do we need isolation? – see the notes that follow later in this catalogue.)
- 2) Conversion of high level signals, such as 0...5 V input to 4...20 mA output
- 3) Amplification, linearisation and transmission of low-level sensor inputs, such as millivolts from thermocouples, into high level DC outputs to enable transmission over distances 100 m or more.
- 4) Initiation of status indications and alarms by creating relay contact closure outputs from analogue inputs.

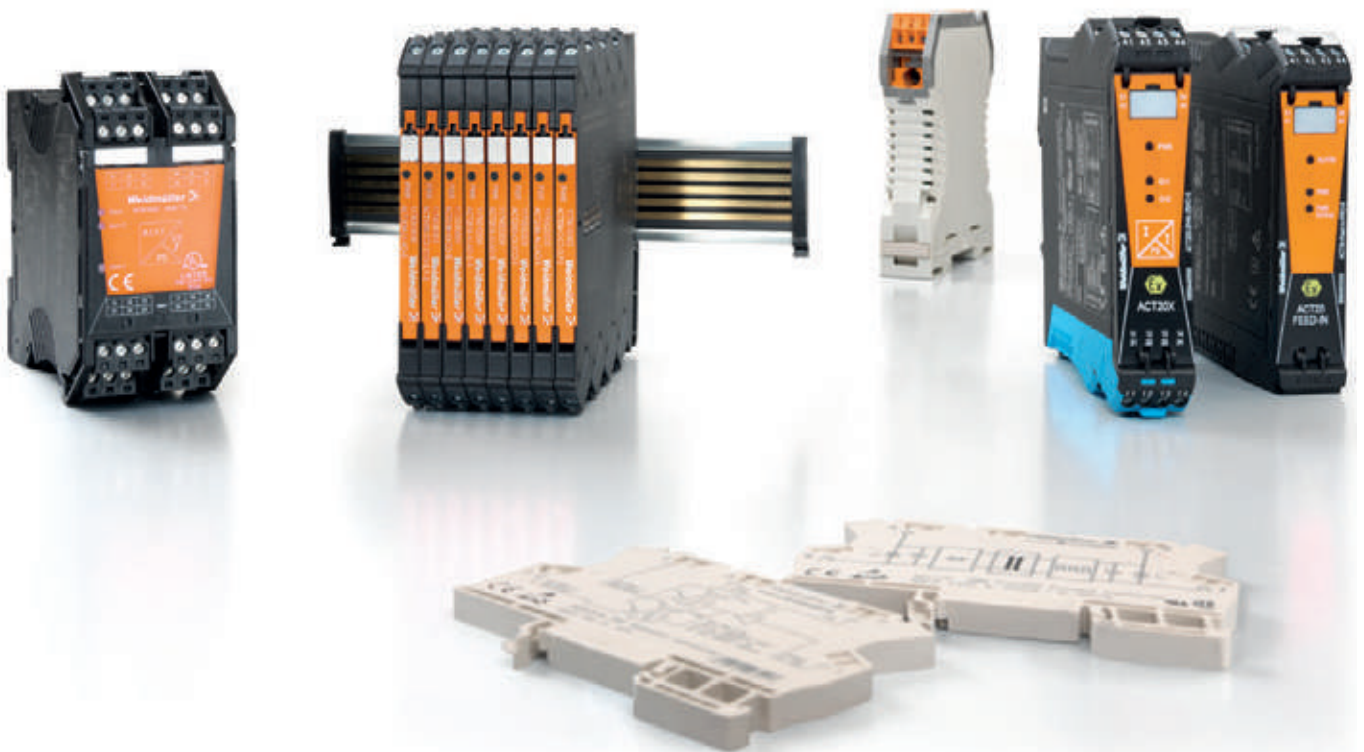

Why do we need separate analogue modules nowadays? Surely the control system (PLC or DCS) can perform the same functions?

- 1) Sometimes this is true, but look at where the cabling from the field devices (transmitters, sensors, valves and actuators) needs to go. It will usually go not just straight to the control system. Many signals are also passed to local indicators and alarms, and each will need isolating from the others.
- 2) Often sensors - like thermocouples for temperature – need isolating, converting and linearising locally to a standardised high level signal (e.g. 4...20 mA) for long distance transmission – instead of running expensive compensation cable to the control system.
- 3) Where the control system has no isolated analogue inputs, a separate isolator will often be needed.
- 4) Where the control system cannot provide power for the sensor / transmitter and it is convenient to do this from an isolating module.
- 5) Where a high integrity, dedicated display is required, separate from the control system display, and the input needs splitting.
- 6) Where local linearisation is needed for a plant operator – for example where a liquid volume indicator is needed for filling a bulk storage tank, but the measurement is level (level to volume conversion depends on the shape of the tank).
- 7) Where the control system only takes 4...20 mA analogue inputs and the sensors provide other less common ranges, such as 0...20 mV, 2...10 V, 0...10 kΩ, 0...1 mA, 4...12 kHz, 0...5 A AC etc
- 8) Where the control system needs to be protected from electrical noise pulses on it's analogue inputs
- 9) Where expansion of the analogue inputs would mean an expensive new I/O board for the control system

How can I select the right product for my application?

- 1) Weidmüller has a formidable range of analogue conditioners, covering most application requirements, and our range is expanding. We also have some useful tools for selection and configuration.
- 2) If you cannot find a suitable product for your application, it doesn't mean we don't have one! Tell us your requirement, and if we can't provide a solution from our current range of products, there may be a customised version that we could create for you.



Quick select – Analogue Signal Conditioning

Selection table

| Order No. | Product | Input | | | | | | | | | | Width | |
|--|------------------------------|--------|-----------|-----------|----------|---------|----|-----|-----------|---------------|-------------|---|-----------|
| | | Amount | 0...20 mA | 4...20 mA | 0...10 V | 0...5 V | TC | RTD | Frequency | Miscellaneous | Sensor feed | | |
| Intrinsically safe signal converter for the Ex zone | | | | | | | | | | | | | |
| 8965340000 | ACT20X-HDI-SD0-RN0-S | 1 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965350000 | ACT20X-HDI-SD0-RNC-S | 1 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965370000 | ACT20X-2HDI-2SD0-RN0-S | 2 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965380000 | ACT20X-2HDI-2SD0-RNC-S | 2 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965360000 | ACT20X-HDI-SD0-S | 1 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965390000 | ACT20X-2HDI-2SD0-S | 2 | | | | | | | | | | Namur Initiator | 22.5 mm |
| 8965400000 | ACT20X-SDI-HD0-L-S | 1 | | | | | | | | | | NPN PNP switching signal | 22.5 mm |
| 8965420000 | ACT20X-2SDI-2HD0-S | 2 | | | | | | | | | | NPN PNP switching signal | 22.5 mm |
| 8965410000 | ACT20X-SDI-HD0-H-S | 1 | | | | | | | | | | NPN PNP switching signal | 22.5 mm |
| 8965470000 | ACT20X-HTI-SAO-S | 1 | X | | | | | X | X | | | | 22.5 mm |
| 8965480000 | ACT20X-2HTI-2SAO-S | 2 | X | | | | | X | X | | | | 22.5 mm |
| 8965490000 | ACT20X-HUI-SAO-S | 1 | X | X | X | X | X | X | X | | | X | 22.5 mm |
| 1318220000 | ACT20X-HUI-SAO-LP-S | 1 | X | X | X | X | X | X | X | | | | 12.5 mm |
| 8965430000 | ACT20X-HAI-SAO-S | 1 | | X | | | | | | | | HART®-transparent | X 22.5 mm |
| 8965440000 | ACT20X-2HAI-2SAO-S | 2 | | X | | | | | | | | HART®-transparent | X 22.5 mm |
| 8965450000 | ACT20X-SAI-HAO-S | 1 | | X | | | | | | | | HART®-transparent | 22.5 mm |
| 8965460000 | ACT20X-2SAI-2HAO-S | 2 | | X | | | | | | | | HART®-transparent | 22.5 mm |
| Signal converter in 6 mm width | | | | | | | | | | | | | |
| 1176020000 | ACT20M-AI-2SAO-S | 1 | X | X | X | X | | | | | | | X 6.1 mm |
| 1175990000 | ACT20M-CI-2CO-S | 1 | X | X | | | | | | | | | 6.1 mm |
| 1176000000 | ACT20M-AI-AO-S | 1 | X | X | X | X | | | | | | | X 6.1 mm |
| 1176010000 | ACT20M-AI-AO-E-S | 1 | X | X | X | X | | | | | | | 6.1 mm |
| 1175980000 | ACT20M-CI-CO-S | 1 | X | X | | | | | | | | | 6.1 mm |
| 1176030000 | ACT20M-UI-AO-S | 1 | X | X | X | X | X | X | | | | | X 6.1 mm |
| 1176070000 | ACT20M-CI-CO-ILP-S | 1 | X | X | | | | | | | | | 6.1 mm |
| 1176080000 | ACT20M-2CI-2CO-ILP-S | 2 | X | X | | | | | | | | | 6.1 mm |
| 1176040000 | ACT20M-CI-CO-OLP-S | 1 | X | X | | | | | | | | | X 6.1 mm |
| 1176050000 | ACT20M-2CI-2CO-OLP-S | 2 | X | X | | | | | | | | | X 6.1 mm |
| 1375450000 | ACT20M-BAI-AO-S | 1 | | | | | | | | | | -10(20)...+10(20) mA, -5(10)...+5(10) V | 6.1 mm |
| 1375470000 | ACT20M-BAI-2AO-S | 1 | | | | | | | | | | -10(20)...+10(20) mA, -5(10)...+5(10) V | 6.1 mm |
| 1375480000 | ACT20M-TCI-AO-S | 1 | | | | | | X | | | | | 6.1 mm |
| 1375500000 | ACT20M-TCI-AO-E-S | 1 | | | | | | X | | | | | 6.1 mm |
| 1375510000 | ACT20M-RTI-AO-S | 1 | | | | | | | X | | | | 6.1 mm |
| 1375520000 | ACT20M-RTI-AO-E-S | 1 | | | | | | | X | | | | 6.1 mm |
| 1435590000 | ACT20M-RTCI-CO-OLP-S | 1 | | | | | | X | X | | | | 6.1 mm |
| 1435610000 | ACT20M-RTI-CO-EOLP-S | 1 | | | | | | | X | | | | 6.1 mm |
| 8425720000 | MCZ PT100/3 CLP 0...100C | 1 | | | | | | | X | | | | 6.1 mm |
| 8483680000 | MCZ PT100/3 CLP 0...120C | 1 | | | | | | | X | | | | 6.1 mm |
| 8604420000 | MCZ PT100/3 CLP 0...150C | 1 | | | | | | | X | | | | 6.1 mm |
| 8473010000 | MCZ PT100/3 CLP 0...200C | 1 | | | | | | | X | | | | 6.1 mm |
| 8473020000 | MCZ PT100/3 CLP 0...300C | 1 | | | | | | | X | | | | 6.1 mm |
| 8473000000 | MCZ PT100/3 CLP -50C...+150C | 1 | | | | | | | X | | | | 6.1 mm |
| 8604430000 | MCZ PT100/3 CLP -40C...100C | 1 | | | | | | | X | | | | 6.1 mm |
| 8411190000 | MCZ CCC 0-20mA/0-20mA | 1 | X | | | | | | | | | | 6 mm |
| 8260280000 | MCZ SC 0-10V | 1 | | | X | | | | | | | | 6 mm |
| 8227350000 | MCZ SC 0-20MA | 1 | X | | | | | | | | | | 6 mm |
| 8461480000 | MCZ CFC 0-20MA | 1 | X | | | | | | | | | | 6 mm |
| 8461470000 | MCZ VFC 0-10V | 1 | | X | | | | | | | | | 6 mm |
| Network-compatible signal converters | | | | | | | | | | | | | |
| 1334490000 | ACT20C-AI-AO-MTCP-S | 1 | X | X | X | | | | | | | | X 22.5 mm |
| 1510370000 | ACT20C-GTW-100-MTCP-S | 1 | | | | | | | | | | RJ45, Modbus TCP | 22.5 mm |
| 1510240000 | ACT20C-CMT-10-AO-RC-S | 1 | | | | | | | | | | 0...10 A AC/DC | 22.5 mm |
| 1510420000 | ACT20C-CMT-60-AO-RC-S | 1 | | | | | | | | | | 0...60 A AC/DC | 22.5 mm |

| Output | | | | | Configuration | Auxiliary power | Rated voltage | Isolation | Connection system | Special characteristics | |
|--------|-----------|-----------|----------|---------------|--|-----------------|---------------|-----------|-------------------|-------------------------|--|
| Amount | 0...20 mA | 4...20 mA | 0...10 V | Miscellaneous | | | | | | | |
| | | | | X | Relay output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 1 | | | | X | Relay output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 2 | | | | X | Relay output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 2 | | | | X | Relay output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 1 | | | | | Transistor output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 2 | | | | | Transistor output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 1 | | | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 2 | | | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety ignition protection IIC |
| 1 | | | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety ignition protection IIB |
| 1 | X | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 2 | X | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 1 | X | | | X | Limit value relay output, Status relay | Software | 24 V DC | 300 V | 3-way | S | With ATEX approval, intrinsic safety |
| 1 | | X | | | output loop | Software | 24 V DC | 300 V | 2-way | S | With ATEX approval, intrinsic safety, Supply on output side |
| 1 | | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | ATEX approval, intrinsic safety, HART®- transparent |
| 2 | | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | ATEX approval, intrinsic safety, HART®- transparent |
| 1 | | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | ATEX approval, intrinsic safety, HART®- transparent |
| 2 | | X | | | Status relay | Software | 24 V DC | 300 V | 3-way | S | ATEX approval, intrinsic safety, HART®- transparent |
| 2 | X | X | X | | | DIP switch | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 2 | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 1 | X | X | X | | | DIP switch | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 1 | X | X | X | | | DIP switch | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 1 | X | X | | | | | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 1 | X | X | X | | | Software | 24 V DC | 300 V | 3-way | S | ATEX approval |
| 1 | X | X | | | | | input loop | 300 V | 2-way | S | ATEX approval, Passive converter |
| 2 | X | X | | | | | input loop | 300 V | 2-way | S | ATEX approval, Passive converter |
| 1 | X | X | | | | | output loop | 300 V | 2-way | S | ATEX approval, Passive converter |
| 2 | X | X | | | | | output loop | 300 V | 2-way | S | ATEX approval, Passive converter |
| 1 | X | X | X | | | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 2 | X | X | X | | 2 x -10(20)...+10(20) mA | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | X | | internal CJC, external CJC | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | X | | internal CJC, external CJC | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | X | | 0(1)...5 V | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | | | 0(1)...5 V | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | | X | | | 20...4 mA | DIP switch | output loop | 300 V | 2-way | S | Passive converter, ATEX approval |
| 1 | | X | | | 20...4 mA | DIP switch | output loop | 300 V | 2-way | S | Passive converter, ATEX approval |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | X | | | | | | input loop | 100 V | 2-way | Z | passive isolator ILP |
| 2 | | | | | Limit value transistor output | potentiometer | 24 V DC | | | Z | |
| 2 | | | | | Limit value transistor output | potentiometer | 24 V DC | | | Z | |
| 1 | | | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 V | 2-way | Z | Frequency output |
| 1 | | | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 V | 2-way | Z | Frequency output |
| 1 | X | X | X | | Software | Software | 24 V DC | 300 V | 4-way | S | Network-compatible, Ethernet |
| 0 | | | | | | Software | 24 V DC | 30 V | 3-way | S | Modbus TCP Gateway |
| 1 | X | X | X | X | ± 10 V, ± 20 mA, Limit value relays | Software | 24 V DC | 300 V | 3-way | S | Through hole current monitor |
| 1 | X | X | X | X | ± 10 V, ± 20 mA, Limit value relays | Software | 24 V DC | 300 V | 3-way | S | Through hole current monitor |

Connection system: S = screw / Z = tension clamp, ILP (Input Loop Powered) = Input Loop Powered, OLP (Output Loop Powered) = Output Loop Powered

Quick select – Analogue Signal Conditioning

Selection table

| Order No. | Product | Input | | | | | | | | | | Width | | |
|--|-------------------------|--------|-----------|-----------|----------|---------|----|-----|-----------|---------------|-------------|---|---|---------|
| | | Amount | 0...20 mA | 4...20 mA | 0...10 V | 0...5 V | TC | RTD | Frequency | Miscellaneous | Sensor feed | | | |
| Signal converters | | | | | | | | | | | | | | |
| 7760054114 | ACT20P-CI-CCO | 1 | X | X | | | | | | | | 2-/3-wire transmitter | X | 12.5 mm |
| 7760054115 | ACT20P-CI-2CCO | 1 | X | X | | | | | | | | 2-/3-wire transmitter | X | 12.5 mm |
| 7760054117 | ACT20P-2CI-2CCO-12 | 2 | X | | | | | | | | | | | 12.5 mm |
| 8411190000 | MCZ CCC 0-20mA/0-20mA | 1 | X | | | | | | | | | | | 6 mm |
| Strain gauge transmitter | | | | | | | | | | | | | | |
| 1067250000 | ACT20P-BRIDGE-S | 1 | | | | | | | | | | 4..6, wire strain gauges | X | 22.5 mm |
| Universal measuring transducer | | | | | | | | | | | | | | |
| 1481970000 | ACT20P-PRO DCDC II-S | 1 | X | X | X | X | | | | | | ± 100 mA, ± 300 V | X | 12.5 mm |
| 1453210000 | ACT20P-UI-AO-DO-LP-S | 1 | X | X | X | X | X | X | | | | ± 25 mA, ± 5 A DC, ± 28 V DC, ± 300 V DC, 300 V AC | X | 12.5 mm |
| 1477420000 | ACT20P-AI-AO-DC-S | 1 | X | X | X | X | | | | | | 0...11V, 0...22mA | X | 12.5 mm |
| 8939670000 | WAS6 TTA | 1 | X | X | X | X | X | X | X | | | Adjustable: -200...500 mV -20...50 V | X | 45 mm |
| 8939680000 | WAZ6 TTA | 1 | X | X | X | X | X | X | X | | | 2 Hz...100 kHz | X | 45 mm |
| 8964310000 | WAS6 TTA EX | 1 | X | X | X | X | X | X | X | | | RTD, TC, resistor, | X | 45 mm |
| 8964320000 | WAZ6 TTA EX | 1 | X | X | X | X | X | X | X | | | potentiometer | X | 45 mm |
| Measuring- and monitoring modules | | | | | | | | | | | | | | |
| 7940045760 | ACT20P-UI-2RCO-DC-S | 1 | X | X | X | X | X | X | | | | ± 25 mA, ± 5 A DC, ± 30 V DC, ± 300 V DC, potentiometer, Widerstand | X | 22.5 mm |
| 8260280000 | MCZ SC 0-10V | 1 | | | X | | | | | | | | | 6 mm |
| 8227350000 | MCZ SC 0-20MA | 1 | X | | | | | | | | | | | 6 mm |
| AC/DC measuring transducer | | | | | | | | | | | | | | |
| 1510470000 | ACT20P-CMT-10-AO-RC-S | 1 | | | | | | | | | | 0...10 A AC/DC | | 22.5 mm |
| 1510540000 | ACT20P-CMT-30-AO-RC-S | 1 | | | | | | | | | | 0... 30 A AC/DC | | 22.5 mm |
| 1510440000 | ACT20P-CMT-60-AO-RC-S | 1 | | | | | | | | | | 0... 60 A AC/DC | | 22.5 mm |
| 8523400000 | WAS1 CMA 1/5/10A ac | 1 | | | | | | | | | | Adjustable: 0...10 A AC | | 22.5 mm |
| 8523410000 | WAZ1 CMA 1/5/10A ac | 1 | | | | | | | | | | Adjustable: 0...10 A AC | | 22.5 mm |
| 8528650000 | WAS1 CMA LP 1/5/10A ac | 1 | | | | | | | | | | Adjustable: 0...10 A AC | | 22.5 mm |
| 8528660000 | WAZ1 CMA LP 1/5/10A ac | 1 | | | | | | | | | | Adjustable: 0...10 A AC | | 22.5 mm |
| 8975590000 | WAS1 CMA LP 1/5/10A EX | 1 | | | | | | | | | | Adjustable: 0...10 A AC | | 22.5 mm |
| DC/DC 3-way isolator | | | | | | | | | | | | | | |
| 8447160000 | WAS5 CCC HF 0-20/0-20MA | 1 | X | | | | | | | | | | | 17.5 mm |
| 8447170000 | WAZ5 CCC HF 0-20/0-20MA | 1 | X | | | | | | | | | | | 17.5 mm |
| 8447220000 | WAS5 CVC HF 0-20/0-10V | 1 | X | | | | | | | | | | | 17.5 mm |
| 8447250000 | WAS5 CCC HF 4-20/0-20MA | 1 | | X | | | | | | | | | | 17.5 mm |
| 8447280000 | WAS5 CVC HF 4-20/0-10V | 1 | | X | | | | | | | | | | 17.5 mm |
| 8447310000 | WAS5 VCC HF 0-10/0-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8447340000 | WAS5 VCC HF 0-10/4-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8447370000 | WAS5 VVC HF 0-10/0-10V | 1 | | | X | | | | | | | | | 17.5 mm |
| 8447380000 | WAZ5 VVC HF 0-10/0-10V | 1 | | | X | | | | | | | | | 17.5 mm |
| 8561610000 | WAS5 VVC HF +/-10V/+10V | 1 | | | | | | | | | | -10V ...+10V | | 17.5 mm |
| 8540180000 | WAS5 CCC 0-20/0-20mA | 1 | X | | | | | | | | | | | 17.5 mm |
| 8540190000 | WAZ5 CCC 0-20/0-20mA | 1 | X | | | | | | | | | | | 17.5 mm |
| 8540250000 | WAS5 CCC 0-20/4-20mA | 1 | X | | | | | | | | | | | 17.5 mm |
| 8540270000 | WAS5 CVC 0-20mA/0-10V | 1 | X | | | | | | | | | | | 17.5 mm |
| 8540200000 | WAS5 CCC 4-20/0-20MA | 1 | | X | | | | | | | | | | 17.5 mm |
| 8540230000 | WAS5 CVC 4-20mA/0-10V | 1 | | X | | | | | | | | | | 17.5 mm |
| 8540310000 | WAS5 VCC 0-10V/0-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8540320000 | WAZ5 VCC 0-10V/0-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8540290000 | WAS5 VCC 0-10V/4-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8540300000 | WAZ5 VCC 0-10V/4-20MA | 1 | | | X | | | | | | | | | 17.5 mm |
| 8540330000 | WAS5 VVC 0-10V/0-10V | 1 | | | X | | | | | | | | | 17.5 mm |
| 8540340000 | WAZ5 VVC 0-10V/0-10V | 1 | | | X | | | | | | | | | 17.5 mm |

| Amount | Output | | | | Relay | Miscellaneous | Configuration | Auxiliary power | Rated voltage | Isolation | Connection system | Special characteristics |
|--------|-----------|-----------|----------|---|-------|--|---------------------------|--------------------|---------------|-----------|-------------------|--------------------------------|
| | 0...20 mA | 4...20 mA | 0...10 V | | | | | | | | | |
| 1 | X | X | | | | | | 24 V DC | 300 V | 3-way | S | HART®-transparent |
| 2 | X | X | | | | | | 24 V DC | 300 V | 3-way | S | HART®-transparent |
| 2 | X | X | | | | | | 24 V DC | 300 V | 3-way | S | HART®-transparent |
| 1 | X | | | | | | | input loop | 100 V | 2-way | Z | passive isolator ILP |
| 1 | X | X | X | | | Reset button (TARE) | | 10...60 V DC | 300 V | 3-way | S | |
| 1 | X | X | X | | | ± 10 V, ± 20 mA | Display, DIP switch | 24 V - 230 V AC/DC | 600 V | 3-way | S | aktiv or passiv output |
| 1 | | X | | | | Output Loop powered, NPN output, Limit value | Software | output loop | 300 V | 3-way | S | Output Loop powered |
| 1 | X | X | X | | | 0...11V, 0...22mA | DIP switch, Button, LED | 12...60 V DC | 300 V | 3-way | S | |
| 3 | X | X | X | X | | 1 analogue output | Software | 18 V - 230 V AC/DC | 300 V | 3-way | S | |
| 3 | X | X | X | X | | 2 relay outputs | Software | 18 V - 230 V AC/DC | 300 V | 3-way | Z | |
| 3 | X | X | X | X | | | Software | 18 V - 230 V AC/DC | 300 V | 3-way | S | ATEX approval |
| 3 | X | X | X | X | | | Software | 18 V - 230 V AC/DC | 300 V | 3-way | Z | ATEX approval |
| 1 | | | | X | | 2 x Limit value relay outputs | Software, Display | 9...60 V DC | 300 V | 3-way | S | |
| 2 | | | | | | Limit value transistor output | potentiometer | 24 V DC | | | Z | |
| 2 | | | | | | Limit value transistor output | potentiometer | 24 V DC | | | Z | |
| 1 | X | X | X | X | | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer | 24 V DC | 300 V | 3-way | S | Through hole current converter |
| 1 | X | X | X | X | | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer | 24 V DC | 300 V | 3-way | S | Through hole current converter |
| 1 | X | X | X | X | | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer | 24 V DC | 300 V | 3-way | S | Through hole current converter |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 2-way | S | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 2-way | Z | |
| 1 | X | X | X | | | | DIP switch | output loop | 300 V | 2-way | S | |
| 1 | X | X | X | | | | DIP switch | output loop | 300 V | 2-way | Z | |
| 1 | X | X | X | | | | DIP switch | output loop | 300 V | 2-way | S | ATEX approval |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | X | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | X | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | | | X | | | 24 V DC | 300 V | 3-way | S | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | X | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | X | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | X | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | X | | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | | X | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | | X | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | | | -10V ...+10V | | 24 V DC | 300 V | 3-way | Z | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | X | | | | | | | 24 V DC | 300 V | 3-way | Z | |
| 1 | | X | | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | X | | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | X | | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | | X | | | 24 V DC | 300 V | 3-way | S | |
| 1 | | | | | | | | 24 V DC | 300 V | 3-way | Z | |

Connection system: S = screw / Z = tension clamp, ILP (Input Loop Powered) = Input Loop Powered, OLP (Output Loop Powered) = Output Loop Powered

Quick select – Analogue Signal Conditioning

Selection table

| Order No. | Product | Input | | | | | | | | Miscellaneous | Sensor feed | Width |
|---|------------------------------|--------|-----------|-----------|----------|---------|----|-----|-----------|---------------|-------------|---------|
| | | Amount | 0...20 mA | 4...20 mA | 0...10 V | 0...5 V | TC | RTD | Frequency | | | |
| DC/DC 2-way isolator | | | | | | | | | | | | |
| 8444980000 | WAS4 CCC DC 4-20/4-20mA | 1 | | X | | | | | | | | 12.5 mm |
| 8444990000 | WAZ4 CCC DC 4-20/4-20mA | 1 | | X | | | | | | | | 12.5 mm |
| 8445010000 | WAS4 CCC DC 4-20/0-20mA | 1 | | X | | | | | | | | 12.5 mm |
| 8445040000 | WAS4 CVC DC 4-20/0-10V | 1 | | X | | | | | | | | 12.5 mm |
| 8445050000 | WAZ4 CVC DC 4-20/0-10V | 1 | | X | | | | | | | | 12.5 mm |
| DC/DC passive isolator | | | | | | | | | | | | |
| 8581160000 | WAS5 CCC 20LP | 1 | | | | | | | | | | 17.5 mm |
| 8581170000 | WAZ5 CCC 20LP | 1 | | | | | | | | | | 17.5 mm |
| 8975640000 | WAS5 CCC 20LP EX | 1 | | | | | | | | | | 17.5 mm |
| 8543720000 | WAS5 OLP | 1 | | | | | | | | | | 17.5 mm |
| 8543730000 | WAZ5 OLP | 1 | | | | | | | | | | 17.5 mm |
| 8444950000 | WAS5 CCC LP 0-20/0-20mA | 1 | X | | | | | | | | | 17.5 mm |
| 8444960000 | WAZ5 CCC LP 0-20/0-20mA | 1 | X | | | | | | | | | 17.5 mm |
| 8463580000 | WAS5 CCC LP 0-20/0-20mA | 1 | X | | | | | | | | | 17.5 mm |
| 8463590000 | WAZ5 CCC LP 0-20/0-20mA | 1 | X | | | | | | | | | 17.5 mm |
| Temperature measuring transducer | | | | | | | | | | | | |
| 8560700000 | WAS5 PRO RTD | | | | | | | X | | | | 12.5 mm |
| 8560710000 | WAZ5 PRO RTD | | | | | | | X | | | | 12.5 mm |
| 8679490000 | WAS5 PRO RTD 1000 | | | | | | | X | | | | 12.5 mm |
| 8638950000 | WAS5 PRO RTD Cu | | | | | | | X | | | | 12.5 mm |
| 8432280000 | WTZ4 PT100/4 C 0/4-20mA | | | | | | | X | | | | 12.5 mm |
| 8432250000 | WTZ4 PT100/4 V 0-10V | | | | | | | X | | | | 12.5 mm |
| 8432130000 | WTZ4 PT100/3 V 0-10V | | | | | | | X | | | | 12.5 mm |
| 8432160000 | WTZ4 PT100/3 C 0/4-20mA | | | | | | | X | | | | 12.5 mm |
| 8432190000 | WTZ4 PT100/2 V 0-10V | | | | | | | X | | | | 12.5 mm |
| 8432220000 | WTZ4 PT100/2 C 0/4-20mA | | | | | | | X | | | | 12.5 mm |
| 8560720000 | WAS5 PRO Thermo | | | | | | | X | | | | 12.5 mm |
| 8560730000 | WAZ5 PRO Thermo | | | | | | | X | | | | 12.5 mm |
| 8432300000 | WTS4 THERMO | | | | | | | X | | | | 12.5 mm |
| 8432310000 | WTZ4 THERMO | | | | | | | X | | | | 12.5 mm |
| 1375480000 | ACT20M-TCI-A0-S | 1 | | | | | | X | | | | 6.1 mm |
| 1375500000 | ACT20M-TCI-A0-E-S | 1 | | | | | | X | | | | 6.1 mm |
| 1375510000 | ACT20M-RTI-A0-S | 1 | | | | | | X | | | | 6.1 mm |
| 1375520000 | ACT20M-RTI-A0-E-S | 1 | | | | | | X | | | | 6.1 mm |
| 1435590000 | ACT20M-RTCI-C0-OLP-S | 1 | | | | | X | X | | | | 6.1 mm |
| 1435610000 | ACT20M-RTI-C0-EDLP-S | 1 | | | | | | X | | | | 6.1 mm |
| 8425720000 | MCZ PT100/3 CLP 0...100C | 1 | | | | | | X | | | | 6.1 mm |
| 8483680000 | MCZ PT100/3 CLP 0...120C | 1 | | | | | | X | | | | 6.1 mm |
| 8604420000 | MCZ PT100/3 CLP 0...150C | 1 | | | | | | X | | | | 6.1 mm |
| 8473010000 | MCZ PT100/3 CLP 0...200C | 1 | | | | | | X | | | | 6.1 mm |
| 8473020000 | MCZ PT100/3 CLP 0...300C | 1 | | | | | | X | | | | 6.1 mm |
| 8473000000 | MCZ PT100/3 CLP -50C...+150C | 1 | | | | | | X | | | | 6.1 mm |
| 8604430000 | MCZ PT100/3 CLP -40C...100C | 1 | | | | | | X | | | | 6.1 mm |

| Amount | Output | | | | Relay | Miscellaneous | Configuration | Auxiliary power | Rated voltage | Isolation | Connection system | Special characteristics |
|--------|-----------|-----------|----------|---|----------------------------|---------------|---------------------------|-----------------|---------------|-----------|-------------------|----------------------------------|
| | 0...20 mA | 4...20 mA | 0...10 V | | | | | | | | | |
| 1 | | X | | | | | 24 V DC | 300 V | 2-way | S | | |
| 1 | | X | | | | | 24 V DC | 300 V | 2-way | Z | | |
| 1 | X | | | | | | 24 V DC | 300 V | 2-way | S | | |
| 1 | | | X | | | | 24 V DC | 300 V | 2-way | S | | |
| 1 | | | | X | | | 24 V DC | 300 V | 2-way | Z | | |
| 2 | | X | | | | | output loop | 300 V | 2-way | S | | |
| 2 | | X | | | | | output loop | 300 V | 2-way | Z | | |
| 2 | | X | | | | | output loop | 300 V | 2-way | S | ATEX approval | |
| 1 | | X | | | | | output loop | 300 V | 2-way | S | | |
| 1 | | X | | | | | output loop | 300 V | 2-way | Z | | |
| 1 | X | | | | | | input loop | 300 V | 2-way | S | | |
| 1 | X | | | | | | input loop | 300 V | 2-way | Z | | |
| 2 | X | | | | | | input loop | 300 V | 2-way | S | | |
| 2 | X | | | | | | input loop | 300 V | 2-way | Z | | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | S | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | Z | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | S | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | S | |
| 1 | X | X | | | | | DIP switch, potentiometer | 24 V DC | | 3-way | Z | |
| 1 | X | X | | | | | DIP switch, potentiometer | 24 V DC | | 3-way | Z | |
| 1 | X | X | | | | | DIP switch, potentiometer | 24 V DC | | 3-way | Z | |
| 1 | X | X | | | | | DIP switch, potentiometer | 24 V DC | | 3-way | Z | |
| 1 | X | X | | | | | DIP switch, potentiometer | 24 V DC | | 3-way | Z | |
| 1 | | X | | | | | DIP switch | 24 V DC | | 3-way | S | |
| 1 | | X | | | | | DIP switch | 24 V DC | | 3-way | Z | |
| 1 | X | X | X | | | | DIP switch | 24 V DC | | 3-way | S | |
| 1 | X | X | X | | internal CJC, external CJC | | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | X | | internal CJC, external CJC | | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | X | | 0(1)...5 V | | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | X | X | | | 0(1)...5 V | | DIP switch | 24 V DC | 300 V | 2-way | S | ATEX approval |
| 1 | | X | | | 20...4 mA | | DIP switch | output loop | 300 V | 2-way | S | Passive converter, ATEX approval |
| 1 | | X | | | 20...4 mA | | DIP switch | output loop | 300 V | 2-way | S | Passive converter, ATEX approval |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |
| 1 | | X | | | | | | output loop | | 2-way | Z | Passive converter OLP |

Connection system: S = screw / Z = tension clamp, ILP (Input Loop Powered) = Input Loop Powered, OLP (Output Loop Powered) = Output Loop Powered

Quick select – Analogue Signal Conditioning

Selection table

| Order No. | Product | | | | | | | | | Input | | Width |
|---------------------------------------|------------------------|--------|-----------|-----------|----------|---------|----|-----|-----------|---|-------------|---------|
| | | Amount | 0...20 mA | 4...20 mA | 0...10 V | 0...5 V | TC | RTD | Frequency | Miscellaneous | Sensor feed | |
| Frequency measuring transducer | | | | | | | | | | | | |
| 8581180000 | WAS4 PRO Freq | | | | | | | | X | 2, 3-Draht PNP/NPN; Namur Initiator, Gegendaktstufe | | 12.5 mm |
| 8581190000 | WAZ4 PRO Freq | | | | | | | | X | Namur Initiator, push-pull step | | 12.5 mm |
| 8461480000 | MCZ CFC 0-20MA | 1 | X | | | | | | | | | 6 mm |
| 8461470000 | MCZ VFC 0-10V | 1 | | X | | | | | | | | 6 mm |
| Voltage measuring transducer | | | | | | | | | | | | |
| 8581220000 | WAS2 VMA V ac | | | | | | | | | Adjustable: 0...450 V AC | | 22.5 mm |
| 8581230000 | WAZ2 VMA V ac | | | | | | | | | Adjustable: 0...450 V AC | | 22.5 mm |
| Interface converters | | | | | | | | | | | | |
| 8615700000 | WDS2 RS232/RS485/422 | 1 | | | | | | | | RS232/RS485/422 | | |
| 8615690000 | WDS2 RS232/TTY | 1 | | | | | | | | RS232/TTY | | |
| Limit monitoring | | | | | | | | | | | | |
| 8543820000 | WAS5 DC/Alarm | 1 | X | X | X | | | | | | | 17.5 mm |
| 8543880000 | WAZ5 DC/Alarm | 1 | X | X | X | | | | | | | 17.5 mm |
| Current monitoring | | | | | | | | | | | | |
| 8742610000 | PAS CMR 0,5...2,5 A DC | | | | | | | | | 0,5...2,5 A DC | | 15.3 mm |
| 8742620000 | PAS CMR 2,0...5,0 A DC | | | | | | | | | 2,0...5,0 A DC | | 15.3 mm |
| 8742630000 | PAS CMR 4,5...10 A DC | | | | | | | | | 4,5...10 A DC | | 15.3 mm |
| Voltage monitoring | | | | | | | | | | | | |
| 8705640000 | WAS5 VMR 1ph | | | | | | | | | 24...260 V AC/DC 1-phase | | 17.5 mm |
| 8705630000 | WAS2 VMR 3ph | | | | | | | | | 80...250 V AC/DC 3-phase | | 22.5 mm |
| 8978580000 | CBX200 | 1 | | | | | | | | ACT20X | | |

| Amount | 0...20 mA | 4...20 mA | 0...10 V | Relay | Output | Configuration | Auxiliary power | Rated voltage | Isolation | Connection system | Special characteristics |
|--------|-----------|-----------|----------|-------|--------------------------------------|---------------------------|-----------------|---------------|-----------|-------------------|---------------------------------|
| | | | | | Miscellaneous | | | | | | |
| 1 | X | X | X | | | DIP switch | 24 V DC | 300 V | 3-way | S | |
| 1 | X | X | X | | | DIP switch | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 V | 2-way | Z | Frequency output |
| 1 | | | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 V | 2-way | Z | Frequency output |
| 1 | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | S | |
| 1 | X | X | | | | DIP switch | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | | | RS232/RS485/422 | DIP switch | 24 V DC | | 3-way | S | |
| 1 | | | | | RS232/TTY | DIP switch | 24 V DC | | 3-way | S | |
| 2 | | | | X | | DIP switch, potentiometer | 24 V DC | 300 V | 3-way | S | |
| 2 | | | | X | | DIP switch, potentiometer | 24 V DC | 300 V | 3-way | Z | |
| 1 | | | | X | | | | | 2-way | S | |
| 1 | | | | X | | | | | 2-way | S | |
| 1 | | | | X | | | | | 2-way | S | |
| 1 | | | | X | Monitoring of low and surge voltages | DIP switch, potentiometer | input loop | 300 V | 3-way | S | Adjustable switching thresholds |
| 1 | | | | X | Monitoring of low and surge voltages | DIP switch, potentiometer | input loop | 600 V | 2-way | S | Adjustable switching thresholds |
| 1 | | | | | | Software | USB | | | | Programming accessories |

Connection system: S = screw / Z = tension clamp, ILP (Input Loop Powered) = Input Loop Powered, OLP (Output Loop Powered) = Output Loop Powered

Intrinsically safe signal conditioners for hazardous area applications

Intrinsically safe signal conditioners for hazardous area applications

| | |
|---|------|
| Intrinsically safe signal conditioners for hazardous area applications - Overview | B.2 |
| ACT20X - Overview | B.4 |
| Current supply isolator | B.6 |
| Current output isolator | B.8 |
| Temperature transducer | B.10 |
| Universal measurement and signal isolator-converter | B.12 |
| NAMUR isolating switching amplifier | B.16 |
| Valve control module | B.20 |

Intrinsically safe signal conditioners for hazardous area applications

ACT20X signal converters

The ACT20X is a completely new line of signal converter products for the Ex zone. These compact modules require only 11 mm per channel and take up very little space in the electrical cabinet. Weidmüller has specifically designed the ACT20X line for process automation applications in Ex and non-Ex zones. The 17 different variants can process all standard input signals (such as 2-wire, HART®, NAMUR, RTD, thermocouple or DC signals) from Ex zone 0. They can also handle digital or analogue signals from Ex-zone field devices to the controller. The integrated relay output issues an alert in the event of a malfunction; this makes troubleshooting easier and reduces facility down times. The WI-Manager configuration software is based on FDT (Field Device Tool) technology. The software allows you to configure all ACT20X products with your PC so that they can be custom-fit to a wide variety of process applications. Weidmüller provides a device type manager (DTM) for the ACT20X modules that can be used in any FDT-based frame. The DTMs allow you to configure different devices quickly and accurately. They also enable you to analyse measurements and diagnostics data. The DTM can also be used to clearly identify the connected device. The FDT frame application “WI Manager” and the device-specific DTMs are available from Weidmüller free of charge. The ACT20X modules can be used in a temperature range from -20 °C to +60 °C without limitations. The modules can be installed in the safe zone or in the explosion risk area of Zone 2. The ACT20Xs always deliver a pure, interference-free signal

thanks to their accuracy, temperature stability and high insulation strength. They can easily be used around the globe since they already have all the necessary international approvals, including ATEX, ICEEX, GOST and FM.

The newest member of the ACT20X family is the ACT20X-HUI-SAO-LP. This offers an intrinsically safe input for 0/4 to 20 mA, 0 to 10 V, temperature and resistance signals, and separates the Ex zone from the safe zone. The narrow 12.5 mm module is supplied via the 4 to 20 mA output.

Features

- International approvals for Zone 0, 1 and 2 (IECEX, ATEX) and Class 1 Division 1 and 2 (FM)
- Analogue and binary signal interface to Zone 0/Div.1 for explosion-risk inputs and outputs
- All standard input signals (4 to 20 mA HART®, NAMUR-, RTD- or thermocouple signals) out of Ex zone 0, 1 or 2
- Two-channel type saves space in the electrical cabinet and reduces installation costs
- HART® transparent signal isolator
- Integrated alarm contact
- Configuration over FDT/DTM standard with the frame application “WI Manager”





ACT20X

ACT20X – intrinsic safety signal conditioners for hazardous areas

PC-configurable conditioners family for hazardous areas in the new Weidmüller electronics housing for installation in safe or hazardous areas.

ACT20X meets the arduous requirements of the process industry where potentially explosive fluids are controlled. The range connects to sensors and actuators in the hazardous area, isolates their signals and limits the energy passed to them. On the input side ACT20X models can process d.c.,

temperature, Namur and volt-free contact signals. On the output side field devices in the Ex area are controlled via the ACT20X with analogue or digital signals. All ACT20X products are characterised by insulation, accuracy and high temperature stability.


The digital 2-channel versions with width of 22.5 mm are available with either transistor or relay output. Due to this high component density, the space requirements and installation costs are reduced accordingly.





Configuration via FDT

All modules can be quickly and conveniently configured with manufacturer-independent FDT/DTM software.




Worldwide application

Fulfills the strict standards and requirements of the process industry. Can be used worldwide due to international and local approvals ATEX, IECEx, CULUS, FM, GOST and DNV.




Intelligent connection system

Pluggable, coded, with release lever. The release lever simplifies maintenance and allows disconnection without damaging the cables.



Alarm function

No laborious troubleshooting. Alarm function integrated for cable or sensor errors. In case of failures, a diagnostic signal is sent to the control system.



Robust

Wide ambient temperature range from - 20 °C ... + 60 °C.



SIL certification according 61508

Available for safety functions, e.g. switching aggregates on/off, monitoring actuators or temperature/pressure.

| | |
|--|--|
| | Current supply isolator, HART® Transparent |
| | Current output isolator, HART® Transparent |
| | Temperature transducer |
| | Universal measurement and signal isolator/converter |
| | NAMUR disconnect-switch amplifier |
| | Valve control component |

ACT20X

Current supply isolator, HART® Transparent

The ACT20X-HAI-SAO current supply isolator is a HART®-protocol transparent signal isolator for analogue input signals from Ex zone 0. It provides an analogue signal for the safe zone on the output side. It is available in a single-channel or double-channel version.

EX area Zone 0, 1, 2, 20, 21, 22



Safe area Zone 2 / FM Class 1, Division 2

Input Signals



Output Signals

Analogue, 4...20 mA

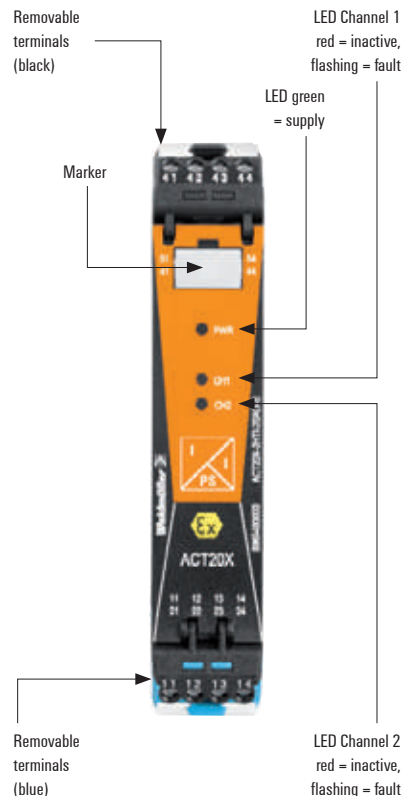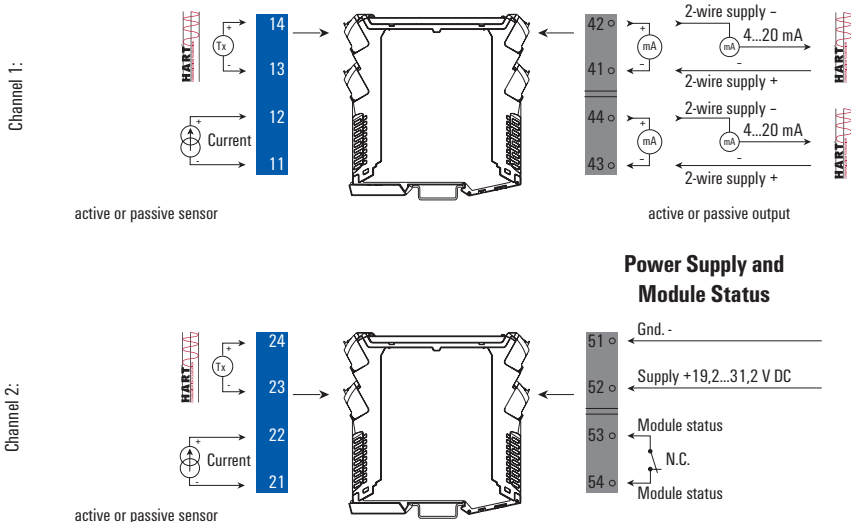


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-----------|-----------------------------------|
| ATEX | FM | U_o/U_i | 0 V / 30 V |
| II 3 G Ex nA nC IIC T4 Gc | Installation in CL I DIV2 GP A-D T4 | I_o/I_i | 0 mA / 120 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G or | P_o/P_i | 0 mW / 0,85 W |
| II (1) D [Ex ia Da] IIIC | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | L_i | 0 μ H |
| | Example: | C_i | 2 nF |
| IECEX | ATEX version, | IIC | $C_o = 0,08 \mu$ F, $L_o = 3$ mH |
| Ex nA nC IIC T4 Gc | Ex input, External Current Source: | IIB | $C_o = 0,6 \mu$ F, $L_o = 12$ mH |
| [Ex ia Ga] IIC/IIB/IIA | (More details in ATEX certificate) | IIA | $C_o = 2,15 \mu$ F, $L_o = 25$ mH |



Application example:


Measuring temperature with a head transmitter, signal transmission with HART®

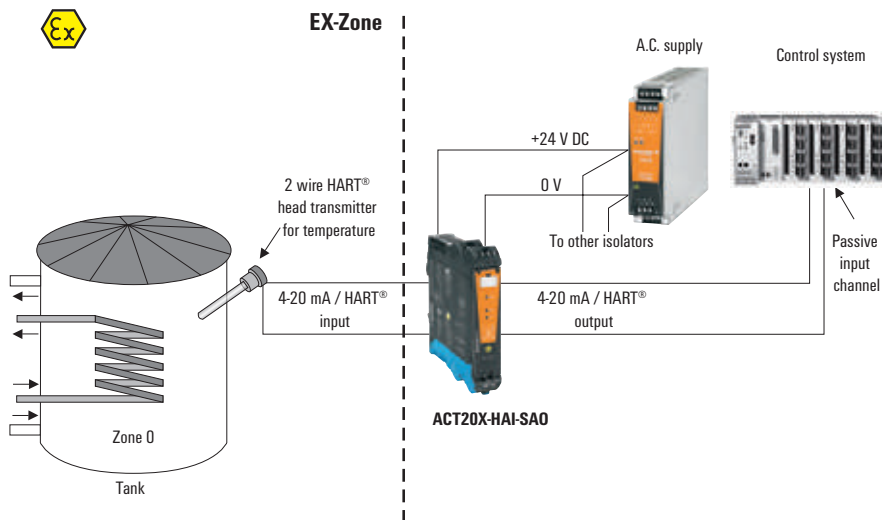

Current supply isolator

- Converts analogue signals from Ex zone 0 into analogue output signals for safe zones.
- Active and passive current inputs/outputs
- HART® - transparent
- PC configuration with FDT/DTM software, download link at www.weidmueller.com
- Relay output for failure alarm
- 2-channel module, can also be used as a signal splitter

ACT20X-HAI-SA0-S / 2HAI-2SA0-S



Technical data

| Input | |
|---|---|
| Input current | 4...20 mA |
| Sensor supply | ≤ 28 V DC |
| Residual ripple (current loop) | < 7.5 mV _{eff} |
| Output analogue | |
| Output current | 4...20 mA |
| Output signal limit | < 28 mA |
| load impedance current | ≤ 600 Ω |
| 2-wire supply | ≤ 26 V DC |
| Accuracy | < 0.1% span |
| Temperature coefficient | < 0.01% of span/°C (TU) |
| Step response time | ≤ 5 ms |
| Cut-off frequency (-3 dB) | 0.5...2.5 kHz @ 3.5...23 mA bi-directional HART® signal |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| Power consumption | ≤ 3 W (2 channels) |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DEKRAATEX; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECXDEK |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| Screw connection, Removable terminal block | |
|--|------------------|
| | 2.5/0.5/2.5 |
| | 113.6/22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| 1-channel version | | |
| ACT20X-HAI-SA0-S | 1 | 8965430000 |
| 2-channel version | | |
| ACT20X-2HAI-2SA0-S | 1 | 8965440000 |

CBX200 USB configuration adapter - 8978580000

ACT20X

Current output isolator, HART® Transparent

The ACT20X-SAI-HAO current output isolator is HART®-transparent. The input is connected to the safe area controller or PLC, and the output is connected to an analog actuator in a hazardous area, e.g. Zone 0. It is available in a single-channel or double-channel version.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2


Ex Output signals




Input signals

Analogue, 4...20 mA



Channel 1:

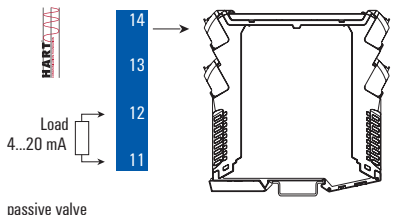

Channel 2:

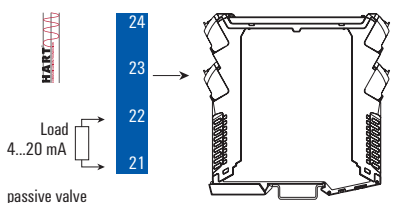

Power Supply and Module Status

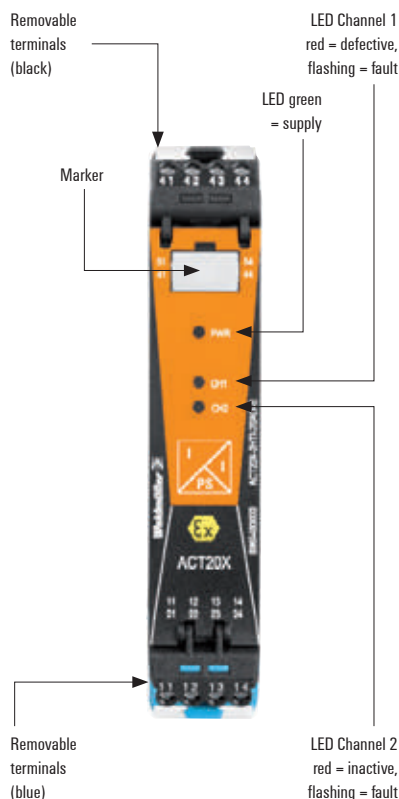


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-------|---|
| ATEX | FM | U_o | 28 V |
| II 3 G Ex nA nC IIC T4 Gc | Installation in CL I DIV2 GP A-D T4 | I_o | 93 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G or | P_o | 0.65 W |
| II (1) D [Ex ia Da] IIIC | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | IIC | $C_o = 0.08 \mu F, L_o = 4 \text{ mH}$ |
| IECEX | Example: | IIB | $C_o = 0.65 \mu F, L_o = 16 \text{ mH}$ |
| Ex nA nC IIC T4 Gc | ATEX version, | IIA | $C_o = 2.15 \mu F, L_o = 32 \text{ mH}$ |
| [Ex ia Ga] IIC/IIB/IIA | Ex output, | | |
| [Ex ia Da] IIIC | (More details in ATEX certificate) | | |




Application example: controlling an actuator in the Ex zone.

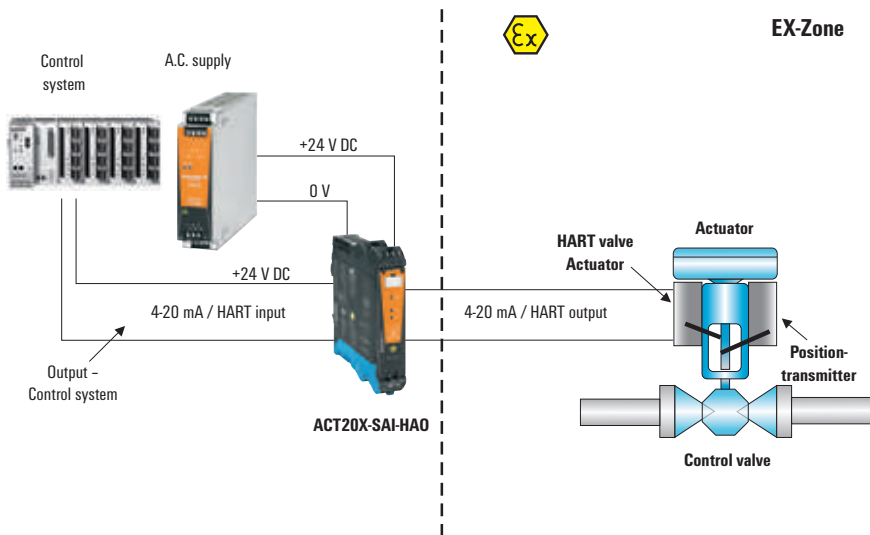

Current output isolator

- For controlling field devices located in explosion risk zones
- HART® Transparent
- Relay output for error alarm
- PC configuration with FDT/DTM software, download at www.weidmuller.com
- 1 or 2 channels in one module

ACT20X-SAI-HA0-S / 2SAI-2HA0-S



Technical data

| | |
|---|---|
| Input | |
| Input current | 4...20mA |
| Voltage drop | < 2 V |
| Output analogue | |
| Output current | 4...20 mA (max. 23 mA) |
| Output signal limit | < 28 mA |
| load impedance current | ≤ 725 Ω |
| 2-wire supply | > 14.5 V @ 20 mA |
| Residual ripple (current loop) | < 7.5 mV _{eff} |
| Accuracy | < 0.1% span |
| Temperature coefficient | < 0.01% of span/°C (TU) |
| Step response time | ≤ 5 ms |
| Cut-off frequency (-3 dB) | 0.5...2.5 kHz @ 3.5...23 mA bi-directional HART® signal |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| Power consumption | ≤ 3 W (2 channels) |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DEKRAATEX; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECXDEK |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|---|------------------|
| Screw connection, Removable terminal block | |
| | 2.5/0.5/2.5 |
| | 113.6/22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| 1-channel version | | |
| ACT20X-SAI-HA0-S | 1 | 8965450000 |
| 2-channel version | | |
| ACT20X-2SAI-2HA0-S | 1 | 8965460000 |

CBX200 USB configuration adapter - 8978580000


ACT20X

Temperature transducer

The ACT20X-HTI-SAO temperature transducer processes temperature signals from PT100 sensors and thermocouples originating in the Ex zone. A current signal (mA) can also be connected as the input signal. The input is part of an intrinsically safe circuit (Zone 0). The isolated milliamp analogue output is the input to the receiver or controller in the safe area. It is available in a single-channel or double-channel version.

EX area Zone 0, 1, 2, 20, 21, 22



Safe area Zone 2 / FM Class 1, Division 2

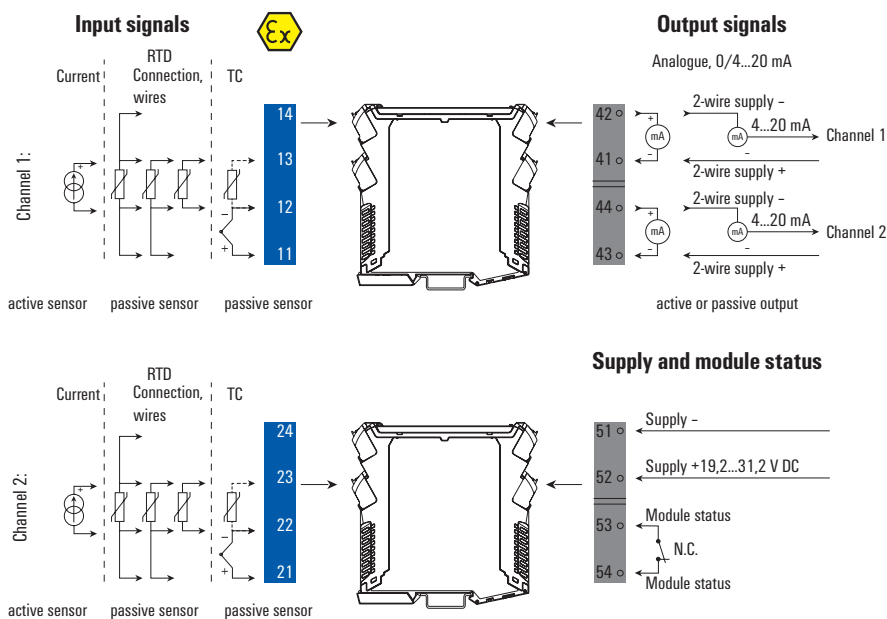

Ex label (excerpt)

| | | | |
|------------------------------|-------------------------------------|---------------|------------------------------------|
| ATEX | FM | U_o/U_i | 8.7 V / 10 V |
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I_o/I_i | 18.4 mA / 30 mA |
| II (1) G [Ex ia] IIC/IIB/IIA | KI, III ABT 1/2 GP A-G or | P_o | 400 mW |
| II (1) D [Ex iaD] | KI, I Zn2 AEx/Ex nA nC [ia] IIC T4 | $L_o/R_o/L_i$ | 892 μ H/ Ω / 820 nH |
| | Example: | C_i | 30 nF |
| IECEX | ATEX version, | IIC | $C_o = 5 \mu$ F, $L_o = 100$ mH |
| Ex nA nC IIC T4 Gc | Ex input Temperature, | IIB | $C_o = 50 \mu$ F, $L_o = 300$ mH |
| [Ex ia Ga] IIC/IIB/IIA | (More details in ATEX certificate) | IIA | $C_o = 1000 \mu$ F, $L_o = 700$ mH |

Application example: temperature measurements in the Ex zone

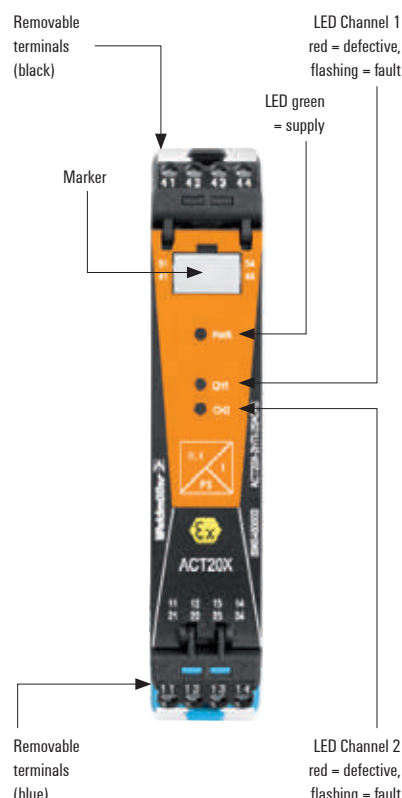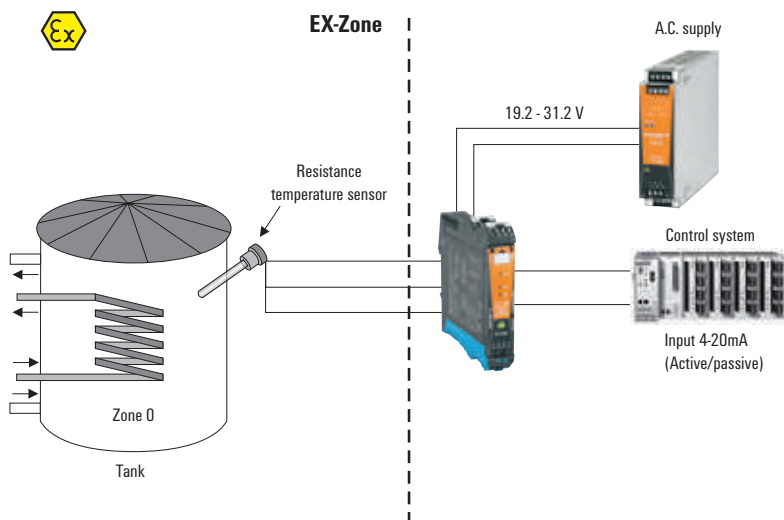


Accuracy / temperature coefficients
ACT20X-HTI-SAO

| Input | Accuracy | Temperature coefficient |
|--------------------------|--------------------|-------------------------|
| Input mA | $\leq \pm 4 \mu$ A | $\leq \pm 4 \mu$ A / °C |
| Input RTD | | |
| Pt100 | $\leq \pm 0.2$ °C | $\leq \pm 0.02$ °C / °C |
| Ni100 | $\leq \pm 0.3$ °C | $\leq \pm 0.03$ °C / °C |
| Input TC | | |
| Type B | $\leq \pm 4.5$ °C | $\leq \pm 0.45$ °C / °C |
| Type E, J, K, L, N, T, U | $\leq \pm 1$ °C | $\leq \pm 0.1$ °C / °C |
| Type R, S, W3, W5, LR | $\leq \pm 2$ °C | $\leq \pm 0.2$ °C / °C |
| Note | | |

Temperature transducer

- Converts intrinsically safe RTD, thermocouple and mA signals into analogue signals for safe zones.
- PC configuration with FDT/DTM software, download link at www.weidmuller.com
- Relay output for failure alarm
- 1 or 2 channels in one module
- 2-channel module, can also be used as a signal splitter

ACT20X-HTI-2SA0-S / 2HTI-2SA0-S



Usable as:

- Safety barrier (insulator)
- Signal conversion
- 2-wire measuring transducer
- Amplifier, repeater

Technical data

| Input | |
|---|-----------------|
| Type | |
| Sensor supply | |
| Temperature input range | |
| Line resistance in measuring circuit | |
| Input current | |
| Input resistance, current | |
| Output | |
| Output current | |
| Output signal limit | |
| load impedance current | |
| Influence of load resistance | |
| Current loop output | |
| Output current (current loop) | |
| Load resistance | |
| Influence of load resistance | |
| 2-wire supply | |
| Alarm output | |
| Type | |
| Nominal switching voltage | |
| Continuous current | |
| Power rating | |
| General data | |
| Supply voltage | |
| Power consumption | |
| Tightening torque, min. / Tightening torque, max. | |
| Ambient temperature / Storage temperature | |
| Approvals | |
| Approvals | |
| Insulation coordination | |
| Insulation voltage | |
| Rated voltage | |
| EMC standards | |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |
| Note | |

| intrinsically safe circuit, RTD, TC, DC (mA) | |
|--|--|
| Configurable | |
| ≤ 50 Ω | |
| 0...20 mA, 4...20mA | |
| 20 Ω + PTC 50 Ω | |
| 0...23 mA, configurable: 0...20 / 4...20 / 20...0 / 20...4 mA, configurable downscale (3.5 mA) / upscale (23 mA) @ error | |
| ≤ 600 Ω | |
| ≤ 0.01% of span / 100 Ω | |
| 4...20 mA | |
| (U _g - 3.5) / 0.023 A | |
| ≤ 0.01% of span / 100 Ω | |
| 3.5...26 V DC | |
| Relay, 1 NC (voltage-free) | |
| ≤ 125 V AC / 110 V DC (safe area) | |
| ≤ 32 V AC / 32 V DC (Zone 2) | |
| ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) | |
| ≤ 62.5 VA / 32 W (safe area) | |
| ≤ 16 VA / 32 W (Zone 2) | |
| 19.2 - 31.2 V DC | |
| ≤ 3 W (2 channels) | |
| 0.4 Nm / 0.6 Nm | |
| / -20 °C...60 °C / -20 °C...85 °C | |
| cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX | |
| 2.6 kV (input / output) | |
| 300 V | |
| DIN EN 61326, NE 21 | |
| Screw connection, Removable terminal block | |
| 2.5/0.5/2.5 | |
| 22.5/117.2 | |

| Type | Temperature-range | Accuracy |
|---------------------------------|-------------------|--|
| Metal PTC | | |
| Pt100 | -200...850 °C | ± (0.15 + 0.02 x T) Class A ± (0.30 °C + 0.005 x T) Class B |
| Pt500 | -200...850 °C | |
| Pt1000 | -200...850 °C | |
| Ni50 | | ± (0.4 + 0.007 x T) ± (0.4 + 0.028 x T) |
| Ni100 | -60...0 °C | |
| Ni120 | 0...180 °C | |
| Ni1000 | | |
| TC-Type according to IEC60584-1 | | |
| B | 50...250 °C | ± 25 K |
| | 250...500 °C | ± 10 K |
| | 500...1820 °C | ± 6 K |
| E | -200...-150 °C | ± 4 K |
| | -150...1000 °C | ± 3 K |
| J | -200...-150 °C | ± 4 K |
| | -150...1200 °C | ± 3 K |
| K | -200...-150 °C | ± 5 K |
| | -150...1200 °C | ± 3 K |
| | 1200...1372 °C | ± 4 K |
| | -200...-150 °C | ± 6 K |
| N | -150...1300 °C | ± 3 K |
| | -50...200 °C | ± 10 K |
| R | 200...1780 °C | ± 6 K |
| | -50...200 °C | ± 10 K |
| S | 200...1780 °C | ± 6 K |
| | -200...-150 °C | ± 5 K |
| T | -150...400 °C | ± 3 K |
| | | |
| according to DIN43710 | | |
| U | 0...600 °C | ± 3 °C |
| L | 0...900 °C | ± 3 °C |

Ordering data

| Type | Qty. | Order No. |
|--------------------|------|------------|
| 1-channel version | | |
| ACT20X-HTI-2SA0-S | 1 | 8965470000 |
| 2-channel version | | |
| ACT20X-2HTI-2SA0-S | 1 | 8965480000 |

CBX200 USB configuration adapter - 8978580000



ACT20X

Universal measurement and signal isolator-converter

The ACT20X-HUI-SA0-S is a universal input signal isolator/converter. This model processes temperature signals from PT100 sensors and thermocouples as well as DC voltage and current signals (mA) from the hazardous area. On the output side, an isolated milliamp signal is passed to the receiver or controller in the safe area. This model also has a relay output which can be used for a process alarm or trip.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2

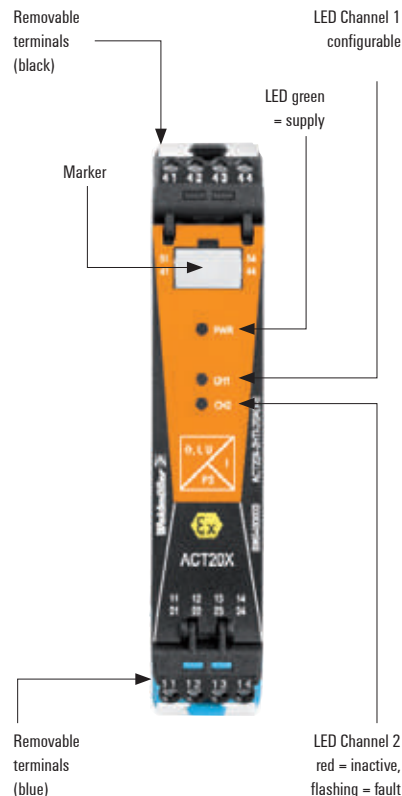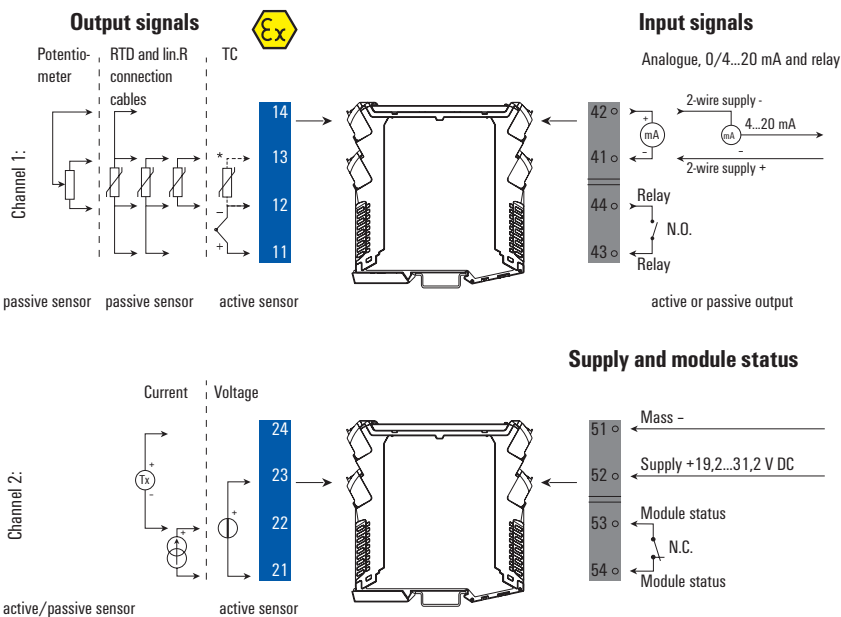


Ex label (excerpt)

| ATEX | FM | U _i / U _o | 30 V / 8.3 V |
|------------------------------|-------------------------------------|---------------------------------|---|
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I _i / I _o | 120 mA / 0.2 mA |
| II (1) G [Ex ia] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G or | P _i / P _o | 900 mW / 0.4 mW |
| II (1) D [Ex iaD] | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | C _i | 3 nF |
| IECEx | Example: | L _i | 1 μH |
| Ex nA nC IIC T4 Gc | ATEX version, | IIC | C _o = 7 μF L _o = 1000 mH |
| [Ex ia Ga] IIC/IIB/IIA | Ex input External Current Source | IIB | C _o = 73 μF L _o = 1000 mH |
| [Ex ia a] IIC | (More details in ATEX certificate) | IIA | C _o = 1000 μF L _o = 1000 mH |



Application example: position measurement of an actuator

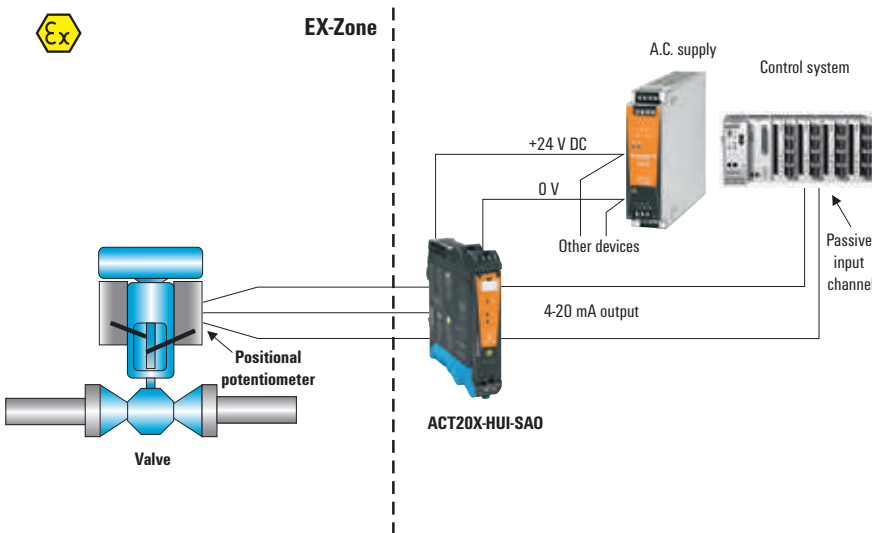


Accuracy / temperature coefficients ACT20X-HUI-SA0

| Input | Accuracy | Temperature coefficient |
|--------------------------|-----------|-------------------------|
| Input mA | ≤ ±4 μA | ≤ ±4 μA / °C |
| Input Volt | ≤ ±20 μV | ≤ ±2 μV / °C |
| Input RTD | | |
| Pt100 | ≤ ±0.2 °C | ≤ ±0.02 °C / °C |
| Ni100 | ≤ ±0.3 °C | ≤ ±0.03 °C / °C |
| Input TC | | |
| Type B | ≤ ±4.5 °C | ≤ ±0.45 °C / °C |
| Type E, J, K, L, N, T, U | ≤ ±1 °C | ≤ ±0.1 °C / °C |
| Type R, S, W3, W5, LR | ≤ ±2 °C | ≤ ±0.2 °C / °C |
| Note | | |

Universal signal converter

- Universal isolator for intrinsically safe RTD signals, thermal sensor signals, resistor signals, potentiometer signals and DC signals (mA, V)
- PC configuration with FDT/DTM software, download at www.weidmueller.com
- Digital relay output adjustable as threshold switch
- Relay output for error alarm

ACT20X-HUI-SA0-S



Usable as:

- Safety barrier (insulator)
- Signal conversion
- 2-wire measuring transducer
- Amplifier, repeater

Technical data

| Input | |
|---|--|
| Type | intrinsically safe circuit, active (as current source) or passive (as current sink) |
| Sensor supply | 28...16.5 V DC/0...20 mA |
| Temperature input range | Adjustable from -200...+800°C |
| Line resistance in measuring circuit | ≤ 50 Ω |
| Input current | 0...20 mA, 4...20mA, ± 25 mA |
| Input voltage | 0...12 V DC, configurable: 0.1 / 0.2...1 / 0.5 / 0...10 and 2...10 V DC |
| Potentiometer | 10 Ω...10 kΩ |
| Input resistance, voltage/current | > 10 MΩ @ 600 mV, 2 MΩ @ 28 V / 20 Ω + PTC 50 Ω |
| Output analogue | |
| Output current | 0...23 mA, configurable: 0...20 / 4...20 / 20...0 / 20...4 mA, configurable downscale (3.5 mA) / upscale (23 mA) @ error |
| Output signal limit | 3.8...20.5 mA / 0...20.5 mA (dependent on range) |
| load impedance current | ≤ 600 Ω |
| Influence of load resistance | ≤ 0.01% of span / 100 Ω |
| Current loop output | |
| Output current (current loop) | 4...20 mA |
| Load resistance | ≤ (Vs - 10) / 20 mA (current loop) |
| Influence of load resistance | ≤ 0.01% of span / 100 Ω |
| 2-wire supply | ≤ 26 V DC |
| Output digital | |
| Type | Relay, 1 NO / NC contact |
| Function | Configurable switching thresholds, Sensor error, Window function |
| Nominal switching voltage | ≤ 250 V AC / 30 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) ≤ 2 A AC/DC (safe area, Zone 2 area) |
| Continuous current | ≤ 2 A AC/DC (safe area, Zone 2 area) |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| Power consumption | ≤ 3.5 W |
| Tightening torque, min. / Tightening torque, max. | 0.4 Nm / 0.6 Nm |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX |
| Insulation coordination | |
| Insulation voltage / Rated voltage | 2.6 kV (input / output) / 300 V |
| EMC standards | DIN EN 61326, NE 21 |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5/0.5/2.5 mm ² |
| Length x width x height | 22.5/117.2 mm |
| Note | |
| | |
| Screw connection, Removable terminal block | |
| | 2.5/0.5/2.5 |
| | 22.5/117.2 |

| Type | Temperature-range | Accuracy |
|---------------------------------|-------------------|--|
| Metal PTC | | |
| Pt100 | -200...850 °C | ± (0.15 + 0.02 x T) Class A ± (0.30 °C + 0.005 x T) Class B |
| Pt500 | -200...850 °C | |
| Pt1000 | -200...850 °C | |
| Ni50 | | ± (0.4 + 0.007 x T) ± (0.4 + 0.028 x T) |
| Ni100 | -60...0 °C | |
| Ni120 | 0...180 °C | |
| Ni1000 | | |
| TC-Type according to IEC60584-1 | | |
| B | 50...250 °C | ± 25 K |
| | 250...500 °C | ± 10 K |
| | 500...1820 °C | ± 6 K |
| E | -200...-150 °C | ± 4 K |
| | -150...1000 °C | ± 3 K |
| J | -200...-150 °C | ± 4 K |
| | -150...1200 °C | ± 3 K |
| K | -200...-150 °C | ± 5 K |
| | -150...1200 °C | ± 3 K |
| | 1200...1372 °C | ± 4 K |
| | | |
| N | -200...-150 °C | ± 6 K |
| | -150...1300 °C | ± 3 K |
| R | -50...200 °C | ± 10 K |
| | 200...1780 °C | ± 6 K |
| S | -50...200 °C | ± 10 K |
| | 200...1780 °C | ± 6 K |
| T | -200...-150 °C | ± 5 K |
| | -150...400 °C | ± 3 K |
| according to DIN43710 | | |
| U | 0...600 °C | ± 3 °C |
| L | 0...900 °C | ± 3 °C |

Ordering data

| Type | Qty. | Order No. |
|-------------------|------|------------|
| 1-channel version | | |
| ACT20X-HUI-SA0-S | 1 | 8965490000 |

CBX200 USB configuration adapter - 8978580000

ACT20X


Output loop powered universal measurement and signal isolating converter

The ACT20X-HUI-SA0-LP is a universal input, isolating signal converter. This model processes temperature signals from PT100 sensors and thermocouples as well as DC voltage and current signals (mA) from the hazardous area. The 12.5 mm wide module is powered through it's 4-20 mA output.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2

B

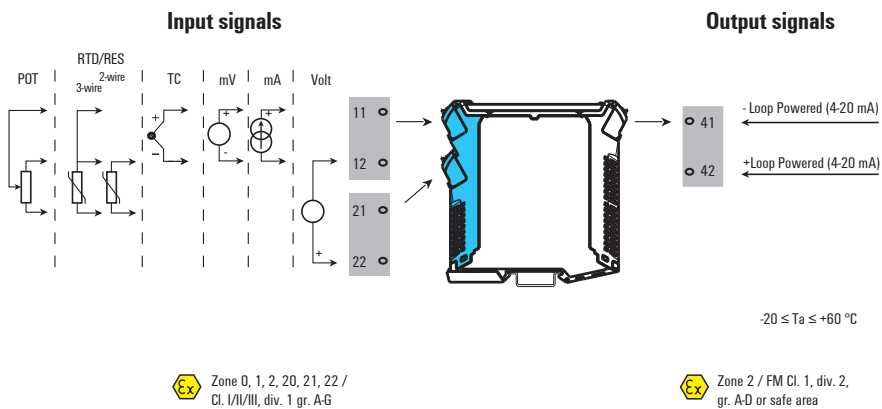

Removable terminals (blue)




Ex label

| | | |
|--------------------------------------|-------|---------------------|
| ATEX | U_o | 5.88 V |
| II 3 G Ex nA nC IIC T4 | I_o | 3.1 mA |
| II (1) G [Ex ia] IIC/IIB/IIA | P_o | 4.6 mW |
| II (1) D [Ex iaD] | C_i | 0.001 μF |
| IECEX | L_i | negligible |
| Ex nA IIC T4 Gc | | |
| [Ex ia Ma Ga] I/IIC [Ex ia Da] I/IIC | | |

Example: IECEx version (More details in IECEx certificate)

Application example: Temperature measurement in the EX-zone

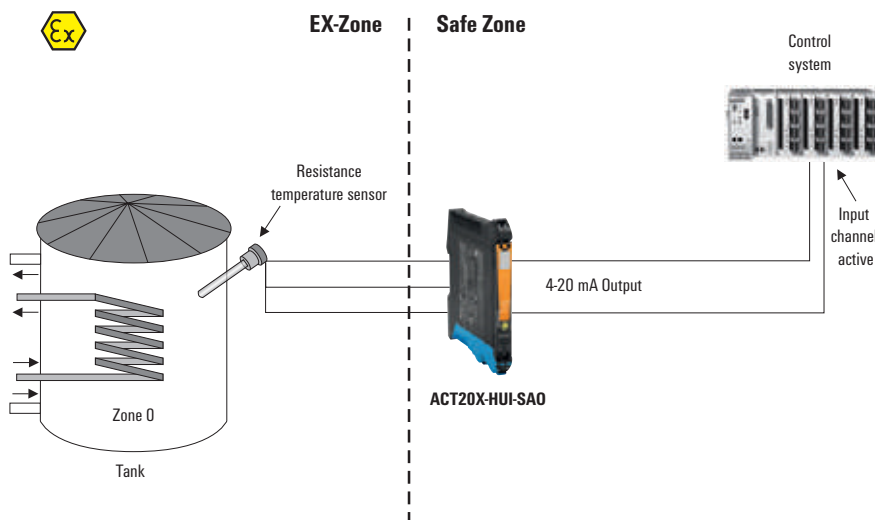

Accuracy / temperature coefficients ACT20X-HUI-SA0-LP


| Input | Accuracy | Temperature coefficient |
|--------------------------|---------------------------------------|---|
| Input mA | $\leq \pm 4 \mu\text{A}$ | $\leq \pm 4 \mu\text{A} / ^\circ\text{C}$ |
| Input Volt | $\leq \pm 20 \mu\text{V}$ | $\leq \pm 2 \mu\text{V} / ^\circ\text{C}$ |
| Input RTD | | |
| Pt100 | $\leq \pm 0.2 \text{ }^\circ\text{C}$ | $\leq \pm 0.02 \text{ }^\circ\text{C} / ^\circ\text{C}$ |
| Ni100 | $\leq \pm 0.3 \text{ }^\circ\text{C}$ | $\leq \pm 0.03 \text{ }^\circ\text{C} / ^\circ\text{C}$ |
| Input TC | | |
| Type B | $\leq \pm 4.5 \text{ }^\circ\text{C}$ | $\leq \pm 0.45 \text{ }^\circ\text{C} / ^\circ\text{C}$ |
| Type E, J, K, L, N, T, U | $\leq \pm 1 \text{ }^\circ\text{C}$ | $\leq \pm 0.1 \text{ }^\circ\text{C} / ^\circ\text{C}$ |
| Type R, S, W3, W5, LR | $\leq \pm 2 \text{ }^\circ\text{C}$ | $\leq \pm 0.2 \text{ }^\circ\text{C} / ^\circ\text{C}$ |
| Note | | |

Universal measurement and signal isolator-converter

Output-loop powered

- Universal isolator for intrinsically safe RTD signals, thermal sensor signals, resistor signals, potentiometer signals and DC signals (mA,V)
- Supply via output loop
- 12.5 mm thin housing
- PC configuration with FDT/DTM software, download at www.weidmuller.com

ACT20X-HUI-SA0-LP-S



Technical data

| Input | |
|-------------------------|--|
| Type | |
| Temperature input range | |
| Input current | |
| Input voltage | |

| | |
|-----------------------------------|--|
| Potentiometer | |
| Input resistance, voltage/current | |

| Output analogue | |
|--------------------------------|--|
| Output current | |
| load impedance current | |
| Residual ripple (current loop) | |
| Accuracy | |
| Temperature coefficient | |
| Step response time | |
| Cut-off frequency (-3 dB) | |

| General data | |
|---|--|
| Supply voltage | |
| Tightening torque, min. / Tightening torque, max. | |
| Ambient temperature / Storage temperature | |

| Approvals | |
|-----------|--|
| Approvals | |

| Insulation coordination | |
|------------------------------------|--|
| Insulation voltage / Rated voltage | |
| Rated voltage | |
| Standards | |

| | |
|---------------------------|--|
| Impulse withstand voltage | |
| Overvoltage category | |
| Pollution degree | |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Depth/Width/Height | |
| Note | |

| | |
|--|--|
| intrinsically safe circuit | |
| Adjustable from -200...+800°C | |
| configurable, ± 25 mA, 0...20 mA, 4...20mA | |
| configurable, ± 12 V DC (min. measurement range 1 V), ± 28 V DC (min. measurement range 2 V), ± 600 mV DC (min. measurement range 50 mV), ± 150 mV DC (min. measurement range 15 mV) | |
| 10 Ω...10 kΩ | |
| > 10 MΩ @ 600 mV, 2 MΩ @ 28 V / 70 Ω | |

| | |
|-----------------------------------|--|
| 4...20 mA (max. 23 mA) | |
| ≤ 700 Ω | |
| ≤ 10 mV _{ss} | |
| < 0.1 % of end value | |
| < 0.02 °C of measuring range / °C | |
| < 400 ms (10...90 %) | |
| 100 Hz | |

| | |
|--|--|
| via output current loop, 11...28 V DC (loop powered) | |
| 0.4 Nm / 0.6 Nm | |
| / 0 °C...60 °C / -20 °C...70 °C | |

| | |
|-----------------|--|
| CE; EAC; GOSTEX | |
|-----------------|--|

| | |
|---|--|
| 3.51 kV between input and output / 300 V _{eff} | |
| 300 V _{eff} | |
| DIN EN 61326-1, IEC 61010-1, IEC 61010-2-030, IEC 60079-0, IEC 60079-11, IEC 60079-15, IEC 60079-26 | |

| | |
|------------------|--|
| 4 kV (1.2/50 μs) | |
| III | |
| 2 | |

| Screw connection, Removable terminal block | |
|--|--|
| 2.5/0.5/2.5 | |
| 113.6/12.5/117.2117.2 | |

| Inputs | | | | | |
|--------------------|--|-------------|-------------|-----------|--------|
| Type | Thermocouples (TC), RTD, mA, Volt, mV, resistor, potentiometer | | | | |
| Type | Standard | Lower limit | Upper limit | Min. area | |
| B | | 100 °C | 1820 °C | 400 °C | |
| E | IEC584 | -270 °C | 1000 °C | 80 °C | |
| J | | -270 °C | 1200 °C | | |
| K | | -270 °C | 1372 °C | | |
| L | DIN43710 | -100 °C | 900 °C | | |
| N | IEC584 | -180 °C | 1300 °C | 100 °C | |
| R, S | | -50 °C | 1768 °C | 300 °C | |
| T | | -270 °C | 400 °C | 80 °C | |
| U | DIN43710 | -200 °C | 600 °C | 100 °C | |
| User-defined Input | Up to 101 values | | | | |
| Error detection | Upper error signalling value: 23 mA, Lower error signalling value: 3.5 mA | | | | |
| mA | ±25 mA @ 70 Ω | | 4 mA | | |
| Volt | ±28 V @ 2 MΩ | | 2.0 V | | |
| | ±12 V @ 2 MΩ | | 1.0 V | | |
| mV | ±600 mV @ >10 MΩ | | 50 mV | | |
| | ±150 mV @ >10 MΩ | | 15 mV | | |
| Type | Standard | Lower limit | Upper limit | Min. area | |
| 2-, 3-, 4-wire RTD | Pt100, | DIN43710 | -200 °C | 850 °C | -20 °C |
| | Pt200 | | | | |
| | Pt1000 | | | | |
| | Ni120 | | -80 °C | 320 °C | 15 °C |
| | Cu10 | | -100 °C | 260 °C | 100 °C |
| User-defined Input | Up to 101 values | | | | |
| Resistance | 0 to 12 kΩ | | 500 Ω | | |
| | 0 to 15 kΩ | | 100 Ω | | |
| | 0 to 750 Ω | | 50 Ω | | |
| Potentiometer | 1.2 kΩ to 500 kΩ | | | | |

Ordering data

| Type | Qty. | Order No. |
|---------------------|------|------------|
| 1-channel version | | |
| ACT20X-HUI-SA0-LP-S | 1 | 1318220000 |

CBX200 USB configuration adapter - 8978580000

ACT20X



NAMUR isolating switching amplifier: with relay output

The ACT20X-HDI-SDO-RNO (NC) isolating switching amplifier is a specialised signal isolating converter for Namur sensor signals or for volt-free contacts from a Zone 0 hazardous area. A single relay, available optionally as NC or NO, provides the output signal in the safe zone. Single-channel or double-channel versions are also available.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2

B

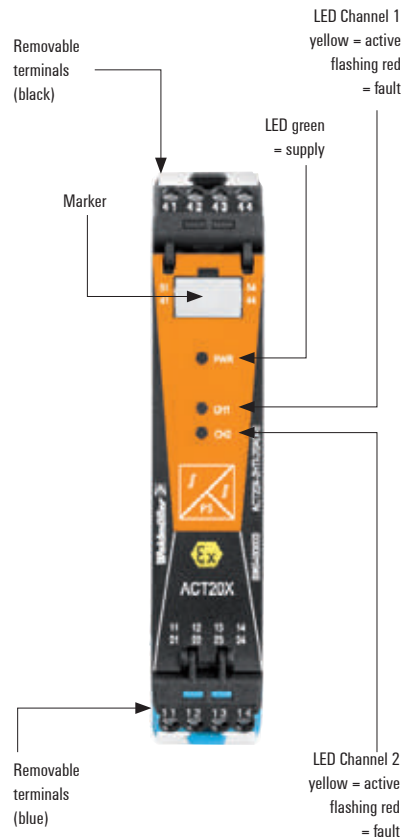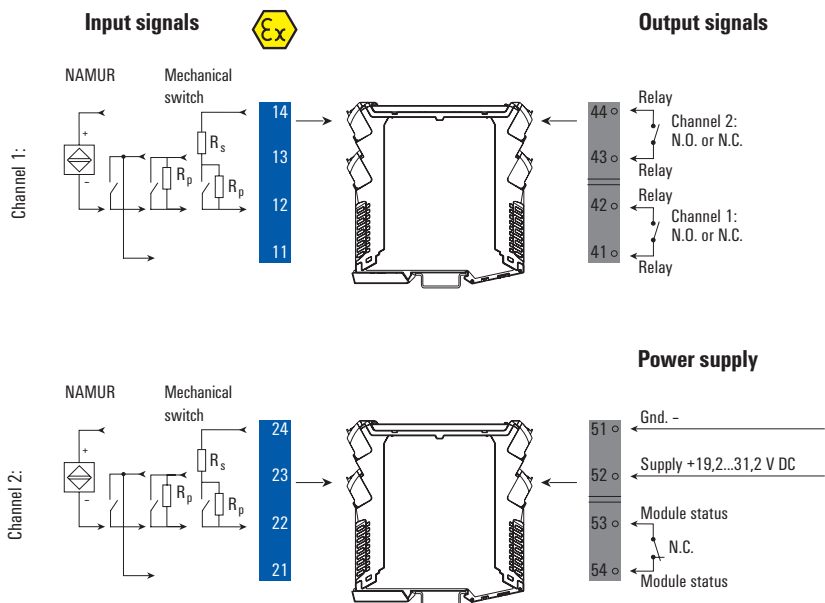


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-------------|-----------------------------------|
| ATEX | FM | U_o | 10.6 V |
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I_o | 12 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G oder | P_o | 32 mW |
| II (1) D [Ex iaD] | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | L_s / R_s | 1150 μ H/ Ω |
| IECEX | Example: | IIC | $C_o = 2 \mu$ F, $L_s = 260$ mH |
| Ex nA nC IIC T4 Gc | ATEX version, | IIB | $C_o = 6 \mu$ F, $L_s = 780$ mH |
| [Ex ia Ga] IIC/IIB/IIA | Ex input | IIA | $C_o = 18 \mu$ F, $L_s = 1000$ mH |
| [Ex ia Da] IIIC | (More details in ATEX certificate) | | |




Application: monitoring of fill level with the ACT20X HDI-SDO-RNO (relay output)

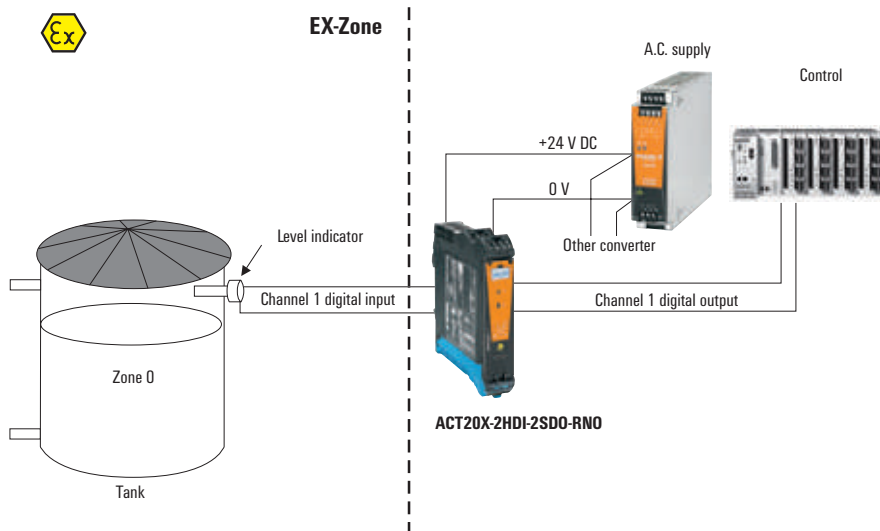

NAMUR isolating switching amplifier

- Converts intrinsically safe digital signals (NAMUR / switching contact) from EX Zone 0 into digital output signals (relay output) for the safe zone
- PC configuration with FDT/DTM software, download at www.weidmueller.com
- Relay output for error alarm, cable break, short-circuit
- 1 or 2 channels in one module

ACT20X-HDI-SDO-RNO-S / RNC-S
ACT20X-2HDI-2SDO-RNO-S / RNC-S**Technical data**

| Input | |
|---|--|
| Sensor | NAMUR sensor, according to EN60947, switch with or without RS, RP |
| Sensor supply | 8 V DC / 8 mA |
| Resistance | RP = 750 Ω / RS = 15kΩ |
| Input frequency | 0...5 kHz |
| Pulse duration | > 0.1 ms |
| Input resistance | 1 kΩ |
| Trigger level low / Trigger level high | < 1.2 mA / > 2.1 mA |
| Output signal in case of wire break | < 0.1 mA, > 6.5 mA (in case of wire break) |
| Output | |
| Type | Relay, 2 NC (voltage-free), Switching frequency 20 Hz, digital, output = input, direct or inverse (configurable) |
| Rated switching voltage | ≤ 250 V AC / 30 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 2 A AC/DC (safe area, Zone 2 area) |
| Power rating | ≤ 500 VA / 60 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| NAMUR supply | 8 V DC / 8 mA |
| Power consumption | ≤ 3 W (2 channels) |
| Tightening torque, min. / Tightening torque, max. | 0.4 Nm / 0.6 Nm |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |
| Note | |

| Screw connection, Removable terminal block | |
|--|-------------|
| | 2.5/0.5/2.5 |
| | 22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|---|------|------------|
| 1-channel version, NC | | |
| ACT20X-HDI-SDO-RNC-S | 1 | 8965350000 |
| 1-channel version, NO | | |
| ACT20X-HDI-SDO-RNO-S | 1 | 8965340000 |
| 2-channel version, NC | | |
| ACT20X-2HDI-2SDO-RNC-S | 1 | 8965380000 |
| 2-channel version, NO | | |
| ACT20X-2HDI-2SDO-RNO-S | 1 | 8965370000 |
| CBX200 USB configuration adapter - 8978580000 | | |


ACT20X

Pulse Isolator, with NPN transistor output.

The ACT20X-HDI-SDO isolating switching amplifier is a digital pulse signal isolator for Namur sensors or volt-free contacts from a Zone 0 hazardous area. A transistor (NPN) output is provided for the receiver or controller in the safe area. Single-channel or double-channel versions are also available.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2

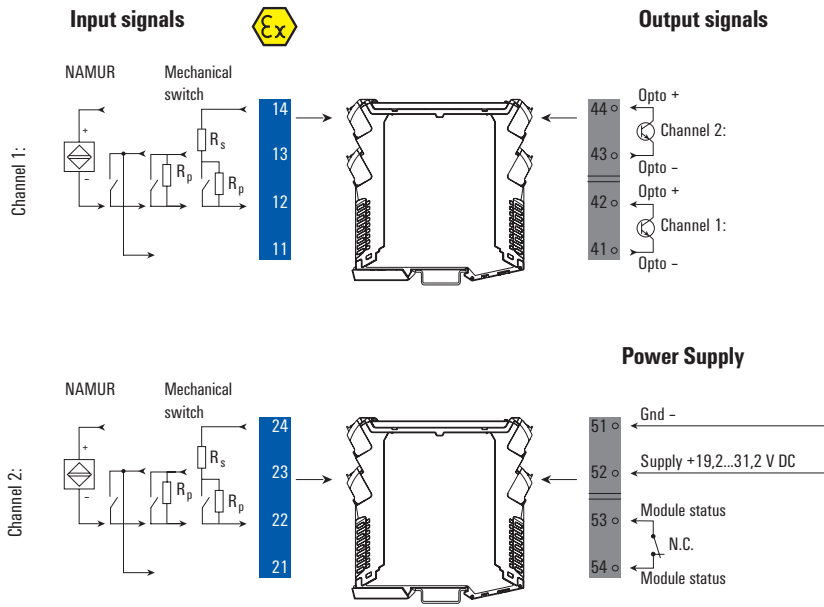


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-------------|-----------------------------------|
| ATEX | FM | U_o | 10.6 V |
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I_o | 12 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G oder | P_o | 32 mW |
| II (1) D [Ex iaD] | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | L_s / R_s | 1150 μ H/ Ω |
| IECEX | Example: | IIC | $C_o = 2 \mu$ F, $L_s = 260$ mH |
| Ex nA nC IIC T4 Gc | ATEX version | IIB | $C_o = 6 \mu$ F, $L_s = 780$ mH |
| [Ex ia Ga] IIC/IIB/IIA | Ex input | IIA | $C_o = 18 \mu$ F, $L_s = 1000$ mH |
| [Ex ia Da] IIIC | (More details in ATEX certificate) | | |




Application: monitoring the fill level with isolating switching amplifier

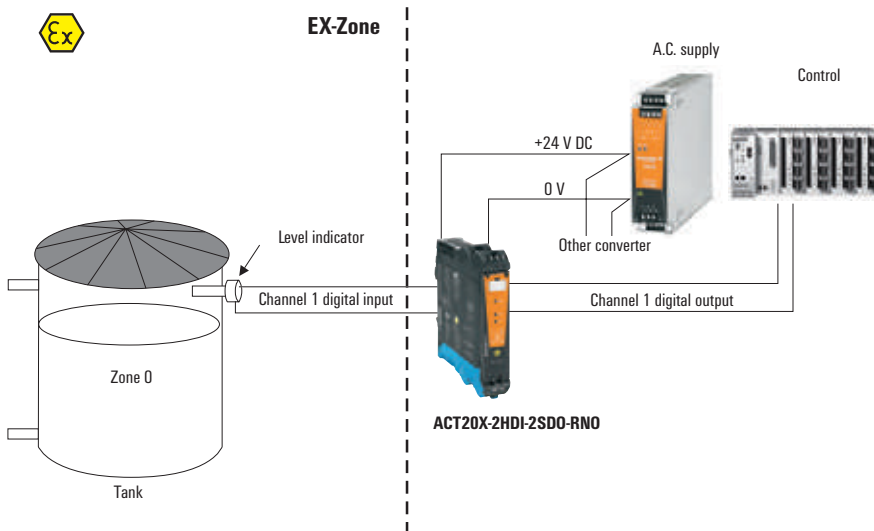

NAMUR isolating switching amplifier

- Converts intrinsically safe signals (NAMUR / switching contact) from EX Zone 0 into digital output signals (relay output) for the safe zone
- PC configuration with FDT/DTM software, download at www.weidmueller.com
- Relay output for error alarm
- 1 or 2 channels in one module

ACT20X-HDI-SDO-S / 2HDI-2SDO-S**Technical data**

| Input | |
|---|--|
| Sensor | NAMUR sensor, according to EN60947, switch with or without RS, RP |
| Sensor supply | 8 V DC / 8 mA |
| Resistance | Parallel resistor 15kΩ, Series resistor 750Ω |
| Input frequency | 0...5 kHz |
| Pulse duration | > 0.1 ms |
| Input resistance | 1 kΩ |
| Trigger level low / Trigger level high | < 1.2 mA / > 2.1 mA |
| Output signal in case of wire break | < 0.1 mA, > 6.5 mA (in case of wire break) |
| Output | |
| Type | NPN transistor output, digital, output = input, direct or inverse (configurable) |
| Switching frequency | 5 kHz |
| Pulse duration | > 0.1 ms |
| Rated switching voltage | ≤ 30 V DC |
| Power rating | ≤ 80 mA / ≤ 2.4 W |
| Voltage drop at max. load | < 2.5 V DC |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Power consumption | ≤ 3 W (2 channels) |
| Supply voltage | 19.2 - 31.2 V DC |
| NAMUR supply | 8 V DC / 8 mA |
| Power consumption | ≤ 3 W (2 channels) |
| Tightening torque, min. / Tightening torque, max. | 0.4 Nm / 0.6 Nm |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |

Note

| Screw connection, Removable terminal block | |
|--|-------------|
| | 2.5/0.5/2.5 |
| | 22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| 1-channel version | | |
| ACT20X-HDI-SDO-S | 1 | 8965360000 |
| 2-channel version | | |
| ACT20X-2HDI-2SDO-S | 1 | 8965390000 |

CBX200 USB configuration adapter - 8978580000

ACT20X

Valve control component for gas group IIC, 35 mA

The ACT20X-SDI-HAO-S solenoid/actuator driver takes a switched input from e.g. a safe area controller and delivers an corresponding output to operate an actuator in a hazardous area, e.g. Zone 0. It is available in a single-channel or double-channel version.




EX area Zone 0, 1, 2, 20, 21, 22

Save area Zone 2 /FM KI. 1 Abt. 2

Ex-Output Signals



Input signals

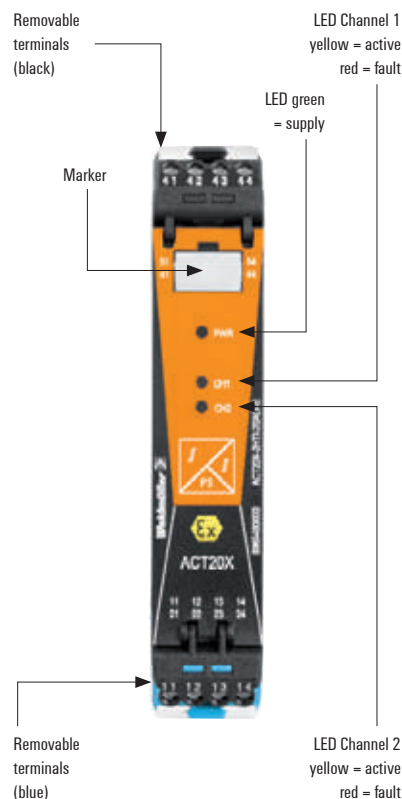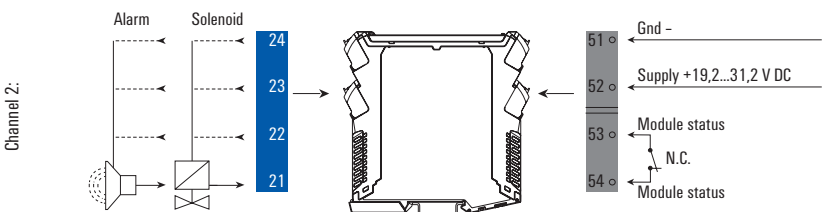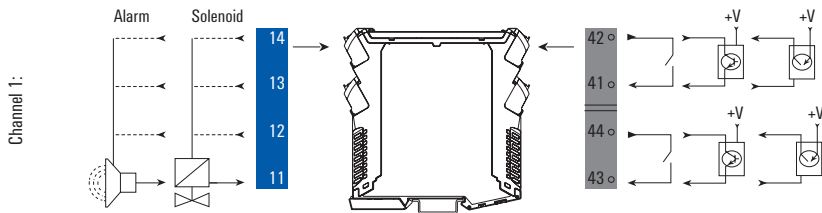


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-------|-----------------------------------|
| ATEX | FM | U_o | 28 V |
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I_o | 100 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G oder | P_o | 0.70 mW |
| II (1) D [Ex iaD] | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | IIC | $C_o = 0.08 \mu F, L_o = 2.9 mH$ |
| IECEX | Example: | IIB | $C_o = 0.64 \mu F, L_o = 12.8 mH$ |
| Ex nA nC IIC T4 Gc | ATEX version | IIA | $C_o = 2.1 \mu F, L_o = 22.8 mH$ |
| [Ex ia Ga] IIC/IIB/IIA | Ex Output Terminal (11-14) | | |
| [Ex ia Da] IIIC | (More details in ATEX certificate) | | |



Application: Inflow control in Ex zone with gas group IIC

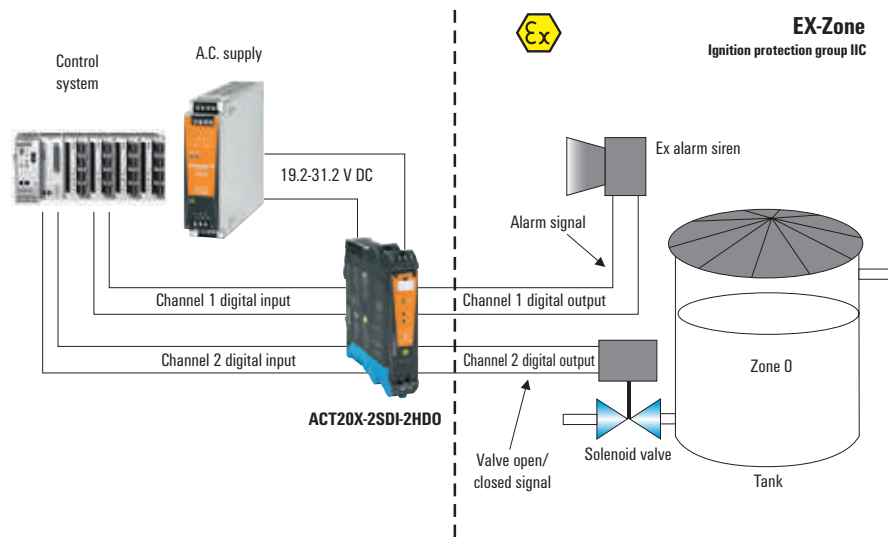

Output data

For gas group IIC (≤ 35 mA)

| Connection terminal | | | |
|---------------------|----------------|-------------|-------|
| Channel 1 | U without load | U with load | I max |
| 11-12 | Min. 24 V | Min. 12.5 V | 35 mA |
| 11-13 | Min. 24 V | Min. 13.5 V | 35 mA |
| 11-14 | Min. 24 V | Min. 14.5 V | 35 mA |

Note

For gas group IIC (≤ 35 mA)


| Connection terminal | | | |
|---------------------|----------------|-------------|-------|
| Channel 2 | U without load | U with load | I max |
| 21-22 | Min. 24 V | Min. 12.5 V | 35 mA |
| 21-23 | Min. 24 V | Min. 13.5 V | 35 mA |
| 21-24 | Min. 24 V | Min. 14.5 V | 35 mA |

Note

Valve control module

- Valve control component for control of intrinsically safe valves, LEDs, acoustic alarms, etc.
- PC configuration with FDT/DTM software, download at www.weidmueller.com
- Output current is limited to 35 mA for ignition group IIC
- 1 or 2 channels in one module
- Relay output for error alarm

ACT20X-SDI-HDO / 2SDI-2HDO



Technical data

| Input | |
|---|---|
| Type | NPN, PNP switching signal |
| Input voltage | ≤ 28 V DC |
| Input resistance, voltage | 3.5 kΩ |
| Trigger level low | ≤ 2.0 V DC (NPN), ≤ 8.0 V DC (PNP) |
| Trigger level high | ≥ 4.0 V DC (NPN), ≥ 10V DC (PNP) |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| Power consumption | ≤ 3.5 W (with 2 channels) |
| Tightening torque, min. / Tightening torque, max. | 0.4 Nm / 0.6 Nm |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |
| Note | |

| Screw connection, Removable terminal block | |
|--|-------------|
| | 2.5/0.5/2.5 |
| | 22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| 1-channel version | | |
| ACT20X-SDI-HDO-L-S | 1 | 8965400000 |
| 2-channel version | | |
| ACT20X-2SDI-2HDO-S | 1 | 8965420000 |

CBX200 USB configuration adapter - 8978580000



ACT20X

Valve control component for gas group IIB, 60 mA

The ACT20X-SDI-HAO-S solenoid/actuator driver takes a switched input from e.g. a safe area controller and delivers an corresponding output to operate an actuator in a hazardous area, e.g. Zone. This driver is suitable for switching solenoid valves or alarm devices.

EX area Zone 0, 1, 2, 20, 21, 22

Safe area Zone 2 / FM Class 1, Division 2

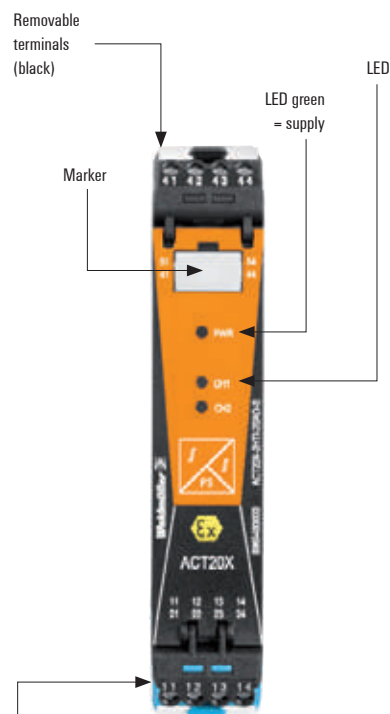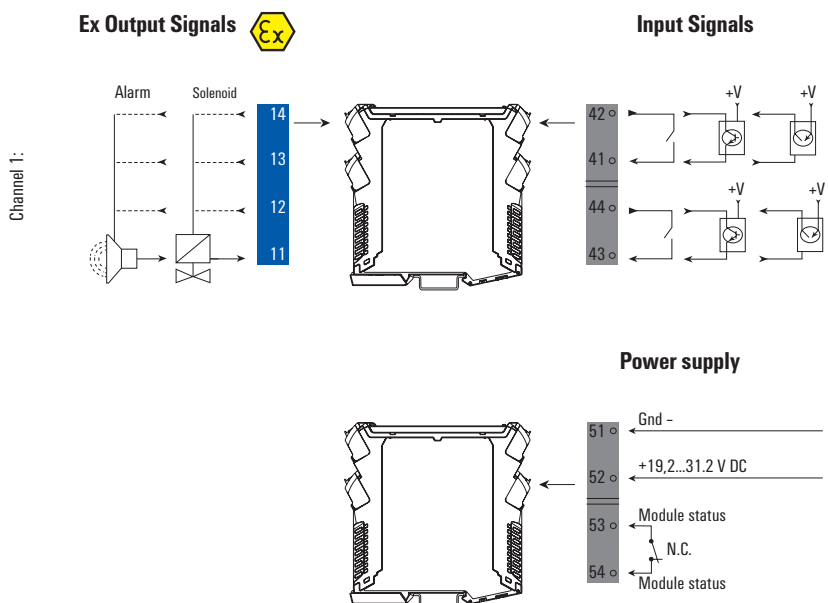


Ex label (excerpt)

| | | | |
|---------------------------------|-------------------------------------|-------|-------------------------------------|
| ATEX | FM | U_o | 28 V |
| II 3 G Ex nA nC IIC T4 | Installation in CL I DIV2 GP A-D T4 | I_o | 135 mA |
| II (1) G [Ex ia Ga] IIC/IIB/IIA | KI. III ABT 1/2 GP A-G oder | P_o | 0.95 W |
| II (1) D [Ex iaD] | KI. I Zn2 AEx/Ex nA nC [ia] IIC T4 | IIC | $C_o = -$, $L_o = -$ |
| IECEX | Example: | IIB | $C_o = 0.64 \mu F$, $L_o = 7.8 mH$ |
| Ex nA nC IIC T4 Gc | ATEX version, | IIA | $C_o = 2.1 \mu F$, $L_o = 15.1 mH$ |
| [Ex ia Ga] IIC/IIB/IIA | Ex Output Terminal (11-14) | | |
| [Ex ia Da] IIIC | (More details in ATEX certificate) | | |

Removable terminals (blue)



Application: Inflow control in Ex zone with gas group IIB

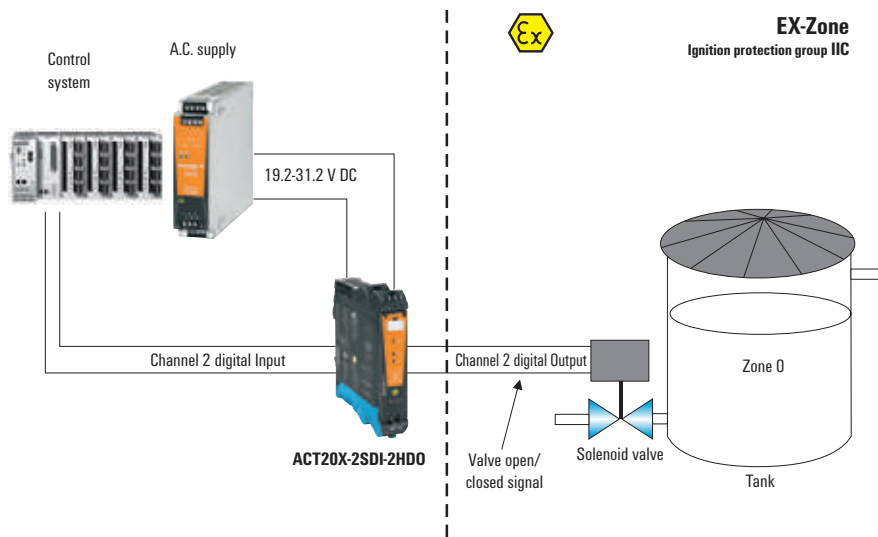

Output data For gas group IIB (≤ 60 mA)


| Connection terminal | Channel 1 | U without load | U with load | I max |
|---------------------|-----------|----------------|-------------|-------|
| 11-12 | | Min. 24 V | Min. 9 V | 60 mA |
| | | | Min. 11.5 V | 50 mA |
| 11-13 | | Min. 24 V | Min. 12.5 V | 60 mA |
| | | | Min. 10 V | 50 mA |
| 11-14 | | Min. 24 V | Min. 11 V | 60 mA |
| | | | Min. 13 V | 50 mA |

Note

Valve control component

- Valve control component for control of intrinsically safe valves, LEDs, acoustic alarms, etc.
- PC configuration with FDT/DTM software, download at www.weidmuller.com
- Output current is limited to 35 mA for ignition group IIC
- 1 or 2 channels in one module
- Relay output for error alarm

ACT20X-SDI-HDO-H-S



Technical data

| Input | |
|---|---|
| Type | NPN, PNP switching signal |
| Input voltage | ≤ 28 V DC |
| Input resistance, voltage | 3.5 kΩ |
| Trigger level low | ≤ 2.0 V DC (NPN), ≤ 8.0 V DC (PNP) |
| Trigger level high | ≥ 4.0 V DC (NPN), ≥ 10V DC (PNP) |
| Alarm output | |
| Type | Relay, 1 NC (voltage-free) |
| Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2) |
| Continuous current | ≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2) |
| Power rating | ≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2) |
| General data | |
| Supply voltage | 19.2 - 31.2 V DC |
| Power consumption | < 2 W |
| Tightening torque, min. / Tightening torque, max. | 0.4 Nm / 0.6 Nm |
| Ambient temperature / Storage temperature | / -20 °C...60 °C / -20 °C...85 °C |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GOSTEX; GOSTME25; IECEXKEM; KEMAATEX |
| Insulation coordination | |
| Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V |
| EMC standards | DIN EN 61326, NE 21 |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |
| Note | |

| Screw connection, Removable terminal block | |
|--|-------------|
| | 2.5/0.5/2.5 |
| | 22.5/117.2 |

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| 1-channel version | | |
| ACT20X-SDI-HDO-H-S | 1 | 8965410000 |

CBX200 USB configuration adapter - 8978580000

Signal converters in 6 mm width

| | | |
|--|---|------|
| Signal converters in 6 mm width | Universal signal converter in 6 mm width - Overview | C.2 |
| | ACT20M - Overview | C.4 |
| | CH20M rail bus | C.26 |
| | MCZ-SERIES - Overview | C.30 |
| | MCZ SERIES - DC/DC passive isolator | C.32 |
| | MCZ-SERIES - PT100 /RTD signal converter | C.33 |
| | MCZ-SERIES - Frequency signal converter | C.34 |
| | MCZ-SERIES - Threshold monitoring | C.35 |


Analogue signal converter in 6 mm width


The thinnest signal converter for isolating, converting and monitoring analogue signals

The signal converters and the signal separators in the product family ACT20M, MICROSERIES and the MCZ enables the user to integrate many signal channels within a compact space. In addition to galvanic separation, these products offer the conversion and conditioning of DC and

temperature signals (TC and RTD) to standard norm signals (e.g. 4...20 mA, 0...10 V). The pluggable cross-connections option for MAS/MAZ and MCZ ranges, or the Weidmüller rail bus option for the ACT20M ensure a quick installation.

C

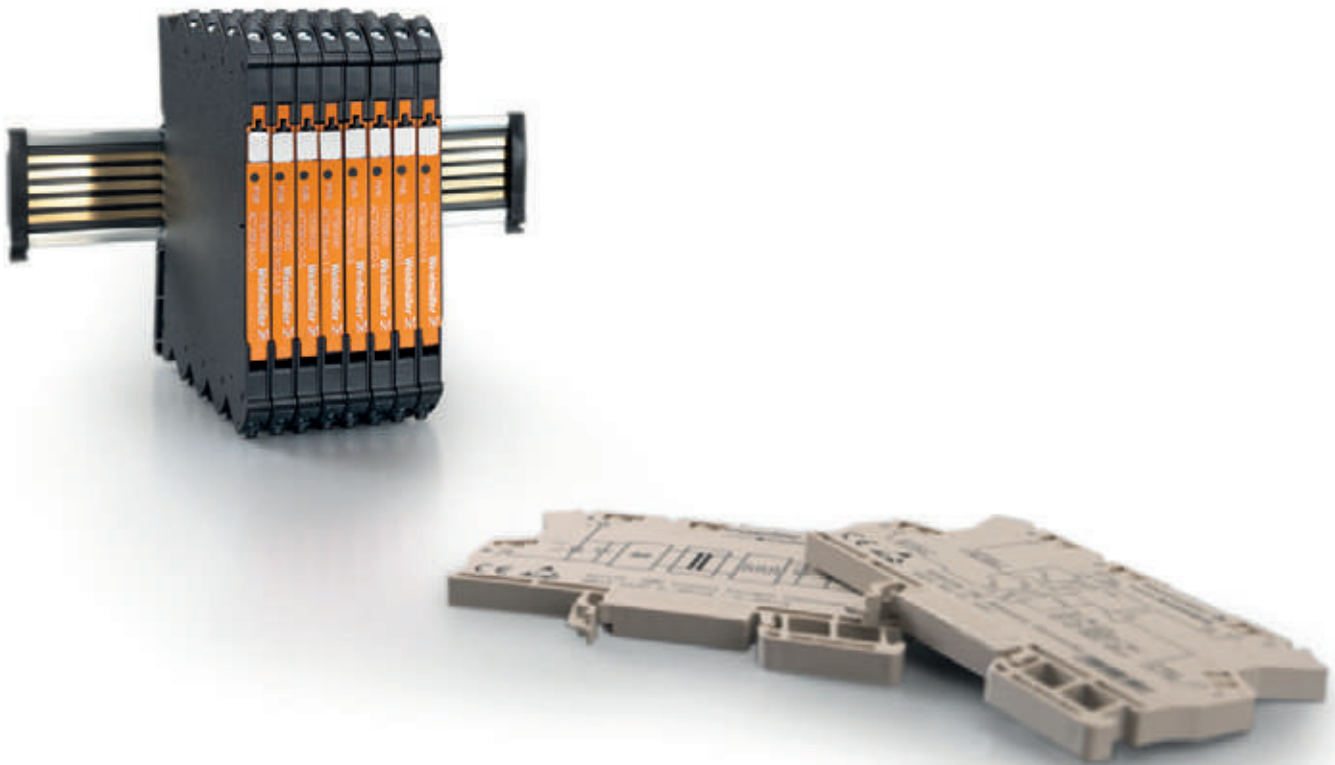

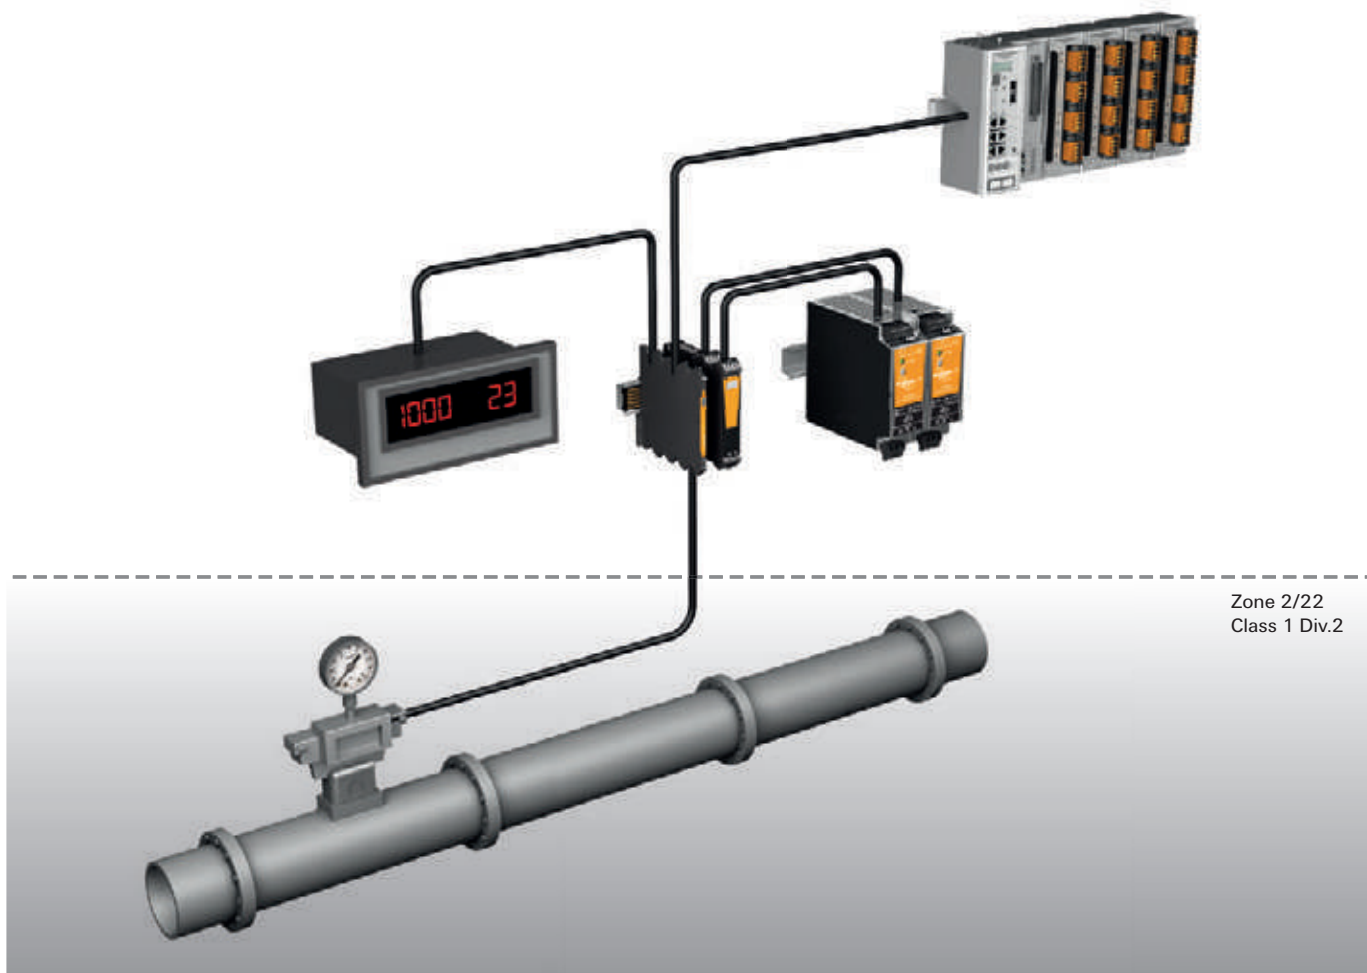

ACT20M



MCZ-SERIES

ACT20M – a narrow 6 mm signal converter

The new dimension for converting and isolating – housed in a 6 mm width

The new ACT20M range combines innovative technologies with the highest levels of functionality in an electronics housing measuring just 6 mm in width. Up to two channels per module result in space savings in the electrical cabinet. The high electrical isolation of 2.5 kV and an accuracy of up to 0.05 % both help to ensure a high degree of process reliability.

The product line consists of Input Loop Powered, Output Loop Powered and Auxiliary Powered analog isolators and converters, including a universal input converter.

The eight-connection housing allows additional functionality such as 2 channel ILP, 2 channel OLP isolation and signal splitting with input powering option. The configuration is carried out via DIP switches or the FDT/ DTM software. The ACT20M modules are supplied via direct wiring or a rail bus.






The DIP switch can be configured simply on the module

In the “ACT20M Tool” software, simply select the type of input and output, and set the DIP switch configuration as displayed.



Easy configuration

DIP switches on the side are used to configure the input and output parameters, as well as the response time.



High level of galvanic isolation

2.5 kV of electrical isolation (300 V rated voltage) ensures excellent process reliability.



Installation is simple and quick

The power supply is simply snapped onto the rail bus for fast and easy installation. The supply can be through any ACT20M module or a separate power-feed unit.



Approvals

Fulfils the strict standards and requirements of the process industry. Can be used worldwide due to international and local approvals ATEX, IECEx, CULUS, FM, GL and DNV.



Signal splitter



Signal converter



Universal measurement and signal converter



Passive isolator



Temperature transducer



CH20M rail bus



Power-feed modules

ACT20M – Selection table

C

| | | Power supply | Function | Current | | | | |
|--------------------------|--------------------------|----------------------|----------------------|--------------------------|--------------------------|---|---|--|
| | | | | 0 ... 20 mA 1-channel | 4 ... 20 mA 1-channel | 2 x 0 ... 20 mA 2-channel / splitter | 2 x 4 ... 20 mA 2-channel / splitter | |
| Input | Current | 0 ... 20 mA | 24 V DC and rail bus | universal | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | |
| | | | U/I | | | ACT20M-AI-2A0-S | ACT20M-AI-2A0-S | |
| | | | Current | | | ACT20M-CI-2CO-S | ACT20M-CI-2CO-S | |
| | | | U/I | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | |
| | | | U/I | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | |
| | | | Current | ACT20M-CI-C0-S | ACT20M-CI-C0-S | | | |
| | | | U/I | | | | | |
| | | | Input Loop Powered | Current | | | | |
| | | | Output Loop Powered | Current | | ACT20M-CI-C0-OLP-S | | |
| | | | Current | | | | | |
| | | Output Loop Powered | Current | | | ACT20M-2CI-2CO-OLP-S | | |
| | | Input Loop Powered | Current | | | | | |
| | | 24 V DC | Current | | | | | |
| | 4 ... 20 mA | 24 V DC and rail bus | universal | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | |
| | | U/I | | | | ACT20M-AI-2A0-S | ACT20M-AI-2A0-S | |
| | | Current | | | | ACT20M-CI-2CO-S | ACT20M-CI-2CO-S | |
| | | U/I | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | | |
| | | U/I | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | Current | ACT20M-CI-C0-S | ACT20M-CI-C0-S | | | | |
| | | U/I | | | | | | |
| | | Output Loop Powered | Current | | ACT20M-CI-C0-OLP-S | | | |
| | | Current | | | | | | |
| | | | | | | | | |
| 1 x 4 ... 20 mA | Output Loop Powered | Current | | ACT20M-CI-C0-OLP-S | | | | |
| | Current | | | | | | | |
| 2 x 4 ... 20 mA | Output Loop Powered | Current | | | | ACT20M-2CI-2CO-OLP-S | | |
| | 24 V DC | Current | | | | | | |
| | Input Loop Powered | Current | | | ACT20M-2CI-2CO-IHP-S | ACT20M-2CI-2CO-IHP-S | | |
| 1 x 4 ... 20 mA | Input Loop Powered | Current | | | | | | |
| | Current | ACT20M-CI-C0-IHP-S | ACT20M-CI-C0-IHP-S | | | | | |
| -10 mA...0...10 mA | 24 V DC and rail bus | bipolar | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| -20 mA...0...20 mA | 24 V DC and rail bus | bipolar | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| with sensor power supply | 24 V DC and rail bus | universal | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | U/I | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| Voltage | 0 ... 5 V 1 ... 5 V | 24 V DC and rail bus | universal | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | |
| | | | U/I | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | |
| | | | U/I | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | |
| | | | U/I | | | | | |
| | | | Output Loop Powered | U/I | | | | |
| | 0 ... 10 V 2 ... 10 V | 24 V DC and rail bus | universal | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | |
| | | | U/I | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | |
| | | | U/I | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | |
| | | | U/I | | | | | |
| | | | Output Loop Powered | U/I | | | | |
| -5 V ... 0 ... 5 V | 24 V DC and rail bus | bipolar | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| | | bipolar | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| -10 V... 0 ... 10 V | 24 V DC and rail bus | bipolar | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| | | bipolar | | | | | | |

Note: *) available from July 2013



| Output | | Voltage | | | | | |
|---|---|------------------------------------|--------------------------------------|---|---|-----------------------------------|--|
| -10 mA ... 0 ... 10 mA 1-channel bipolar | -20 mA ... 0 ... 20 mA 1-channel bipolar | 0 ... 5 V / 1 ... 5 V 1-channel | 0 ... 10 V / 2 ... 10 V 1-channel | 2 x 0 ... 5 V / 2 x 1 ... 5 V 2-channel / splitter | 2 x 0 ... 10 V / 2 x 2 ... 10 V 2-channel / splitter | -10 V ... 0 ... 10 V 1-channel | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | ACT20M-AI-2A0-S | ACT20M-AI-2A0-S | |
| | | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | | |
| | | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | | | | | | |
| | | | | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | ACT20M-AI-2A0-S | ACT20M-AI-2A0-S | |
| | | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | | |
| | | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | | |
| | | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | | | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-AI-A0-E-S | ACT20M-AI-A0-E-S | | | | |
| | | ACT20M-AI-A0-S | ACT20M-AI-A0-S | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |
| | | ACT20M-BAI-A0-S | ACT20M-BAI-A0-S | ACT20M-BAI-2A0-S | ACT20M-BAI-2A0-S | | |

ACT20M – Selection table

C

| | | Power supply | Function | Current | | | | |
|-----------|----------------------|----------------------|----------------------|--------------------------|--------------------------|---|---|--|
| | | | | 0 ... 20 mA 1-channel | 4 ... 20 mA 1-channel | 2 x 0 ... 20 mA 2-channel / splitter | 2 x 4 ... 20 mA 2-channel / splitter | |
| Input | 2-, 3-, 4-conductor | PT100 | Output Loop Powered | | ACT20M-RTCI-CO-OLP-S | | | |
| | | | | Temp. | | ACT20M-RTI-CO-EOLP-S | | |
| | | | 24 V DC | Temp. | ACT20M-RTI-AO-E-S | ACT20M-RTI-AO-E-S | | |
| | | | | Temp. | | | | |
| | | | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | Temp. | | | ACT20M-RTI-AO-S | ACT20M-RTI-AO-S | | | |
| | Temp. | | | | | | | |
| | | PT1000 | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | | Ni100 | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | | Ni1000 | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | TC | B | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | | E | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | | J | Output Loop Powered | Temp. | | ACT20M-RTCI-CO-OLP-S | | |
| | | | 24 V DC | Temp. | ACT20M-TCI-AO-E-S | ACT20M-TCI-AO-E-S | | |
| | | | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | |
| | | | | Temp. | ACT20M-TCI-AO-S | ACT20M-TCI-AO-S | | |
| | | | 24 V DC | Temp. | | | | |
| | | | Temp. | ACT20M-RTI-AO-S | ACT20M-RTI-AO-S | | | |
| | | K | Output Loop Powered | Temp. | | ACT20M-RTCI-CO-OLP-S | | |
| | | | 24 V DC and rail bus | Temp. | ACT20M-TCI-AO-E-S | ACT20M-TCI-AO-E-S | | |
| universal | | | | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | |
| | | | Temp. | | | | | |
| | | | Temp. | ACT20M-TCI-AO-S | ACT20M-TCI-AO-S | | | |
| | | Temp. | ACT20M-RTI-AO-S | ACT20M-RTI-AO-S | | | | |
| L | | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | |
| LR | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| N | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| R | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| S | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| T | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| U | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| W3 | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| W5 | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | | |
| Poti | 10R ...100k | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | |
| R | 10R ...100k | 24 V DC and rail bus | universal | ACT20M-UI-AO-S | ACT20M-UI-AO-S | | | |

Note: *) available from July 2013



| Output | | | | | | | |
|---|---|------------------------------------|--------------------------------------|---|---|----------------------------------|--|
| | | Voltage | | | | | |
| -10 mA ... 0 ... 10 mA 1-channel bipolar | -20 mA ... 0 ... 20 mA 1-channel bipolar | 0 ... 5 V / 1 ... 5 V 1-channel | 0 ... 10 V / 2 ... 10 V 1-channel | 2 x 0 ... 5 V / 2 x 1 ... 5 V 2-channel / splitter | 2 x 0 ... 10 V / 2 x 2 ... 10 V 2-channel / splitter | -10 V... 0 ... 10 V 1-channel | |
| | | | | | | | |
| | | ACT20M-RTI-A0-E-S | ACT20M-RTI-A0-E-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-RTI-A0-S | ACT20M-RTI-A0-S | | | | |
| | | ACT20M-RTCI-A0-S | ACT20M-RTCI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-TCI-A0-E-S | ACT20M-TCI-A0-E-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-TCI-A0-S | ACT20M-TCI-A0-S | | | | |
| | | ACT20M-RTI-A0-S | ACT20M-RTI-A0-S | | | | |
| | | ACT20M-TCI-A0-E-S | ACT20M-TCI-A0-E-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-TCI-A0-S | ACT20M-TCI-A0-S | | | | |
| | | ACT20M-RTI-A0-S | ACT20M-RTI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |
| | | ACT20M-UI-A0-S | ACT20M-UI-A0-S | | | | |

ACT20M

Signal splitter

- Isolation and doubling of DC signals
- Power supply via the mounting rail bus
- 4-way isolation

ACT20M-CI-2CO-S

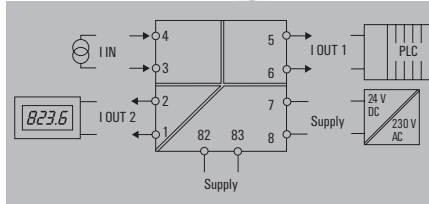

C

Technical data

| | |
|--------------------------------|---|
| Input | |
| Input current | 0...20 mA, 4...20mA |
| Voltage drop, current input | < 1.5 V |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| load impedance current | < 300 Ω, per channel, @ max 23mA |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | -25 °C...70 °C |
| Accuracy | < 0.05 % of measuring range |
| Temperature coefficient | ≤ 0.01 % / °C |
| Cut-off frequency (-3 dB) | 100 Hz |
| Power consumption, typ. | 400 mW |
| Power consumption, max. | 0.8 W |
| Step response time | ≤ 7 ms |
| Insulation coordination | |
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Approvals | CE; cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

Electrical connections

| Terminal | ACT20M-CI-2CO-S | | | |
|----------|-----------------|-----------------|----------------|----------------|
| | Input mA | Power Supply | Output 1 mA | Output 2 mA |
| 1 | | | | □ |
| 2 | | | | ■ |
| 3 | □ | | | |
| 4 | ■ | | | |
| 5 | | | ■ | |
| 6 | | | □ | |
| 7 | | ■ | | |
| 8 | | □ | | |

■ = +
□ = -

| | |
|--|--|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | Power supply optionally over the DIN mounting rail CH20M |

| | |
|--|--|
| Screw connection | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | Power supply optionally over the DIN mounting rail CH20M |

Ordering data

| | | | | |
|--|------------------|-----------------|-------------|------------------|
| | Screw connection | Type | Qty. | Order No. |
| | | ACT20M-CI-2CO-S | 1 | 1175990000 |

| | |
|-------------|--|
| Note | |
|-------------|--|



Accessories

| | |
|-------------|------------------------------------|
| Note | DIN mounting rail, see Accessories |
|-------------|------------------------------------|

Signal splitter

- Isolation, conversion and doubling of DC signals
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 4-way isolation
- Support for adjustment by ACT20M Tool software, download link at www.weidmuller.com

ACT20M-AI-2AO-S

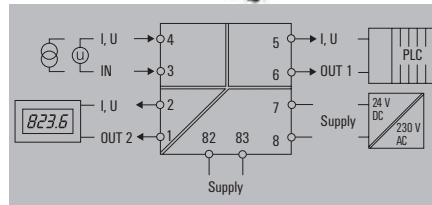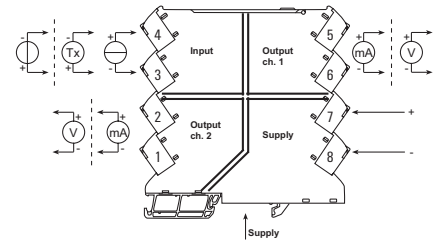

Technical data

| Input | |
|-----------------------------|---------------------|
| Input current | 0...20 mA, 4...20mA |
| Input voltage | 0...10 V, 0...5 V |
| Sensor supply | > 17 V DC at 20 mA |
| Input resistance, voltage | 500 kΩ |
| Voltage drop, current input | < 1.5 V |

| Output | |
|------------------------|----------------------------------|
| Output current | adjustable, 0...20 mA, 4...20 mA |
| Output voltage | adjustable, 0...10 V, 0...5 V |
| load impedance current | < 300 Ω, per channel, @ max 23mA |
| load impedance voltage | ≥ 10 kΩ |

| General data | |
|---------------------------|-----------------------------|
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | -25 °C...70 °C |
| Accuracy | < 0.05 % of measuring range |
| Temperature coefficient | ≤ 0.01 % / °C |
| Cut-off frequency (-3 dB) | 100 Hz |
| Power consumption, typ. | 400 mW |
| Power consumption, max. | 1.2 W |
| Step response time | ≤ 7 ms |

| Insulation coordination | |
|-------------------------|---|
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overtoltage category | II |
| Approvals | CE; cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

| Dimensions | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |

Note
Power supply optionally over the DIN mounting rail CH20M

Ordering data

Screw connection

| Type | Qty. | Order No. |
|-----------------|------|------------|
| ACT20M-AI-2AO-S | 1 | 1176020000 |

Note

Accessories

Note
DIN mounting rail, see Accessories

Electrical connections

| Terminal | ACT20M-AI-2AO-S | | | | | | | | |
|----------|-------------------------------------|-------------------------------------|-------------------------------------|--------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | Input | | | Power supply | Output 1 | | Output 2 | | |
| | V | mA | mA Loop | | V | mA | V | mA | |
| 1 | | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| 2 | | | | | | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | |
| 4 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 5 | | | | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | |
| 6 | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | | |
| 7 | | | | | <input checked="" type="checkbox"/> | | | | |
| 8 | | | | | | | | <input type="checkbox"/> | |

■ = +
□ = -

DIP switch settings

| Range | Input | | | | Output 1 | | | | Output 2 | |
|------------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 0 ... 20 mA | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4 ... 20 mA | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0 ... 10 V | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2 ... 10 V | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0 ... 5 V | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 1 ... 5 V | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0 ... 20 mA loop | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 4 ... 20 mA loop | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | | |




■ = on
□ = off

ACT20M

Signal splitter

- Isolation and conversion of bipolar DC signals
- Splitting into standard signal or bipolar output
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 4-way isolation
- Support for adjustment by ACT20M Tool software, download link at www.weidmueller.com

ACT20M-BAI-2A0-S

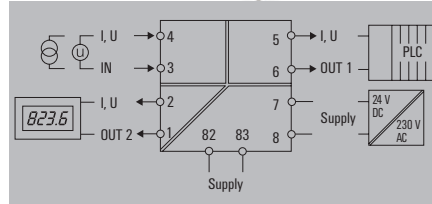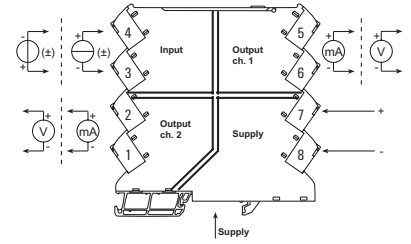

Technical data

| Input | |
|---------------------------|---|
| Input current | -10 mA...0...+10 mA; -20 mA...0...+20 mA |
| Input voltage | -5 V...0...+5 V; -10 V...0...+10 V |
| Output | |
| Output current | adjustable, 0...20 mA, 4...20 mA, ± 10mA, ± 20mA |
| Output voltage | adjustable, 0...10 V, 0...5 V |
| load impedance current | < 300 Ω, per channel |
| load impedance voltage | ≥ 10 kΩ |
| General data | |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | -25 °C...70 °C |
| Storage temperature | -40 °C...85 °C |
| Accuracy | < 0.05 % of measuring range |
| Temperature coefficient | < 0.01% of span/°C (TU) |
| Cut-off frequency (-3 dB) | ≥ 100 Hz, 10 Hz |
| Insulation coordination | |
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overtoltage category | II |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GL; IECEXKEM; KEMAATEX |

| Dimensions | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |

| Screw connection | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|------------------|------|------------|
| ACT20M-BAI-2A0-S | 1 | 1375470000 |

| Note | |
|------|--|
|------|--|

Accessories

| Note | |
|------|--|
|------|--|

| Note | |
|------------------------------------|--|
| DIN mounting rail, see accessories | |

Electrical connections

| Terminal | ACT20M-BAI-2A0-S | | | | | | |
|----------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | Input | | Power supply | Output 1 | | Output 2 | |
| | V | mA | | V | mA | V | mA |
| 1 | | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| 2 | | | | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | |
| 4 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | |
| 5 | | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | |
| 6 | | | | <input type="checkbox"/> | <input type="checkbox"/> | | |
| 7 | | | <input checked="" type="checkbox"/> | | | | |
| 8 | | | <input type="checkbox"/> | | | | |

■ = +
□ = -

DIP switch settings




| Range | Bandwidth | Input | | | | Output 1 | | | | Output 2 | |
|---------------|-----------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 10 Hz | | <input checked="" type="checkbox"/> | | | | | | | | | |
| 100 Hz | | <input type="checkbox"/> | | | | | | | | | |
| -10...+10 mA | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | |
| -20...+20 mA | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| -5...+5 V | | | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | |
| -10...+10 V | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | |
| 0...20 mA | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4...20 mA | | | | | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 0...10 V | | | | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2...10 V | | | | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0...5 V | | | | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 1...5 V | | | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| ±20 mA set-up | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| ±10 mA set-up | | | | | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

■ = on
□ = off

Signal isolator

- Isolation of DC signals
- Power supply via the mounting rail bus
- 3-way isolation

ACT20M-CI-CO-S

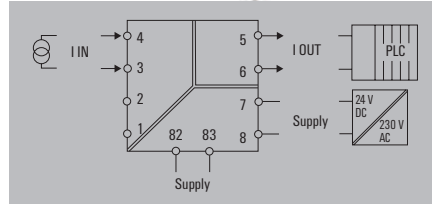

Technical data

| | |
|--------------------------------|---|
| Input | |
| Input current | 0...20 mA, 4...20mA |
| Voltage drop, current input | < 1.5 V |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| load impedance current | ≤ 600 Ω, @ max 23mA |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | -25 °C...70 °C |
| Accuracy | < 0.05 % of measuring range |
| Temperature coefficient | ≤ 0.01 % / °C |
| Cut-off frequency (-3 dB) | 100 Hz |
| Power consumption, typ. | 400 mW |
| Power consumption, max. | 0.8 |
| Step response time | ≤ 7 ms |
| Insulation coordination | |
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Approvals | CE; cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

Electrical connections

| Terminal | ACT20M-CI-CO-S | | |
|----------|----------------|-----------------|----------------|
| | Input mA | Power Supply | Output 1 mA |
| 1 | | | |
| 2 | | | |
| 3 | □ | | |
| 4 | ■ | | |
| 5 | | | ■ |
| 6 | | | □ |
| 7 | | ■ | |
| 8 | | □ | |

■ = +
□ = -

| | |
|--|---------------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |
| Power supply optionally over the DIN mounting rail CH20M | |

| | | |
|--|---------------------|--|
| Screw connection | | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 | |
| Depth x width x height | 114.3 / 6.1 / 112.5 | |
| Note | | |
| Power supply optionally over the DIN mounting rail CH20M | | |

Ordering data

| | |
|----------------|------------------------------|
| | Screw connection |
| Type | Qty. Order No. |
| ACT20M-CI-CO-S | 1 1175980000 |

| |
|-------------|
| Note |
|-------------|

Accessories




| | |
|-------------|------------------------------------|
| Note | DIN mounting rail, see Accessories |
|-------------|------------------------------------|

ACT20M

Signal converter

- Isolation and conversion of DC signals
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 3-way isolation
- Support for adjustment by ACT20M Tool software, download link at www.weidmueller.com

ACT20M-AI-A0-S

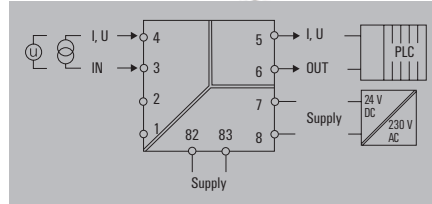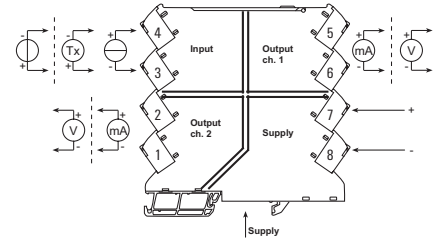

Technical data

| | | |
|--------------------------------|-----------------------------|---|
| Input | Input current | 0...20 mA, 4...20mA |
| | Input voltage | 0...10 V, 0...5 V |
| | Sensor supply | > 17 V DC at 20 mA |
| | Input resistance, voltage | >500 kΩ |
| | Voltage drop, current input | <1,5 V |
| Output | Output current | adjustable, 0...20 mA, 4...20 mA |
| | Output voltage | adjustable, 0...10 V, 0...5 V |
| | load impedance current | ≤ 600 Ω, @ max 23mA |
| | load impedance voltage | ≥ 10 kΩ |
| General data | Configuration | DIP switch |
| | Supply voltage | 24 V DC ± 30 % |
| | Ambient temperature | -25 °C...70 °C |
| | Accuracy | < 0.05 % of measuring range |
| | Temperature coefficient | ≤ 0.01 % / °C |
| | Cut-off frequency (-3 dB) | 100 Hz |
| | Power consumption, typ. | 400 mW |
| | Power consumption, max. | 1.2 W |
| | Step response time | ≤ 7 ms |
| Insulation coordination | Insulation voltage | 2.5 kV _{eff} / 1 min. |
| | Rated voltage | 300 V _{eff} |
| | EMC standards | IEC 61326-1, NE 21 |
| | Pollution degree | 2 |
| | Overvoltage category | II |
| | Approvals | CE; cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

Electrical connections

| Terminal | ACT20M-AI-A0-S | | | | | |
|----------|----------------|----|---------|--------------|----------|----|
| | Input | | | Power supply | Output 1 | |
| | V | mA | mA Loop | | V | mA |
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | ■ | □ | ■ | | | |
| 4 | □ | ■ | □ | | | |
| 5 | | | | | ■ | ■ |
| 6 | | | | | □ | □ |
| 7 | | | | ■ | | |
| 8 | | | | □ | | |

■ = +
□ = -

DIP switch settings

| Range | Input | | | | Output | | | | | |
|------------------|-------|---|---|---|--------|---|---|---|---|----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 0 ... 20 mA | □ | □ | □ | □ | □ | □ | □ | □ | □ | □ |
| 4 ... 20 mA | □ | ■ | □ | □ | □ | ■ | □ | □ | □ | □ |
| 0 ... 10 V | ■ | □ | □ | ■ | □ | □ | □ | □ | □ | □ |
| 2 ... 10 V | ■ | ■ | □ | □ | ■ | ■ | □ | □ | □ | □ |
| 0 ... 5 V | ■ | □ | ■ | ■ | □ | □ | ■ | ■ | ■ | ■ |
| 1 ... 5 V | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 0 ... 20 mA loop | ■ | □ | □ | □ | | | | | | |
| 4 ... 20 mA loop | ■ | □ | ■ | □ | | | | | | |

■ = on
□ = off

| | | |
|-------------------|--|--|
| Dimensions | Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| | Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | | Power supply optionally over the DIN mounting rail CH20M |

| | | |
|-------------------------|--|--|
| Screw connection | | |
| | | |
| | | |

Ordering data

| | |
|--|------------------|
| | Screw connection |
|--|------------------|

| Type | Qty. | Order No. |
|----------------|------|------------|
| ACT20M-AI-A0-S | 1 | 1176000000 |

| | |
|-------------|--|
| Note | |
|-------------|--|



Accessories

| | |
|-------------|------------------------------------|
| Note | DIN mounting rail, see Accessories |
|-------------|------------------------------------|

Signal converter

- Isolation and conversion of DC signals
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 3-way isolation
- Support for adjustment by ACT20M Tool software, download link at www.weidmueller.com

ACT20M-AI-AO-E-S

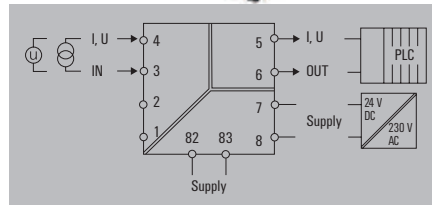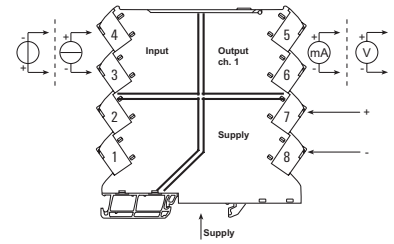

Technical data

| Input | |
|-----------------------------|---|
| Input current | 0...20 mA, 4...20mA |
| Input voltage | 0...10 V, 0...5 V |
| Input resistance, voltage | >500 kΩ |
| Voltage drop, current input | <1,5 V |
| Output | |
| Output current | adjustable, 0...20 mA, 4...20 mA |
| Output voltage | adjustable, 0...10 V, 0...5 V |
| load impedance current | ≤ 600 Ω, @ max 23mA |
| load impedance voltage | ≥ 10 kΩ |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | 0 °C...70 °C |
| Accuracy | < 0.2 % of measuring range |
| Temperature coefficient | ≤ 0.015 % / °C |
| Cut-off frequency (-3 dB) | 100 Hz |
| Power consumption, typ. | 400 mW |
| Power consumption, max. | 1.2 W |
| Step response time | ≤ 7 ms |
| Insulation coordination | |
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Approvals | CE; cULus; DETNORVER; EAC; GL; GOSTME25 |

Electrical connections

| Terminal | ACT20M-AI-AO-E-S | | | | |
|----------|------------------|----|--------------|----------|----|
| | Input | | Power supply | Output 1 | |
| | V | mA | | V | mA |
| 1 | | | | | |
| 2 | | | | | |
| 3 | ■ | □ | | | |
| 4 | □ | ■ | | | |
| 5 | | | | ■ | ■ |
| 6 | | | | □ | □ |
| 7 | | | ■ | | |
| 8 | | | □ | | |

■ = +
□ = -

DIP switch settings

| Range | Input | | | | Output | | | | | |
|-------------|-------|---|---|---|--------|---|---|---|---|----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 0 ... 20 mA | □ | □ | □ | □ | □ | □ | □ | □ | □ | □ |
| 4 ... 20 mA | □ | ■ | □ | □ | ■ | □ | □ | □ | □ | □ |
| 0 ... 10 V | ■ | □ | □ | □ | ■ | □ | □ | □ | □ | □ |
| 2 ... 10 V | ■ | ■ | □ | □ | ■ | ■ | □ | □ | □ | □ |
| 0 ... 5 V | ■ | □ | ■ | ■ | □ | ■ | ■ | □ | ■ | ■ |
| 1 ... 5 V | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

■ = on
□ = off

| Dimensions | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |
| Power supply optionally over the DIN mounting rail CH20M | |

| Screw connection | | |
|--|---------------------|--|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 | |
| Depth x width x height | 114.3 / 6.1 / 112.5 | |
| Note | | |
| Power supply optionally over the DIN mounting rail CH20M | | |

Ordering data

| Type | Qty. | Order No. |
|------------------|------|------------|
| ACT20M-AI-AO-E-S | 1 | 1176010000 |

| Note | |
|------|--|
| | |

Accessories



| Note | |
|------------------------------------|--|
| DIN mounting rail, see Accessories | |

ACT20M

Signal converter

- Isolation and conversion of bipolar DC signals into standard signals
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 3-way isolation
- Support for adjustment by ACT20M Tool software, download link at www.weidmueller.com

ACT20M-BAI-AO-S

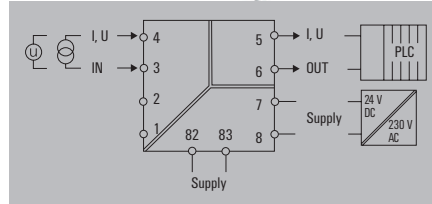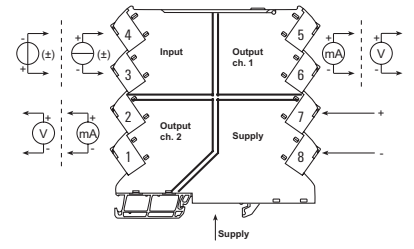

C

Technical data

| Input | |
|---------------------------|---|
| Input current | -10 mA...0...+10 mA, -20 mA...0...+20 mA |
| Input voltage | -5 V...0...+5 V, -10 V...0...+10 V |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| Output voltage | adjustable, 0...10 V, 0...5 V |
| load impedance current | ≤ 600 Ω |
| load impedance voltage | ≥ 10 kΩ |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 30 % |
| Ambient temperature | -25 °C...70 °C |
| Storage temperature | -40 °C...85 °C |
| Accuracy | < 0.05 % of measuring range |
| Temperature coefficient | < 0.01 % of span/°C (TU) |
| Cut-off frequency (-3 dB) | ≥ 100 Hz, 10 Hz |
| Insulation coordination | |
| Insulation voltage | 2.5 kV _{eff} / 1 min. |
| Rated voltage | 300 V _{eff} |
| EMC standards | IEC 61326-1, NE 21 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GL; IECEXKEM; KEMAATEX |

| Dimensions | |
|---|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |
| Power supply optionally via mounting rail bus CH20M | |

Ordering data

| Type | Qty. | Order No. |
|-----------------|------|------------|
| ACT20M-BAI-AO-S | 1 | 1375450000 |

| Note |
|------|
| |

Accessories

| Note |
|------------------------------------|
| Mounting rail bus, see accessories |

Electrical connections

| Terminal | ACT20M-BAI-AO-S | | | | |
|----------|-----------------|----|--------------|----------|----|
| | Input | | Power supply | Output 1 | |
| | V | mA | | V | mA |
| 1 | | | | | |
| 2 | | | | | |
| 3 | ■ | □ | | | |
| 4 | □ | ■ | | | |
| 5 | | | | ■ | ■ |
| 6 | | | | □ | □ |
| 7 | | | ■ | | |
| 8 | | | □ | | |

■ = +
□ = -

DIP switch settings



| Range | Bandwidth | Input | | | | Output | | | | | | |
|---------------|-----------|-------|---|---|---|--------|---|---|---|---|----|--|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 10 Hz | ■ | | | | | | | | | | | |
| 100 Hz | □ | | | | | | | | | | | |
| -10...+10 mA | | ■ | ■ | ■ | | | | | | | | |
| -20...+20 mA | | ■ | ■ | □ | | | | | | | | |
| -5...+5 V | | □ | □ | ■ | | | | | | | | |
| -10...+10 V | | □ | □ | □ | | | | | | | | |
| 0...20 mA | | | | | □ | □ | □ | | | | | |
| 4...20 mA | | | | | □ | ■ | □ | | | | | |
| 0...10 V | | | | | ■ | □ | □ | | | | | |
| 2...10 V | | | | | ■ | ■ | □ | | | | | |
| 0...5 V | | | | | ■ | □ | ■ | | | | | |
| 1...5 V | | | | | ■ | ■ | ■ | | | | | |
| ±20 mA set-up | | | | | | | | | | | | |
| ±10 mA set-up | | | | | | | | | | | | |

■ = on
□ = off

Universal measurement and signal converter

- Isolation and conversion of temperature signals and DC signals
- Configuration using FDT/DTM software
- Power supply via the mounting rail bus
- 3-way isolation

ACT20M-UI-AO-S

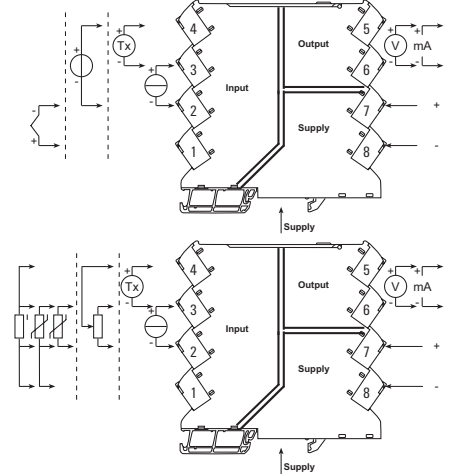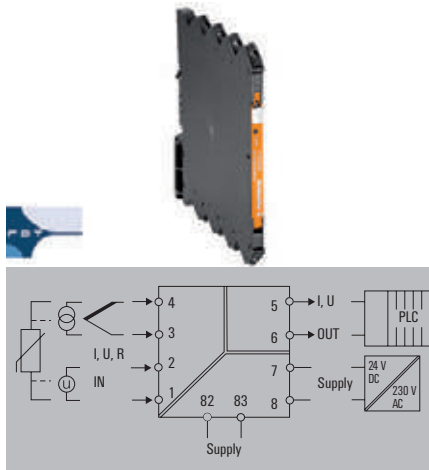

Technical data

| Input | |
|-----------------------------|--|
| Sensor | |
| Potentiometer | |
| Resistance | |
| Input current | |
| Input voltage | |
| Input resistance, voltage | |
| Voltage drop, current input | |
| Sensor supply | |

| |
|--|
| Thermocouples: B, E, J, K, L, LR, N, R, N, R, S, T, U, W3, W5, RTD: PT100, PT1000, Ni100, Ni1000, 2-/3-/4-wire |
| 10 Ω...10 kΩ |
| 10 Ω...10 kΩ |
| 0...20 mA, 4...20mA |
| 0...10 V, 0...5 V |
| > 10 MΩ |
| < 3 V |
| > 15 V DC at 20 mA |

| Output | |
|------------------------|--|
| Output current | |
| Output voltage | |
| load impedance current | |
| load impedance voltage | |

| |
|----------------------------------|
| adjustable, 0...20 mA, 4...20 mA |
| adjustable, 0...10 V, 0...5 V |
| ≤ 600 Ω, @ max 28mA |
| ≥ 10 kΩ |

| General data | |
|-------------------------|--|
| Configuration | |
| Supply voltage | |
| Ambient temperature | |
| Accuracy | |
| Temperature coefficient | |
| Power consumption, typ. | |
| Power consumption, max. | |
| Step response time | |

| |
|-------------------------------------|
| With FDT/DTM software |
| 24 V DC ± 30 % |
| -25 °C...70 °C |
| < 0.1 % of measuring range |
| ≤ 0.01 % / °C |
| 400 mW |
| 1.2 W |
| 400 ms (10...90%) @ U/I, 1 s @ temp |

| Insulation coordination | |
|-------------------------|--|
| Insulation voltage | |
| Rated voltage | |
| EMC standards | |
| Pollution degree | |
| Overvoltage category | |
| Approvals | |

| |
|---|
| 2.5 kV _{eff} / 1 min. |
| 300 V _{eff} |
| IEC 61326-1, NE 21 |
| 2 |
| II |
| cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

| Dimensions | |
|--|--|
| Clamping range (nominal / min. / max.) | |
| Depth x width x height | |

| Screw connection | |
|---------------------|--|
| 2.5 / 0.5 / 2.5 | |
| 114.3 / 6.1 / 112.5 | |

Note

Power supply optionally over the DIN mounting rail CH20M

Ordering data

| |
|------------------|
| Screw connection |
|------------------|

| Type | Qty. | Order No. |
|----------------|------|------------|
| ACT20M-UI-AO-S | 1 | 1176030000 |

Note

Accessories

| |
|-------------|
| Note |
|-------------|

| |
|---|
| CBX200 USB configuration adapter - 8978580000 DIN mounting rail, see Accessories |
|---|

Electrical connections

| Terminal | ACT20M-UI-AO-S | | | | | | | |
|----------|-------------------------------------|-------------------------------------|---------|---------------|--------------|----|--------|-------------------------------------|
| | Input | | | | Power supply | | Output | |
| | V | mA | mA Loop | RTD | POT | TC | V | mA |
| 1 | | | | Sense- Sense- | | | | |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | | R | R- | R- | R | <input type="checkbox"/> |
| 3 | | <input checked="" type="checkbox"/> | | R | R+ | R+ | R | |
| 4 | <input checked="" type="checkbox"/> | | | Sense+ R | | | | |
| 5 | | | | | | | | <input checked="" type="checkbox"/> |
| 6 | | | | | | | | <input type="checkbox"/> |
| 7 | | | | | | | | <input checked="" type="checkbox"/> |
| 8 | | | | | | | | <input type="checkbox"/> |




= +
 = -

ACT20M

Passive isolator

- Isolation of DC signals without additional voltage supply
- Supply from the input measuring circuit
- Optionally available as a 1-channel / 2-channel version
- 2-way isolation

ACT20M-CI-CO-ILP-S

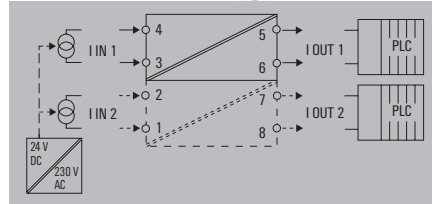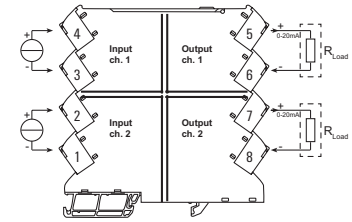

Technical data

Input

Voltage drop, current input
Input current

Output

Output current
load impedance current

General data

Configuration
Ambient temperature
Accuracy
Temperature coefficient
Cut-off frequency (-3 dB)
Power consumption, max.
Supply voltage
Step response time

Insulation coordination

Insulation voltage
Rated voltage
EMC standards
Pollution degree
Overvoltage category
Approvals

Input

1.25 V + 0.015 V_{out} @25°C
0...20 mA, 4...20mA

Output

0...20 mA, 4...20 mA
≤ 600 Ω, @ max 23mA

General data

Configuration: none
Ambient temperature: -25 °C...70 °C
Accuracy: < 0.1 % of measuring range
Temperature coefficient: ≤ 0.01 % / °C
Cut-off frequency (-3 dB): 100 Hz
Power consumption, max.: 30 mW per channel
Supply voltage: Loop powered, via 4...20 mA input
Step response time: ≤ 5 ms

Insulation coordination

Insulation voltage: 2.5 kV_{eff}
Rated voltage: 300 V_{eff}
EMC standards: IEC 61326-1, NE 21
Pollution degree: 2
Overvoltage category: II
Approvals: cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECExKEM; KEMAATEX

Electrical connections

| Terminal | ACT20M-CI-2CO-S | | | |
|----------|-----------------|----------|---------|----------|
| | Input 1 | Output 1 | Input 2 | Output 2 |
| | mA | mA | mA | mA |
| 1 | | | □ | |
| 2 | | | ■ | |
| 3 | □ | | | |
| 4 | ■ | | | |
| 5 | | ■ | | |
| 6 | | □ | | |
| 7 | | | | ■ |
| 8 | | | | □ |

Electrical connections

| Terminal | ACT20M-CI-CO-ILP-S | |
|----------|--------------------|----------|
| | Input 1 | Output 1 |
| | mA | mA |
| 1 | | |
| 2 | | |
| 3 | □ | |
| 4 | ■ | |
| 5 | | ■ |
| 6 | | □ |
| 7 | | |
| 8 | | |

■ = +
□ = -

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5
114.3 / 6.1 / 112.5

Power supply optionally over the DIN mounting rail CH20M

Ordering data

1-channel version
2-channel version

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20M-CI-CO-ILP-S | 1 | 1176070000 |
| ACT20M-2CI-2CO-ILP-S | 1 | 1176080000 |

Note

Accessories




Note

DIN mounting rail, see Accessories

Passive isolator

- Isolation of DC signals without additional voltage supply
- Supply from the output measurement circuit
- Optionally available as a 1-channel / 2-channel version
- 2-way isolation

ACT20M-CI-CO-OLP-S

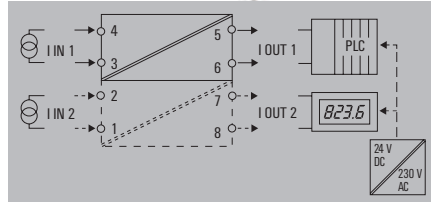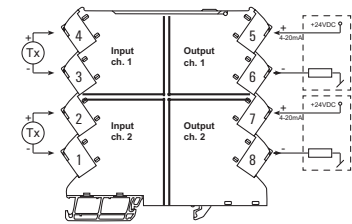

Technical data

| | |
|--------------------------------|---|
| Input | Voltage drop, current input Input current |
| Output | Output current |
| General data | Configuration Ambient temperature Accuracy Temperature coefficient |
| | Cut-off frequency (-3 dB) Power consumption, max. Supply voltage Step response time |
| Insulation coordination | Insulation voltage Rated voltage EMC standards Pollution degree Overvoltage category Approvals |

| |
|--|
| Typical 2.5 V |
| 4...20 mA |
| 4...20 mA |
| none |
| -25 °C...70 °C |
| < 0.05 % of measuring range |
| ≤ ± 0.07 µA x (Δ °C x V _{supply}) @ Tamb < 25 °C |
| ≤ ± 0.02 µA x (Δ °C x V _{supply}) @ Tamb > 25 °C |
| 100 Hz |
| 30 mW per channel |
| Output loop powered |
| ≤ 5 ms |
| 2.5 kV _{eff} / 1 min. |
| 300 V _{eff} |
| IEC 61326-1, NE 21 |
| 2 |
| II |
| cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECExKEM; KEMAATEX |

Electrical connections

| Terminal | ACT20M-2CI-2CO-OLP-S | | | |
|----------|----------------------|----------|---------|----------|
| | Input 1 | Output 1 | Input 2 | Output 2 |
| | mA | mA | mA | mA |
| 1 | | | □ | |
| 2 | | | ■ | |
| 3 | □ | | | |
| 4 | ■ | | | |
| 5 | | ■ | | |
| 6 | | □ | | |
| 7 | | | | ■ |
| 8 | | | | □ |

Electrical connections

| Terminal | ACT20M-CI-CO-OLP-S | |
|----------|--------------------|----------|
| | Input 1 | Output 1 |
| | mA | mA |
| 1 | | |
| 2 | | |
| 3 | □ | |
| 4 | ■ | |
| 5 | | ■ |
| 6 | | □ |
| 7 | | |
| 8 | | |

■ = +
□ = -

| | |
|-------------------|--|
| Dimensions | Clamping range (nominal / min. / max.) Depth x width x height |
| Note | |

| | |
|-------------------------|--|
| Screw connection | 2.5 / 0.5 / 2.5 114.3 / 6.1 / 112.5 |
| Note | Power supply optionally over the DIN mounting rail CH20M |

Ordering data

| | |
|--|-------------------|
| | 1-channel version |
| | 2-channel version |

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20M-CI-CO-OLP-S | 1 | 1176040000 |
| ACT20M-2CI-2CO-OLP-S | 1 | 1176050000 |

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories




| | |
|-------------|------------------------------------|
| Note | DIN mounting rail, see Accessories |
|-------------|------------------------------------|

ACT20M

Temperature transducer

- Isolation and conversion of temperature signals, (RTD and thermocouple)
- Configuration via DIP switches
- Power supply via the output circuit
- 2-way isolation

ACT20M-RTCI-CO-OLP-S

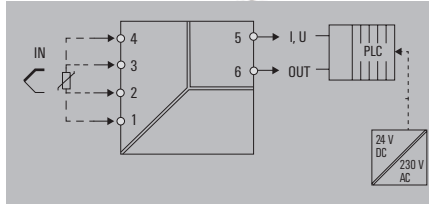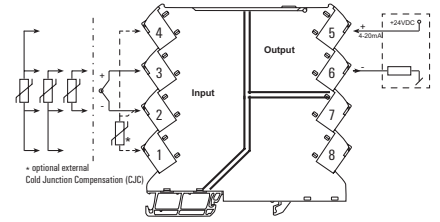

Technical data

Input

Sensor
 Input measurement range
 Temperature input range

Output

Output current
 Sensor error detection

General data

Configuration
 Supply voltage
 Power consumption
 Storage temperature
 Accuracy

Galvanic isolation
 Step response time
 Ambient temperature

Insulation coordination

Insulation voltage
 Rated voltage
 EMC standards
 Pollution degree
 Overvoltage category

Approvals

Approvals

Input

PT100 / 2-/3-/4-wire, Thermocouple acc. to IEC 584, type: J, Thermocouple acc. to IEC 584, type: K
 PT100 -200...+850 °C, Thermocouple type J -100...+1200°C, Thermocouple type K -200...+1370°C
 Configurable, min. measurement range 10°C (RTD), min. measurement range 50°C (TC)

Output

adjustable, 4...20 mA, 20...4 mA
 3.5 mA / 23 mA / none

General data

DIP switch
 Output loop powered, 6...35 V
 ca. 1 W
 -40 °C...85 °C
 absolute accuracy: < ±0.05 % of the measurement range, RTD (PT100) Basic accuracy: < ±0.1 °C of the measurement range, TC (J,K) Basic accuracy: < ±0.5 °C of the measurement range

2-way isolator
 ≤ 30 ms, < 300 ms
 -25 °C...+70 °C

Insulation coordination

Insulation voltage
 Rated voltage
 EMC standards
 Pollution degree
 Overvoltage category

Approvals

cULus; DETNORVER; EAC; FMEX; GL; IECExKEM; KEMAATEX

Dimensions

Clamping range (nominal / min. / max.)
 Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5
 114.3 / 6.1 / 112.5

Ordering data

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20M-RTCI-CO-OLP-S | 1 | 1435590000 |

Note

Accessories

Note

Note

DIN mounting rail, see accessories

Electrical connections

| Terminal | ACT20M-RTCI-CO-OLP-S | | | | |
|----------|----------------------|--------|--------|---------|----------|
| | Input | | | | Output 1 |
| | 2 wire | 3 wire | 4 wire | TC | mA |
| 1 | | Sense- | Sense- | CJC+* | |
| 2 | R | R- | R- | TC/CJC* | |
| 3 | R | R+ | R+ | TC+ | |
| 4 | | | Sense+ | CJC* | |
| 5 | | | | | ■ |
| 6 | | | | | □ |
| 7 | | | | | |
| 8 | | | | | |

* optional
 ■ = +
 □ = -

Configuration



| Temp. | Temperature range [°C] | | | | | | | | | | | | | | |
|-------|------------------------|----|------|----|------|-----------------------|------|----|------|------|-----------------------|----|------|----|--|
| | Pt100: -200...+850 °C | | | | | TC J: -100...+1200 °C | | | | | TC K: -180...+1372 °C | | | | |
| | Min. | S2 | Max. | S2 | Max. | S2 | Min. | S2 | Max. | S2 | Min. | S2 | Max. | S2 | |
| -200 | | | | | | | | | | | | | | | |
| -180 | | | 5 | | | | | | | 170 | | | | | |
| -150 | | | 10 | | | | | | | 180 | | | | | |
| -100 | | | 15 | | | | | | | 200 | | | | | |
| -50 | | | 20 | | | | | | | 225 | | | | | |
| -25 | | | 25 | | | | | | | 250 | | | | | |
| -10 | | | 30 | | | | | | | 275 | | | | | |
| -5 | | | 35 | | | | | | | 300 | | | | | |
| 0 | | | 40 | | | | | | | 325 | | | | | |
| 5 | | | 45 | | | | | | | 350 | | | | | |
| 10 | | | 50 | | | | | | | 375 | | | | | |
| 20 | | | 55 | | | | | | | 400 | | | | | |
| 25 | | | 60 | | | | | | | 450 | | | | | |
| 50 | | | 65 | | | | | | | 500 | | | | | |
| 100 | | | 70 | | | | | | | 550 | | | | | |
| 200 | | | 75 | | | | | | | 600 | | | | | |
| | | | 80 | | | | | | | 650 | | | | | |
| | | | 85 | | | | | | | 700 | | | | | |
| | | | 90 | | | | | | | 750 | | | | | |
| | | | 95 | | | | | | | 800 | | | | | |
| | | | 100 | | | | | | | 850 | | | | | |
| | | | 105 | | | | | | | 900 | | | | | |
| | | | 110 | | | | | | | 950 | | | | | |
| | | | 115 | | | | | | | 1000 | | | | | |
| | | | 120 | | | | | | | 1050 | | | | | |
| | | | 125 | | | | | | | 1100 | | | | | |
| | | | 130 | | | | | | | 1150 | | | | | |
| | | | 135 | | | | | | | 1200 | | | | | |
| | | | 140 | | | | | | | 1250 | | | | | |
| | | | 145 | | | | | | | 1300 | | | | | |
| | | | 150 | | | | | | | 1350 | | | | | |
| | | | 160 | | | | | | | 1372 | | | | | |

■ = On

Temperature transducer

- Conversion of temperature signals, RTD
- Configuration via DIP switches
- Power supply via the output circuit

ACT20M-RTI-CO-EOLP-S

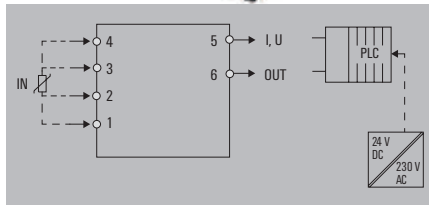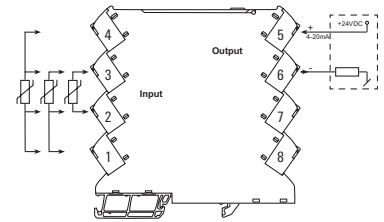

Technical data

| Input | |
|-------------------------|--|
| Sensor | PT100 / 2-/3-/4-wire |
| Input measurement range | PT100 -200...+850 °C |
| Temperature input range | Configurable, min. measurement range 10°C (RTD) |
| Output | |
| Output current | adjustable, 4...20 mA, 20...4 mA |
| Sensor error detection | 3.5 mA / 23 mA / none |
| General data | |
| Configuration | DIP switch |
| Supply voltage | Output loop powered, 6...35 V |
| Power consumption | ca. 1 W |
| Storage temperature | -40 °C...85 °C |
| Accuracy | absolute accuracy: $\lt; \pm 0.1\%$ of the measurement range, Basic accuracy: $\lt; \pm 0.2\text{ }^\circ\text{C}$ |
| Galvanic isolation | Without isolation |
| Step response time | $\leq 30\text{ ms}, < 300\text{ ms}</math>$ |
| Ambient temperature | -25 °C...+70 °C |
| EMC standards | IEC 61326-1, NE 21 |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GL; IECExKEM; KEMAATEX |

| Screw connection | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |
| | |

| Dimensions | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |
| | |

Ordering data

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20M-RTI-CO-EOLP-S | 1 | 1435610000 |
| Note | | |
| | | |

Accessories

| Note |
|------------------------------------|
| DIN mounting rail, see accessories |

Electrical connections

| Terminal | ACT20M-RTCI-CO-OPLS | | | Output 1 mA |
|----------|---------------------|--------|--------|----------------|
| | Input | | | |
| | RTD | | | |
| | 2 wire | 3 wire | 4 wire | |
| 1 | | Sense- | Sense- | |
| 2 | R | R- | R- | |
| 3 | R | R+ | R+ | |
| 4 | | Sense+ | | |
| 5 | | | | ■ |
| 6 | | | | □ |
| 7 | | | | |
| 8 | | | | |

* optional
 ■ = +
 □ = -

Configuration

| Temp. | Temperature range [°C] | | | | | | | | | |
|-------|--|----|------|----|------|-----------------------|------|----|------|----|
| | Pt100: -200...+850 °C // TC J: -100...+1200 °C | | | | | TC K: -180...+1372 °C | | | | |
| | Min. | S2 | Max. | S2 | Max. | S2 | Min. | S2 | Max. | S2 |
| -200 | | | 0 | | | | | | 170 | ■ |
| -180 | | ■ | 5 | | | | | ■ | 180 | ■ |
| -150 | | ■ | 10 | | | | | ■ | 190 | ■ |
| -100 | | ■ | 15 | | | | | ■ | 200 | ■ |
| -50 | | ■ | 20 | | | | | ■ | 225 | ■ |
| -25 | | ■ | 25 | | | | | ■ | 250 | ■ |
| -10 | | ■ | 30 | | | | | ■ | 275 | ■ |
| -5 | | ■ | 35 | | | | | ■ | 300 | ■ |
| 0 | | ■ | 40 | | | | | ■ | 325 | ■ |
| 5 | | ■ | 45 | | | | | ■ | 350 | ■ |
| 10 | | ■ | 50 | | | | | ■ | 375 | ■ |
| 20 | | ■ | 55 | | | | | ■ | 400 | ■ |
| 25 | | ■ | 60 | | | | | ■ | 450 | ■ |
| 50 | | ■ | 65 | | | | | ■ | 500 | ■ |
| 100 | | ■ | 70 | | | | | ■ | 550 | ■ |
| 200 | | ■ | 75 | | | | | ■ | 600 | ■ |
| | | | 80 | | | | | ■ | 650 | ■ |
| | | | 85 | | | | | ■ | 700 | ■ |
| | | | 90 | | | | | ■ | 750 | ■ |
| | | | 95 | | | | | ■ | 800 | ■ |
| | | | 100 | | | | | ■ | 850 | ■ |
| | | | 105 | | | | | ■ | 900 | ■ |
| | | | 110 | | | | | ■ | 950 | ■ |
| | | | 115 | | | | | ■ | 1000 | ■ |
| | | | 120 | | | | | ■ | 1050 | ■ |
| | | | 125 | | | | | ■ | 1100 | ■ |
| | | | 130 | | | | | ■ | 1150 | ■ |
| | | | 135 | | | | | ■ | 1200 | ■ |
| | | | 140 | | | | | ■ | 1250 | ■ |
| | | | 145 | | | | | ■ | 1300 | ■ |
| | | | 150 | | | | | ■ | 1350 | ■ |
| | | | 160 | | | | | ■ | 1372 | ■ |




■ = On

ACT20M

Temperature transducer

- Isolation and conversion of temperature signals, RTD (PT100)
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 3-way isolation

ACT20M-RTI-A0-S

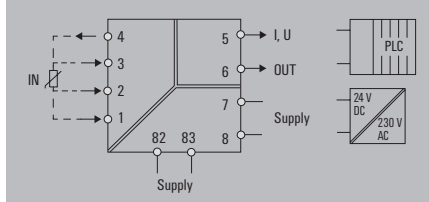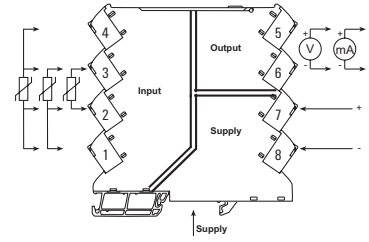

Technical data

| |
|--------------------------------|
| Input |
| Sensor |
| Input measurement range |
| Temperature input range |
| Output |
| Output current |
| Output voltage |
| load impedance current |
| load impedance voltage |
| Sensor error detection |
| General data |
| Configuration |
| Supply voltage |
| Power consumption |
| Accuracy |
| Galvanic isolation |
| Temperature coefficient |
| Step response time |
| Ambient temperature |
| Insulation coordination |
| Insulation voltage |
| Rated voltage |
| EMC standards |
| Pollution degree |
| Overvoltage category |
| Approvals |
| Approvals |

| |
|--|
| PT100 / 2-/3-/4-wire |
| PT100 -200...+850 °C |
| Configurable, min. measurement range 10°C (RTD) |
| adjustable, 0...20 mA, 4...20 mA |
| adjustable, 0...5 V, 0...10 V |
| ≤ 600 Ω |
| ≥ 10 kΩ |
| 3.5 mA / 23 mA / none |
| DIP switch |
| 24 V DC ± 30 % |
| 0.7 W |
| absolute accuracy: < ±0.05 % of the measurement range, Basic accuracy: < ±0.1 °C |
| 3-way isolator |
| ≤0.01 % of the measurement range/°C or 0.02 °C/°C |
| ≤ 30 ms, < 300 ms |
| -25 °C...+70 °C |
| 2.5 kV _{eff} / 1 min. |
| 300 V _{eff} |
| IEC 61326-1, NE 21 |
| 2 |
| II |
| cULus; DETNORVER; EAC; FMEX; GL; IECEXKEM; KEMAATEX |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 2.5 / 0.5 / 2.5 |
| 114.3 / 6.1 / 112.5 |

Ordering data

| | | |
|-----------------|-------------|------------------|
| Type | Qty. | Order No. |
| ACT20M-RTI-A0-S | 1 | 1375510000 |

| | | |
|-----------------|-------------|------------------|
| Type | Qty. | Order No. |
| ACT20M-RTI-A0-S | 1 | 1375510000 |

Accessories

| |
|-------------|
| Note |
|-------------|

| |
|------------------------------------|
| DIN mounting rail, see accessories |
|------------------------------------|

Electrical connections

| Terminal | ACT20M-RTI-A0-S | | | | | |
|----------|-----------------|--------|--------|--------------|----------|----|
| | Input | | | Power supply | Output 1 | |
| | RTD | | | | V | mA |
| | 2 wire | 3 wire | 4 wire | | | |
| 1 | | Sense- | Sense- | | | |
| 2 | R | R- | R- | | | |
| 3 | R | R+ | R+ | | | |
| 4 | | Sense+ | | | | |
| 5 | | | | | ■ | ■ |
| 6 | | | | | □ | □ |
| 7 | | | | ■ | | |
| 8 | | | | | □ | |

■ = +
□ = -

Configuration



| Temp. | Temperature range [°C] | | | | | | | | | | | | | | | | | | | |
|-------|------------------------|----|---|---|-------|-----------------------|----|---|---|---|------|-------|---|---|---|---|---|----|------|---|
| | Pt100: -200...+850 °C | | | | | Pt100: -200...+850 °C | | | | | | | | | | | | | | |
| | Min. | S2 | | | | Max. | S2 | | | | Max. | | | | | | | | | |
| Temp. | 1 | 2 | 3 | 4 | Temp. | 5 | 6 | 7 | 8 | 9 | 10 | Temp. | 5 | 6 | 7 | 8 | 9 | 10 | | |
| -200 | | | | | | | | | | | | | | | | | | | 170 | ■ |
| -180 | | | | | ■ | 5 | | | | | | | | | | | | | 180 | ■ |
| -150 | | | | | ■ | 10 | | | | | | | | | | | | | 190 | ■ |
| -100 | | | | | ■ | 15 | | | | | | | | | | | | | 200 | ■ |
| -50 | | | | | ■ | 20 | | | | | | | | | | | | | 225 | ■ |
| -25 | | | | | ■ | 25 | | | | | | | | | | | | | 250 | ■ |
| -10 | | | | | ■ | 30 | | | | | | | | | | | | | 275 | ■ |
| -5 | | | | | ■ | 35 | | | | | | | | | | | | | 300 | ■ |
| 0 | | | | | ■ | 40 | | | | | | | | | | | | | 325 | ■ |
| 5 | | | | | ■ | 45 | | | | | | | | | | | | | 350 | ■ |
| 10 | | | | | ■ | 50 | | | | | | | | | | | | | 375 | ■ |
| 20 | | | | | ■ | 55 | | | | | | | | | | | | | 400 | ■ |
| 25 | | | | | ■ | 60 | | | | | | | | | | | | | 450 | ■ |
| 50 | | | | | ■ | 65 | | | | | | | | | | | | | 500 | ■ |
| 100 | | | | | ■ | 70 | | | | | | | | | | | | | 550 | ■ |
| 200 | | | | | ■ | 75 | | | | | | | | | | | | | 600 | ■ |
| | | | | | | 80 | | | | | | | | | | | | | 650 | ■ |
| | | | | | | 85 | | | | | | | | | | | | | 700 | ■ |
| | | | | | | 90 | | | | | | | | | | | | | 750 | ■ |
| | | | | | | 95 | | | | | | | | | | | | | 800 | ■ |
| | | | | | | 100 | | | | | | | | | | | | | 850 | ■ |
| | | | | | | 105 | | | | | | | | | | | | | 900 | ■ |
| | | | | | | 110 | | | | | | | | | | | | | 950 | ■ |
| | | | | | | 115 | | | | | | | | | | | | | 1000 | ■ |
| | | | | | | 120 | | | | | | | | | | | | | 1050 | ■ |
| | | | | | | 125 | | | | | | | | | | | | | 1100 | ■ |
| | | | | | | 130 | | | | | | | | | | | | | 1150 | ■ |
| | | | | | | 135 | | | | | | | | | | | | | 1200 | ■ |
| | | | | | | 140 | | | | | | | | | | | | | 1250 | ■ |
| | | | | | | 145 | | | | | | | | | | | | | 1300 | ■ |
| | | | | | | 150 | | | | | | | | | | | | | 1350 | ■ |
| | | | | | | 160 | | | | | | | | | | | | | 1372 | ■ |

■ = On

Temperature transducer

- Conversion of temperature signals, RTD (PT100)
- Configuration via DIP switches

ACT-20M-RTI-A0-E-S

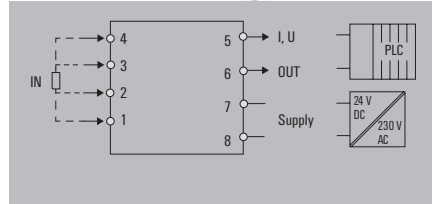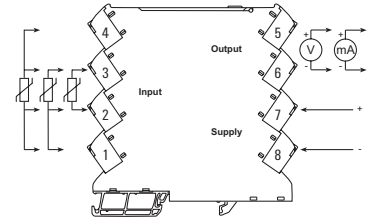

Technical data

| Input | |
|-------------------------|--|
| Sensor | PT100 / 2-/3-/4-wire |
| Input measurement range | PT100 -200...+850 °C |
| Temperature input range | Configurable, min. measurement range 10°C (RTD) |
| Output | |
| Output current | adjustable, 0...20 mA, 4...20 mA |
| Output voltage | adjustable, 0...5 V, 0...10 V |
| load impedance current | ≤ 600 Ω |
| load impedance voltage | ≥ 10 kΩ |
| Sensor error detection | 3.5 mA / 23 mA / none |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 30 % |
| Power consumption | 0.7 W |
| Accuracy | absolute accuracy: < ±0.1 % of the measurement range |
| Galvanic isolation | Without isolation |
| Temperature coefficient | ≤ 0.01 % of the measurement range/°C or 0.02 °C/°C |
| Step response time | ≤ 30 ms, < 300 ms |
| Ambient temperature | -25 °C...+70 °C |
| EMC standards | IEC 61326-1, NE 21 |
| Approvals | |
| Approvals | cULus; DETNORVER; EAC; FMEX; GL; IECEKKEM; KEMAATEX |

| Electrical connections | | | |
|------------------------|-------------------|--------|--------------|
| Terminal | ACT20M-RTI-A0-E-S | | |
| | Input RTD | | Power supply |
| | 2 wire | 3 wire | 4 wire |
| 1 | | Sense- | Sense- |
| 2 | R | R- | R- |
| 3 | R | R+ | R+ |
| 4 | | Sense+ | |
| 5 | | | ■ |
| 6 | | | □ |
| 7 | | | ■ |
| 8 | | | □ |
| | | | ■ = + |
| | | | □ = - |

| Dimensions | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |

| Screw connection | |
|--|---------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 114.3 / 6.1 / 112.5 |
| Note | |

| Ordering data | |
|---------------|-------------------|
| Type | ACT20M-RTI-A0-E-S |
| Qty. | 1 |
| Order No. | 1375520000 |
| Note | |

| Type | Qty. | Order No. |
|-------------------|------|------------|
| ACT20M-RTI-A0-E-S | 1 | 1375520000 |

| Accessories | |
|-------------|------------------------------------|
| Note | DIN mounting rail, see accessories |

DIN mounting rail, see accessories

Electrical connections

| Terminal | ACT20M-RTI-A0-E-S | | |
|----------|-------------------|--------|--------------|
| | Input RTD | | Power supply |
| | 2 wire | 3 wire | 4 wire |
| 1 | | Sense- | Sense- |
| 2 | R | R- | R- |
| 3 | R | R+ | R+ |
| 4 | | Sense+ | |
| 5 | | | ■ |
| 6 | | | □ |
| 7 | | | ■ |
| 8 | | | □ |
| | | | ■ = + |
| | | | □ = - |

Configuration

| Temperature range [°C] | | | | | | | | | | | | | | | | | | |
|------------------------|----|---|---|-----|-------|----|---|---|---|------|----|-------|---|---|---|---|---|----|
| Pt100: -200...+850 °C | | | | | | | | | | | | | | | | | | |
| Min. | S2 | | | | Max. | S2 | | | | Max. | S2 | | | | | | | |
| Temp. | 1 | 2 | 3 | 4 | Temp. | 5 | 6 | 7 | 8 | 9 | 10 | Temp. | 5 | 6 | 7 | 8 | 9 | 10 |
| -200 | | | | 0 | | | | | | | | 170 | ■ | | | | | |
| -180 | | | | 5 | | | | | | | | 180 | ■ | | | | | ■ |
| -150 | | | | 10 | | | | | | | | 190 | ■ | | | | | ■ |
| -100 | | | | 15 | | | | | | | | 200 | ■ | | | | | ■ |
| -50 | | | | 20 | | | | | | | | 225 | ■ | | | | | ■ |
| -25 | | | | 25 | | | | | | | | 250 | ■ | | | | | ■ |
| -10 | | | | 30 | | | | | | | | 275 | ■ | | | | | ■ |
| -5 | | | | 35 | | | | | | | | 300 | ■ | | | | | ■ |
| 0 | | | | 40 | | | | | | | | 325 | ■ | | | | | ■ |
| 5 | | | | 45 | | | | | | | | 350 | ■ | | | | | ■ |
| 10 | | | | 50 | | | | | | | | 375 | ■ | | | | | ■ |
| 20 | | | | 55 | | | | | | | | 400 | ■ | | | | | ■ |
| 25 | | | | 60 | | | | | | | | 450 | ■ | | | | | ■ |
| 50 | | | | 65 | | | | | | | | 500 | ■ | | | | | ■ |
| 100 | | | | 70 | | | | | | | | 550 | ■ | | | | | ■ |
| 200 | | | | 75 | | | | | | | | 600 | ■ | | | | | ■ |
| | | | | 80 | | | | | | | | 650 | ■ | | | | | ■ |
| | | | | 85 | | | | | | | | 700 | ■ | | | | | ■ |
| | | | | 90 | | | | | | | | 750 | ■ | | | | | ■ |
| | | | | 95 | | | | | | | | 800 | ■ | | | | | ■ |
| | | | | 100 | | | | | | | | 850 | ■ | | | | | ■ |
| | | | | 105 | | | | | | | | 900 | ■ | | | | | ■ |
| | | | | 110 | | | | | | | | 950 | ■ | | | | | ■ |
| | | | | 115 | | | | | | | | 1000 | ■ | | | | | ■ |
| | | | | 120 | | | | | | | | 1050 | ■ | | | | | ■ |
| | | | | 125 | | | | | | | | 1100 | ■ | | | | | ■ |
| | | | | 130 | | | | | | | | 1150 | ■ | | | | | ■ |
| | | | | 135 | | | | | | | | 1200 | ■ | | | | | ■ |
| | | | | 140 | | | | | | | | 1250 | ■ | | | | | ■ |
| | | | | 145 | | | | | | | | 1300 | ■ | | | | | ■ |
| | | | | 150 | | | | | | | | 1350 | ■ | | | | | ■ |
| | | | | 160 | | | | | | | | 1372 | ■ | | | | | ■ |



■ = On

ACT20M

Temperature transducer

- Isolation and conversion of temperature signals, (thermocouple)
- Configuration via DIP switches
- Power supply via the mounting rail bus
- 3-way isolation

ACT20M-TCI-A0-S

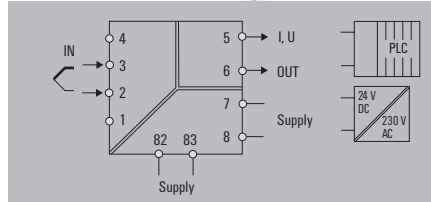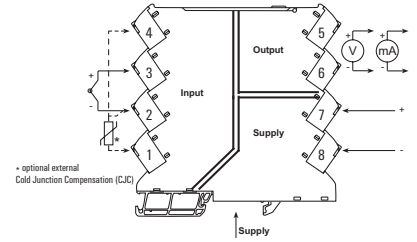

Technical data

Input

Sensor
Input measurement range

Temperature input range

Output

Output current
Output voltage
load impedance current
load impedance voltage
Sensor error detection

General data

Configuration
Supply voltage
Power consumption
Accuracy

Galvanic isolation
Temperature coefficient
Step response time
Ambient temperature

Insulation coordination

Insulation voltage
Rated voltage
EMC standards
Pollution degree
Overvoltage category

Approvals

Approvals

Thermocouple (type J, K)

Thermocouple type J -100...+1200°C, Thermocouple type K -200...+1370°C

Configurable, min. measurement range 50°C (TC)

adjustable, 0...20 mA, 4...20 mA

adjustable, 0...5 V, 0...10 V

≤ 600 Ω

≥ 10 kΩ

3.5 mA / 23 mA / none

DIP switch

24 V DC ± 30 %

0.7 W

absolute accuracy: < ±0.05 % of the measurement range, Basic accuracy: < ±0.5°

3-way isolator

0,1 °C/°C, or, ≤0,01% des Messbereichs/°C

≤ 30 ms, < 300 ms, Configurable

-25 °C...+70 °C

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5
114.3 / 6.1 / 112.5

Ordering data

| Type | Qty. | Order No. |
|-----------------|------|------------|
| ACT20M-TCI-A0-S | 1 | 1375480000 |

Note

Accessories

Note

DIN mounting rail, see accessories

Electrical connections

| Terminal | ACT20M-TCI-A0-S | | |
|----------|-------------------------|--------------|---------------|
| | Input TC | Power supply | Output 1 V mA |
| 1 | CJC+ ^{1,2)} | | |
| 2 | TC-/CJC ^{1,2)} | | |
| 3 | TC+ | | |
| 4 | CJC ^{1,2)} | | |
| 5 | | ■ | ■ |
| 6 | | □ | □ |
| 7 | | ■ | |
| 8 | | □ | |

1) only 2) optional

■ = +
□ = -

Configuration




| Temp. | Temperature range [°C] | | | | | | | | | |
|-------|------------------------|------|----|------|----|-----------------------|----|------|----|------|
| | TC J: -100...+1200 °C | | | | | TC K: -180...+1372 °C | | | | |
| Min. | S2 | Max. | S2 | Max. | S2 | Max. | S2 | Max. | S2 | Max. |
| -200 | | 0 | | | | 170 | ■ | | | |
| -180 | | 5 | | | | 180 | ■ | | | ■ |
| -150 | ■ | 10 | | | | 190 | ■ | | | ■ |
| -100 | ■ | 15 | | | ■ | 200 | ■ | | ■ | ■ |
| -50 | ■ | 20 | | | ■ | 225 | ■ | | ■ | ■ |
| -25 | ■ | 25 | | | ■ | 250 | ■ | | ■ | ■ |
| -10 | ■ | 30 | | | ■ | 275 | ■ | | ■ | ■ |
| -5 | ■ | 35 | | | ■ | 300 | ■ | | ■ | ■ |
| 0 | ■ | 40 | | | ■ | 325 | ■ | | ■ | ■ |
| 5 | ■ | 45 | | | ■ | 350 | ■ | | ■ | ■ |
| 10 | ■ | 50 | | | ■ | 375 | ■ | | ■ | ■ |
| 20 | ■ | 55 | | | ■ | 400 | ■ | | ■ | ■ |
| 25 | ■ | 60 | | | ■ | 450 | ■ | | ■ | ■ |
| 50 | ■ | 65 | | | ■ | 500 | ■ | | ■ | ■ |
| 100 | ■ | 70 | | | ■ | 550 | ■ | | ■ | ■ |
| 200 | ■ | 75 | | | ■ | 600 | ■ | | ■ | ■ |
| | | 80 | | | ■ | 650 | ■ | | ■ | ■ |
| | | 85 | | | ■ | 700 | ■ | | ■ | ■ |
| | | 90 | | | ■ | 750 | ■ | | ■ | ■ |
| | | 95 | | | ■ | 800 | ■ | | ■ | ■ |
| | | 100 | | | ■ | 850 | ■ | | ■ | ■ |
| | | 105 | | | ■ | 900 | ■ | | ■ | ■ |
| | | 110 | | | ■ | 950 | ■ | | ■ | ■ |
| | | 115 | | | ■ | 1000 | ■ | | ■ | ■ |
| | | 120 | | | ■ | 1050 | ■ | | ■ | ■ |
| | | 125 | | | ■ | 1100 | ■ | | ■ | ■ |
| | | 130 | | | ■ | 1150 | ■ | | ■ | ■ |
| | | 135 | | | ■ | 1200 | ■ | | ■ | ■ |
| | | 140 | | | ■ | 1250 | ■ | | ■ | ■ |
| | | 145 | | | ■ | 1300 | ■ | | ■ | ■ |
| | | 150 | | | ■ | 1350 | ■ | | ■ | ■ |
| | | 160 | | | ■ | 1372 | ■ | | ■ | ■ |

■ = On

Temperature transducer

- Conversion of temperature signals, (thermocouple)
- Configuration via DIP switches

ACT-20M-TCI-A0-E-S

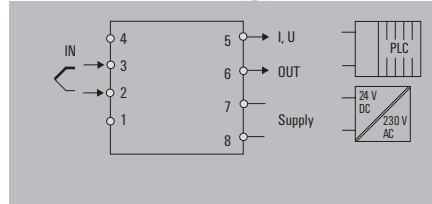

Technical data

Input

Sensor
Input measurement range

Temperature input range

Output

Output current
Output voltage
load impedance current
load impedance voltage
Sensor error detection

General data

Configuration
Supply voltage
Power consumption
Accuracy

Galvanic isolation
Temperature coefficient
Step response time
Ambient temperature
EMC standards

Approvals

Approvals

Thermocouple (type J, K)

Thermocouple type J -100...+1200°C, Thermocouple type K -200...+1370°C

Configurable, min. measurement range 50°C (TC)

adjustable, 0...20 mA, 4...20 mA

adjustable, 0...5 V, 0...10 V

≤ 600 Ω

≥ 10 kΩ

3.5 mA / 23 mA / none

DIP switch

24 V DC ± 30 %

0.7 W

absolute accuracy: < ±0.1 % of the measurement range, Basic accuracy: < ±1 °C

Without isolation

0,1 °C/°C, or, ≤0,01% des Messbereichs/°C

≤ 30 ms, < 300 ms, Configurable

-25 °C...+70 °C

IEC 61326-1, NE 21

cULus; DETNORVER; EAC; FMEX; GL; IECEXKEM; KEMAATEX

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5
114.3 / 6.1 / 112.5

Ordering data

| Type | Qty. | Order No. |
|-------------------|------|------------|
| ACT20M-TCI-A0-E-S | 1 | 1375500000 |

Note

Accessories

DIN mounting rail, see accessories

Electrical connections

| Terminal | ACT20M-TCI-A0-E-S | | |
|----------|--------------------------|--------------|---------------|
| | Input TC | Power supply | Output 1 V mA |
| 1 | CJC+ ^{1,2)} | | |
| 2 | TC-/CJC- ^{1,2)} | | |
| 3 | TC+ | | |
| 4 | CJC- ^{1,2)} | | |
| 5 | | | ■ |
| 6 | | | □ |
| 7 | | ■ | |
| 8 | | □ | |

1) only 2) optional

■ = +

□ = -

Configuration


| Temp. | Temperature range [°C] | | | | | | | | | |
|-------|------------------------|------|----|------|----|-----------------------|----|------|----|--|
| | TC J: -100...+1200 °C | | | | | TC K: -180...+1372 °C | | | | |
| Min. | S2 | Max. | S2 | Max. | S2 | Max. | S2 | Max. | S2 | |
| -200 | | 0 | | | | 170 | ■ | | | |
| -180 | ■ | 5 | | | | 180 | ■ | | ■ | |
| -150 | ■ | 10 | | | ■ | 190 | ■ | | ■ | |
| -100 | ■ | 15 | | | ■ | 200 | ■ | | ■ | |
| -50 | ■ | 20 | | | ■ | 225 | ■ | | ■ | |
| -25 | ■ | 25 | | | ■ | 250 | ■ | | ■ | |
| -10 | ■ | 30 | | | ■ | 275 | ■ | | ■ | |
| -5 | ■ | 35 | | | ■ | 300 | ■ | | ■ | |
| 0 | ■ | 40 | | | ■ | 325 | ■ | | ■ | |
| 5 | ■ | 45 | | | ■ | 350 | ■ | | ■ | |
| 10 | ■ | 50 | | | ■ | 375 | ■ | | ■ | |
| 20 | ■ | 55 | | | ■ | 400 | ■ | | ■ | |
| 25 | ■ | 60 | | | ■ | 450 | ■ | | ■ | |
| 50 | ■ | 65 | | | ■ | 500 | ■ | | ■ | |
| 100 | ■ | 70 | | | ■ | 550 | ■ | | ■ | |
| 200 | ■ | 75 | | | ■ | 600 | ■ | | ■ | |
| | | 80 | | | ■ | 650 | ■ | | ■ | |
| | | 85 | | | ■ | 700 | ■ | | ■ | |
| | | 90 | | | ■ | 750 | ■ | | ■ | |
| | | 95 | | | ■ | 800 | ■ | | ■ | |
| | | 100 | | | ■ | 850 | ■ | | ■ | |
| | | 105 | | | ■ | 900 | ■ | | ■ | |
| | | 110 | | | ■ | 950 | ■ | | ■ | |
| | | 115 | | | ■ | 1000 | ■ | | ■ | |
| | | 120 | | | ■ | 1050 | ■ | | ■ | |
| | | 125 | | | ■ | 1100 | ■ | | ■ | |
| | | 130 | | | ■ | 1150 | ■ | | ■ | |
| | | 135 | | | ■ | 1200 | ■ | | ■ | |
| | | 140 | | | ■ | 1250 | ■ | | ■ | |
| | | 145 | | | ■ | 1300 | ■ | | ■ | |
| | | 150 | | | ■ | 1350 | ■ | | ■ | |
| | | 160 | | | ■ | 1372 | ■ | | ■ | |

■ = On

CH20M rail bus

Quick and safe power supply through the DIN rail.


This customer-friendly infrastructure solution brings power, signals and data to the rail in a quick and reliable manner. The rail bus can replace the tedious individual wiring process with a flexible and uninterrupted system solution. As a result, the customer saves time and cost-especially if any module changes are needed later, as other adjacent modules are not disturbed. The uninterrupted system bus is securely integrated within the 35 mm standard mounting rail. Whether 7.5 mm or 15 mm high, the custom-fit rail profiles are easy to install on all TS 35 standard rails in accordance with DIN EN 60715.

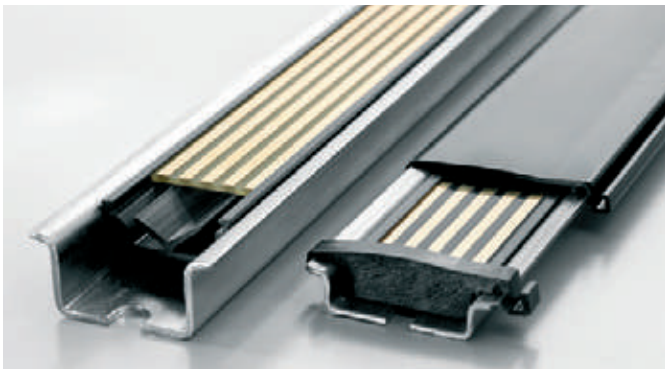

The resistant gold-plated contacts ensure a permanent and reliable contact. The ACT20M modules are simply snapped onto the mounting rail and are automatically in contact with the DIN rail bus.

The supply of 24 V DC to the power rail can be from any one of the auxiliary powered ACT20M modules, when that module is itself externally supplied. This allows the rail to power up to 8 other modules (approximately 400 mA). For powering additional ACT20Ms, a separate Feed-In module can be used.

The ACT20-Feed-In-Basic provides a simple and compact (6 mm width) power supply interface to the rail, for supplying up to 2.5 A (up to 50 x ACT20M modules).

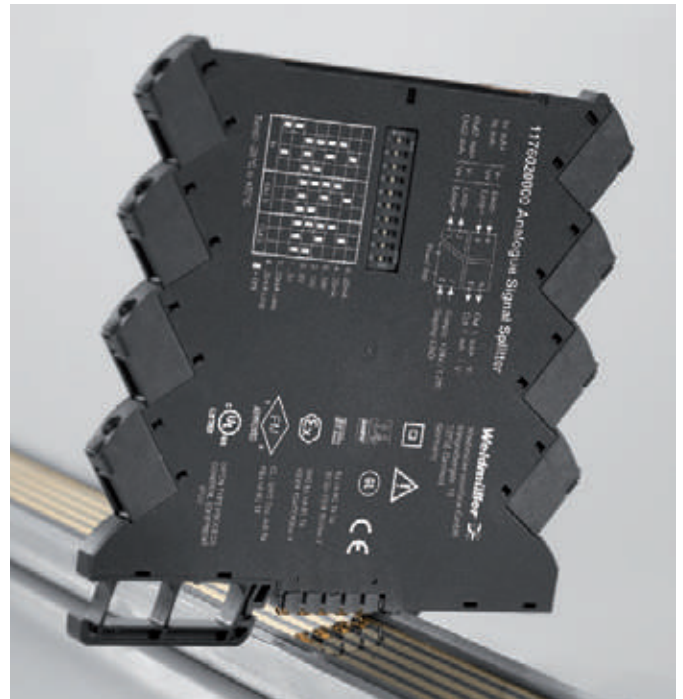

The ACT20-Feed-In-Pro is a more powerful 22.5 mm wide solution. This takes 2 external 24 V DC inputs, and via internal diodes provides a redundant supply to the rail, and an alarm output in the case of input failure.

Rail bus accessories

CH20M BUS-PROFIL TS35x7.5/1000

Support section for bus circuit board



- Support section for TS 35 x 7.5
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x7.5/250 | 10 | 1248150000 |
| CH20M BUS-PROFIL TS35x7.5/500 | 10 | 1248160000 |
| CH20M BUS-PROFIL TS35x7.5/750 | 5 | 1248170000 |

CH20M BUS-PROFIL TS35x15/1000

Support section for bus circuit board



- Support section for TS 35 x 15
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x15/250 | 5 | 1248180000 |
| CH20M BUS-PROFIL TS35x15/500 | 5 | 1248190000 |
| CH20M BUS-PROFIL TS35x15/750 | 5 | 1248210000 |

CH20M BUS 4.50/05 AU/1000

Bus PCB



- Bus circuit board for use on TS 35 x 7.5 and TS 35 x 15
- Length: 250, 500 or 750 mm
- Five conductor paths, gold-plated
- Electrical rating: 63 V AC, 5 A/conductor path

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| CH20M BUS 4.50/05 AU/250 | 10 | 1248220000 |
| CH20M BUS 4.50/05 AU/500 | 10 | 1248230000 |
| CH20M BUS 4.50/05 AU/750 | 5 | 1248240000 |

CH20M BUS-ADP TS35/1000

Cover plate



- Cover plate for DIN rail bus
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------|------|------------|
| CH20M BUS-ADP TS35/250 | 10 | 1248250000 |
| CH20M BUS-ADP TS35/500 | 10 | 1248260000 |
| CH20M BUS-ADP TS35/750 | 5 | 1248270000 |

CH20M BUS-AP LI TS35x7.5 & 15

End plate



- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- left

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP LI TS35x7.5 & 15 | 50 | 1193160000 |

CH20M BUS-AP RE TS35x7.5 & 15

End plate




- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- right

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP RE TS35x7.5 & 15 | 50 | 1193170000 |

SET CH20M BUS 250MM TS 35X15

Set

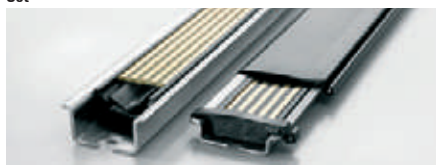


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X15/250

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X15 | 1 | 1335150000 |

SET CH20M BUS 250MM TS 35X7.5

Set

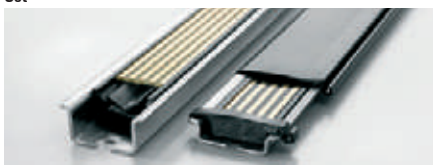


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X7.5/250

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X7.5 | 1 | 1335140000 |

TS 35x7.5 / TS 35x15

DIN rail

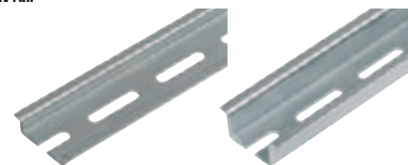

- DIN rail with slot
- Passivated galvanised steel


Ordering data

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| TS 35x7.5/LL 1M/ST/ZN | 10 | 0514510000 |
| TS 35x15/LL 1M/ST/ZN | 10 | 0236510000 |

Power-feed module for the CH20M DIN rail bus

4 A supply with backup supply and error analysis

The power-feed unit ACT20-FEED-IN-PRO-S supplies the devices on the CH20M DIN rail bus with 24 V DC. At the same time, the FEED-IN device reads the group error contact – optionally provided by the installed devices – from the CH20M rail bus and sends a message through the status relay to the external controller. Optionally, two power supplies can be connected as a primary and back-up, to create a redundant 24 V DC source. An installation in Zone 2 / Division 2 is also possible. Three LEDs show the status of the power supply and the error status.

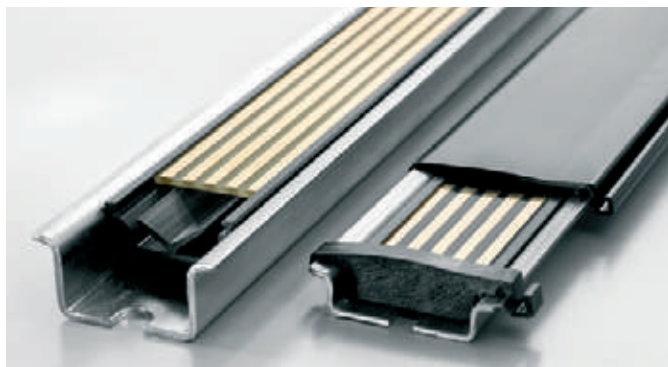

The FEED-IN-PRO can supply a maximum of 4 A to feed up to 120 devices mounted on a CH20M rail bus. Quick identification of errors on the DIN rail bus is through the internal status relay. The FEED-IN-PRO device immediately recognises and displays when a power supply has failed. The supply is then switched automatically to the redundant power supply.




Weidmüller offers a compact and narrow 6 mm feed-in module as an alternative. This feeds the 24 V DC from its field terminals directly to the DIN rail bus. Up to 80 modules can be fed with a maximum available current of 2.5 A.


ACT20 power-feed module

- Distributes the supply onto the busbar
- Compatible with Weidmüller CH20 DIN rail bus
- Optional connection for backup supply
- Approved for use in Ex-Zone 2 / Div. 2
- Monitoring of the supply voltage
- Alarm alerts via the status relay

ACT20-Feed-In-PRO-S

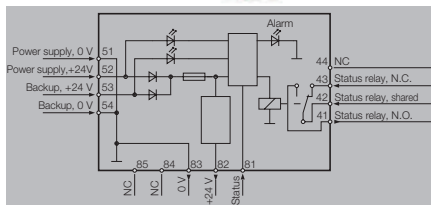

ACT20-Feed-In-BASIC-S

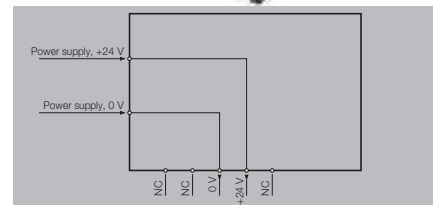

Technical data

| | |
|---|--|
| Input | |
| Supply voltage | 21.6...26.4 V DC |
| Input current | Max. 4 A |
| Trigger level for the power supply | 21.6...26.4 V DC |
| Output, power supply | |
| Output voltage | Input voltage -0.5 V DC / 4 A |
| Output power | 96 W |
| Output current | Max. 4 A |
| Output, status relay in safe zone | |
| Max. switching voltage, AC / Max. switching voltage, DC | 250 V / 30 V |
| Continuous current | 2 A AC / DC |
| AC power, max. | 500 VA / 60 W |
| General data | |
| Degree of efficiency | 0,976 |
| Ambient temperature | -20 °C...+60 °C |
| Power consumption | < 2 W |
| Protection degree | IP 20 |
| Weight | 140 |
| Humidity | 95 %, no condensation |
| EMC standards | IEC 61326-1, NE 21 |
| Approvals | cULus; DEKRAATEX; DETNORVER; EAC; FMEX; GOSTME25; IECEXDEK |

| | |
|---|--|
| Input | |
| Supply voltage | 21.6...26.4 V DC |
| Input current | Max. 4 A |
| Trigger level for the power supply | 21.6...26.4 V DC |
| Fault | < 21 V DC |
| Output, power supply | |
| Output voltage | Input voltage -0.5 V DC / 4 A |
| Output power | 96 W |
| Output current | Max. 4 A |
| Output, status relay in safe zone | |
| Max. switching voltage, AC / Max. switching voltage, DC | 250 V / 30 V |
| Continuous current | 2 A AC / DC |
| AC power, max. | 500 VA / 60 W |
| General data | |
| Degree of efficiency | 0,976 |
| Ambient temperature | -20 °C...+60 °C |
| Power consumption | < 2 W |
| Protection degree | IP 20 |
| Weight | 140 |
| Humidity | 95 %, no condensation |
| EMC standards | IEC 61326-1, NE 21 |
| Approvals | cULus; DEKRAATEX; DETNORVER; EAC; FMEX; GOSTME25; IECEXDEK |

| | |
|---|---|
| Input | |
| Supply voltage | 21.6...26.4 V DC |
| Input current | 0.5...2.5 A DC |
| Trigger level for the power supply | 21.6...26.4 V DC |
| Fault | < 21 V DC |
| Output, power supply | |
| Output voltage | Input voltage -0.5 V DC / 4 A |
| Output power | 96 W |
| Output current | Max. 4 A |
| Output, status relay in safe zone | |
| Max. switching voltage, AC / Max. switching voltage, DC | 250 V / 30 V |
| Continuous current | 2 A AC / DC |
| AC power, max. | 500 VA / 60 W |
| General data | |
| Degree of efficiency | 0,976 |
| Ambient temperature | -20 °C...+60 °C |
| Power consumption | < 2 W |
| Protection degree | IP 20 |
| Weight | 140 |
| Humidity | 95 %, no condensation |
| EMC standards | IEC 61326-1, NE 21 |
| Approvals | cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Length x width x height | / 22.5 / 117.2 |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Length x width x height | / 22.5 / 117.2 |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Length x width x height | / 6.1 / 112.5 |
| Note | |

Ordering data

| | |
|------------------|--|
| Screw connection | |
|------------------|--|

| Type | Qty. | Order No. |
|---------------------|------|------------|
| ACT20-FEED-IN-PRO-S | 1 | 8965500000 |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| ACT20-FEED-IN-BASIC-S | 1 | 1282490000 |

| |
|-------------|
| Note |
|-------------|

| |
|-------------|
| Note |
|-------------|

| |
|-------------|
| Note |
|-------------|

Accessories

| |
|-------------|
| Note |
|-------------|


| |
|------------------------------------|
| DIN mounting rail, see Accessories |
|------------------------------------|

| |
|------------------------------------|
| DIN mounting rail, see Accessories |
|------------------------------------|

Signal converter in a terminal format

The MCZ-SERIES signal converters have a slim terminal design and convert, isolate and monitor analogue signals. They have five tension clamp connections. The open side of the housing can be closed using a standard cover plate accessory. The housing has a low height of just 6.3 cm. It also accommodates a cross-connector for reducing the wiring of multiple module's 24 V and 0 V connections. Two WS10/6 markers can be used for labelling. These are available in MultiCard format and can be printed using Weidmüller's professional printing system.


C

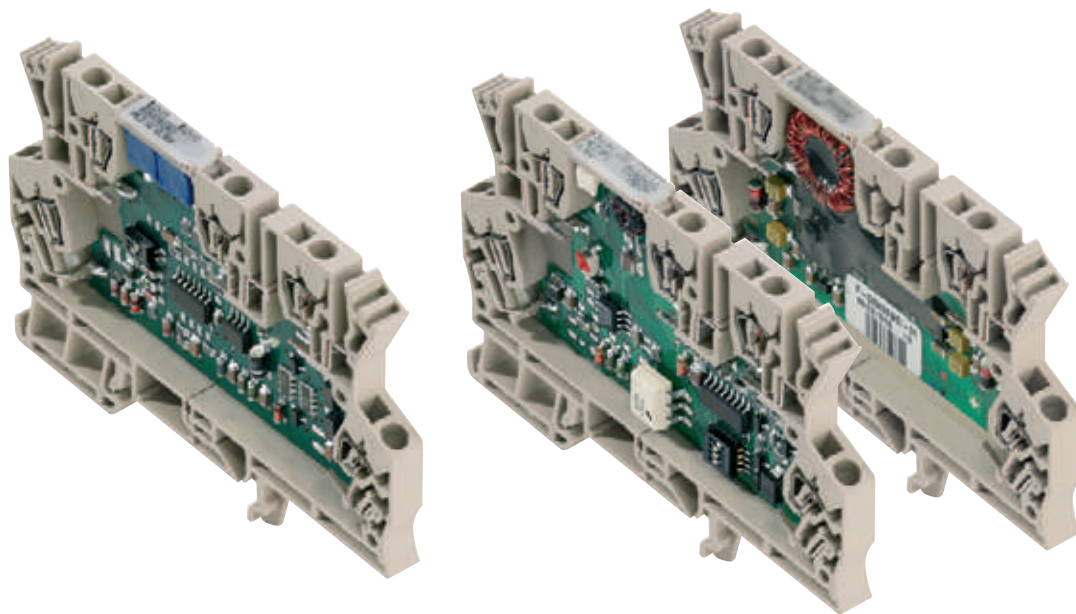

Selection table


| Order No. | Product | Input | | | | | | | Output | | Configuration | Auxiliary power | Rated voltage (V) | Isolation | Connection system | Special characteristics |
|-----------|---------|--------|----------|----------|---------|-----|-----------|-------------|------------|--------|---------------|-----------------|-------------------|-----------|-------------------|-------------------------|
| | | Amount | 0...20mA | 4...20mA | 0...10V | RTD | Frequency | Sensor feed | Width (mm) | Amount | | | | | | |

| Selection table for analog signal converter MCZ series | | | | | | | | | | | | | | | | | |
|--|------------------------------|---|---|---|---|--|---|---|---|---|--------------------------------|---------------|---------|-----|-----------------------|---|-------------------------------|
| 8425720000 | MCZ PT100/3 CLP 0...100C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8483680000 | MCZ PT100/3 CLP 0...120C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8604420000 | MCZ PT100/3 CLP 0...150C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8473010000 | MCZ PT100/3 CLP 0...200C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8473020000 | MCZ PT100/3 CLP 0...300C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8473000000 | MCZ PT100/3 CLP -50C...+150C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8604430000 | MCZ PT100/3 CLP -40C...100C | 1 | | | X | | 6 | 1 | X | | | output loop | 2-way | Z | Passive converter OLP | | |
| 8411190000 | MCZ CCC 0-20mA/0-20mA | 1 | X | X | | | 6 | 1 | X | X | | output loop | 2-way | Z | Passive converter OLP | | |
| 8260280000 | MCZ SC 0-10V | 1 | | | X | | 6 | 2 | | | Limit value transistor output | potentiometer | 24 V DC | | Z | | |
| 8227350000 | MCZ SC 0-20MA | 1 | X | | | | 6 | 2 | | | Limit value transistor output | potentiometer | 24 V DC | | Z | | |
| 8461480000 | MCZ CFC 0-20MA | 1 | X | | | | 6 | 1 | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 | 2-way | Z | Frequency output configurable |
| 8461470000 | MCZ VFC 0-10V | 1 | | | X | | 6 | 1 | | | Frequency: 0...1/ 4/ 8/ 16 kHz | DIP switch | 24 V DC | 100 | 2-way | Z | Frequency output configurable |



Security

Electrical isolation increases the safety of operations and reduces the risk of facility malfunctions.




Saves space in the electrical cabinet


High product density (modules only 6 mm wide) reduces space taken on the DIN rail.





Simple wiring

The power supply can easily be bridged from one module to the next using pluggable cross-connections.

- 

DC/DC passive disconnecter
- 

PT100 /RTD signal converter
- 

Frequency signal converter
- 



Threshold monitoring

MCZ SERIES - DC/DC passive isolator

Input current loop feed

- Passive isolators for galvanic isolation of 0/4...20 mA standard signals.
- The component draws power from the measurement signal and requires no additional auxiliary power
- Low energy consumption, pick-up current of <math>< 100 \mu\text{A}</math>.
- 2-way isolation

MCZ CCC / ILP

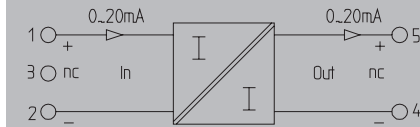

Technical data

Input

Input voltage / Input current
Pick-up current
Voltage drop

Output

Output voltage / Output current
Load impedance, voltage/current
Accuracy
Temperature coefficient
Cut-off frequency (-3 dB)

General data

Configuration
Ambient temperature
Approvals

Insulation coordination

Standards
EMC standards
Insulation voltage

/ 0...20 mA current loop

<math>< 100 \mu\text{A}</math>

2.5...3 V at 20 mA

/ 0...20 mA, 4...20 mA

/ $\leq 500 \Omega$

<math>< 0.1\%</math> of end value

$\leq 50 \text{ ppm/K}$ of measured value at 0 Ω load resistance

100 Hz


none

-25 °C...60 °C

CE, CSA, cURus, EAC

DIN EN 60529, DIN EN 61010-1

EN 61000-6

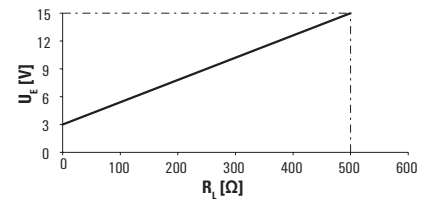

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Tension clamp connection

1.5 / 0.5 / 1.5
63.2 / 6 /

Ordering data

Tension-clamp connection

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| MCZ CCC 0-20mA/0-20mA | 10 | 8411190000 |

Note

Accessories

Note



Cross-connectors for power supplies and markers: refer to accessories

RTD 2-/3-conductor converter

Output-loop powered

- RTD signal converter for galvanic isolation and conversion of PT100 signals
- The component draws power from the output circuit and requires no additional auxiliary power
- 2-way isolation

MCZ PT100/3 CLP / OLP

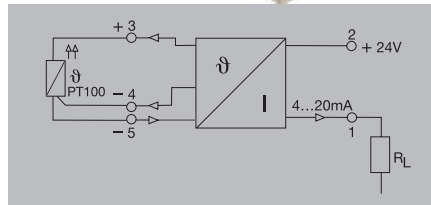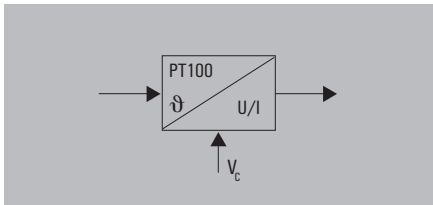

Technical data

| |
|---|
| Input |
| Sensor |
| Sensor supply |
| Output |
| Output current |
| Load impedance, voltage/current |
| General data |
| Configuration |
| Ambient temperature / Storage temperature |
| Accuracy |
| Approvals |
| Standards |
| EMC standards |

| |
|--|
| PT100/2-/3-wire (in compliance with IEC 751) |
| 0.8 mA / 9...30 V DC |
| 4...20 mA (current loop) at 9...30V DC |
| / ≤ 600 Ω |
| none |
| / -25 °C...50 °C / -25 °C...85 °C |
| Typical 0.2%, max. 0.5% of FSR |
| CE; CSA; cURus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 61000-6 |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| |
|---------------------------------|
| Tension clamp connection |
| 1.5 / 0.5 / 1.5 |
| 63.2 / 6 / |

Ordering data

| | |
|---------------|--------------------------|
| -40...+100 °C | Tension-clamp connection |
| -50...+150 °C | Tension-clamp connection |
| 0...100 °C | Tension-clamp connection |
| 0...120 °C | Tension-clamp connection |
| 0...150 °C | Tension-clamp connection |
| 0...200 °C | Tension-clamp connection |
| 0...300 °C | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| MCZ PT100/3 CLP -40C...100C | 10 | 8604430000 |
| MCZ PT100/3 CLP -50C...+150C | 10 | 8473000000 |
| MCZ PT100/3 CLP 0...100C | 10 | 8425720000 |
| MCZ PT100/3 CLP 0...120C | 10 | 8483680000 |
| MCZ PT100/3 CLP 0...150C | 10 | 8604420000 |
| MCZ PT100/3 CLP 0...200C | 10 | 8473010000 |
| MCZ PT100/3 CLP 0...300C | 10 | 8473020000 |

Accessories


| |
|-------------|
| Note |
|-------------|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|


MCZ SERIES - Frequency signal isolator

DC/f converter


The analogue input signal is converted into a configurable frequency signal. Thus analogue signals can be read by the PLC's counter inputs.



MCZ VFC

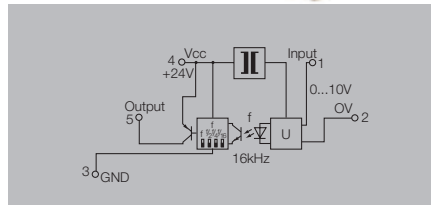

MCZ CFC

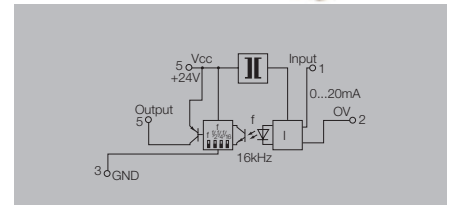

C

Technical data

| |
|---|
| Input |
| Input voltage / Input current |
| Input resistance, voltage/current |
| Voltage drop |
| Output |
| Output frequency |
| Output level |
| Output current |
| Accuracy |
| Temperature coefficient |
| Status indicator |
| General data |
| Configuration |
| Supply voltage |
| Current consumption |
| Current-carrying capacity of cross-connect. |
| Ambient temperature |
| Approvals |
| Insulation coordination |
| Standards |
| EMC standards |
| Rated voltage |
| Impulse withstand voltage |
| Insulation voltage |
| Overvoltage category |
| Pollution degree |
| Clearance & creepage distances |

| |
|----------------------|
| 0...10 V / |
| 100 kΩ / |
| 0...1/ 4/ 8/ 16 kHz |
| PNP, Ub-0.7 V |
| max. 20 mA |
| 0.2% of FSR |
| ≤ 250 ppm/K |
| LED, pulsing |
| DIP switch |
| 24 V DC ± 10 % |
| 14 mA without load |
| ≤ 20 A |
| 0 °C...50 °C |
| CE, EAC |
| DIN EN 50178 |
| EN 55011, EN 61000-6 |
| 100 V |
| 1.5 kV |
| 1 kV DC |
| III |
| 2 |
| ≥ 1.5 mm |

| |
|----------------------|
| / 0...20 mA |
| / 50 Ω |
| 1 V at 20 mA |
| 0...1/ 4/ 8/ 16 kHz |
| PNP, Ub-0.7 V |
| max. 20 mA |
| 0.2% of FSR |
| ≤ 250 ppm/K |
| LED, pulsing |
| DIP switch |
| 24 V DC ± 10 % |
| 14 mA without load |
| ≤ 20 A |
| 0 °C...50 °C |
| CE, EAC |
| DIN EN 50178 |
| EN 55011, EN 61000-6 |
| 100 V |
| 1.5 kV |
| 1 kV DC |
| III |
| 2 |
| ≥ 1.5 mm |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| |
|---------------------------------|
| Tension clamp connection |
| 1.5 / 0.5 / 1.5 |
| 63.2 / 6 / |

| |
|---------------------------------|
| Tension clamp connection |
| 1.5 / 0.5 / 1.5 |
| 63.2 / 6 / |

| |
|--------------------------|
| Ordering data |
| Tension-clamp connection |

| Type | Qty. | Order No. |
|---------------|------|------------|
| MCZ VFC 0-10V | 10 | 8461470000 |

| Type | Qty. | Order No. |
|----------------|------|------------|
| MCZ CFC 0-20mA | 10 | 8461480000 |

| |
|-------------|
| Note |
|-------------|


| |
|--------------------|
| Accessories |
| Note |

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|



| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

Transistor output


- 2 digital outputs
- Monitoring of upper and lower limit values
- 3 selectable input ranges: 300 mV...10 V, 30 mV...1 V, 10 mV...100 mV

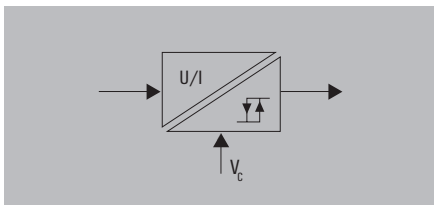

MCZ SC 0...10 V

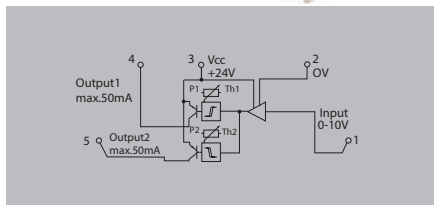

MCZ SC 0...20 mA

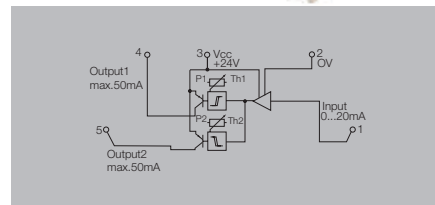

Technical data

| |
|-----------------------------------|
| Input |
| Input voltage / Input current |
| Input resistance, voltage/current |
| Voltage drop |
| Output |
| Contact assembly |
| Function |
| Switching thresholds |
| Hysteresis |
| Switching current |
| Step response time |
| Cut-off frequency (-3 dB) |
| Temperature coefficient |
| General data |
| Configuration |
| Supply voltage |
| Ambient temperature |
| Approvals |
| Insulation coordination |
| Standards |
| EMC standards |

| |
|---|
| 0...10 V / |
| 60 kΩ / |
| double switch output PNP |
| $U_{in} < U_{Th1}$: output 1 active / $U_{in} > U_{Th2}$: output 2 active |
| Via 2 potentiometers (12 turns) |
| 1% of adjusted final value |
| 50 mA - per channel (voltage drop at transistor: < 1.2 V at 50 mA) |
| < 250 μs (switching threshold at 90% of max. input signal; $R_i \leq 1$ kΩ) |
| 100 Hz |
| max. 250 ppm/K |
| Potentiometer |
| 24 V DC ± 20 % |
| 0 °C...50 °C |
| CE; CSA; cURus; EAC |
| DIN EN 50178 |
| EN 55011, EN 61000-6 |

| |
|---|
| / 0.5...20 mA |
| / 50 Ω |
| 1 V |
| double switch output PNP |
| $I_{in} < I_{Th1}$: Output 1 active / $I_{in} > I_{Th2}$: Output 2 active |
| Via 2 potentiometers (12 turns) |
| 1% of adjusted final value |
| 50 mA - per channel (voltage drop at transistor: < 1.2 V at 50 mA) |
| < 250 μs (switching threshold at 90% of max. input signal; $R_i \leq 1$ kΩ) |
| 100 Hz |
| max. 250 ppm/K |
| Potentiometer |
| 24 V DC ± 20 % |
| 0 °C...50 °C |
| CE; CSA; cURus; EAC |
| DIN EN 50178 |
| EN 55011, EN 61000-6 |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| |
|---------------------------------|
| Tension clamp connection |
| 1.5 / 0.5 / 1.5 |
| 63.2 / 6 / |

| |
|---------------------------------|
| Tension clamp connection |
| 1.5 / 0.5 / 1.5 |
| 63.2 / 6 / |

Ordering data

| |
|--------------------------|
| Tension-clamp connection |
|--------------------------|

| Type | Qty. | Order No. |
|--------------|------|------------|
| MCZ SC 0-10V | 10 | 8260280000 |

| Type | Qty. | Order No. |
|---------------|------|------------|
| MCZ SC 0-20MA | 10 | 8227350000 |

| |
|-------------|
| Note |
|-------------|

Accessories

| |
|-------------|
| Note |
|-------------|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

Signal converters

| | | |
|--------------------------|--|------|
| Signal converters | Universal signal converters - Overview | D.2 |
| | ACT20C - Overview | D.4 |
| | ACT20C - Network-compatible signal converter | D.7 |
| | ACT20C - Station | D.8 |
| | ACT20P - Overview | D.16 |
| | ACT20P - Universal measurement converter | D.20 |
| | ACT20P - Signal splitter | D.26 |
| | ACT20P - Signal converter | D.27 |
| | ACT20P - Limit value monitoring | D.29 |
| | ACT20P - Current measuring transducer | D.32 |
| | ACT20P - Bridge measuring transducer | D.34 |
| | WAVESERIES - Overview | D.38 |
| | WAVESERIES - Universal signal converters and trip amplifiers, configurable | D.40 |
| | WAVESERIES - DC/DC 3-way isolator | D.44 |
| | WAVESERIES - DC/DC 2-way isolator | D.54 |
| | WAVESERIES - DC/DC passive isolator | D.56 |
| | WAVESERIES - Temperature measuring transducer | D.60 |
| | WAVESERIES - Frequency signal isolator/converter configurable | D.70 |
| | WAVESERIES - Current measuring transducer | D.72 |
| | WAVESERIES - Voltage measuring transducer | D.74 |
| | Isolating converter for serial interfaces | D.76 |

Signal converters

Weidmüller analogue conditioners and monitoring modules are offered in touch-safe IP 20 housings and with space-saving DIN mounting.

This product line includes: passive and active isolation amplifiers for analogue current and voltage signals; measurement isolators for measuring temperatures, resistances, frequencies, AC/DC currents and voltages; and universally-configurable signal isolating converters with integrated threshold monitoring.

Weidmüller wide product range covers all the functions for isolating, converting and monitoring analogue signals. These products can therefore be used in practically all industrial measurement applications to safeguard the basic functionality between field signals and post-processing systems. A comprehensive line of accessories is also available for the analogue signal converter product line. These include pluggable cross-connectors, markers, and configuration adapters for the software-programmable products.

Features

- Can handle a variety of measurements
- Standard analogue signals on the output side
- Configurable options
- Stand-alone, pluggable connection mechanism – screw or tension clamp
- Tool-free installation
- Minimal commissioning needed - often with no calibration.
- Minimal wiring effort – with pluggable ZQV 2.5N cross-connector
- Excellent functionality
- Clear type designations makes selection easy
- High level galvanic isolation
- International approvals





ACT20C



ACT20P



WAVESERIES

Your process requires the utmost attention


Our new ACT20C signal conditioners support you in achieving this

Many process parameters in your system are handled by your control system, which shows you the current status of your process. Even so, do you have a full overview of critical system states? And this at all times, at every location, and with the recent system history?

With the ACT20C, you receive accurate information on the status of the sensors, signal processing and cabling. Data can be called up and will depending on your individual communications infrastructure. This comprehensive overview allows you to accurately analyse errors and faults, and initiate targeted actions taken by system operators and maintenance personnel. By doing so, this technology contributes to ensuring reliable system operation.



D

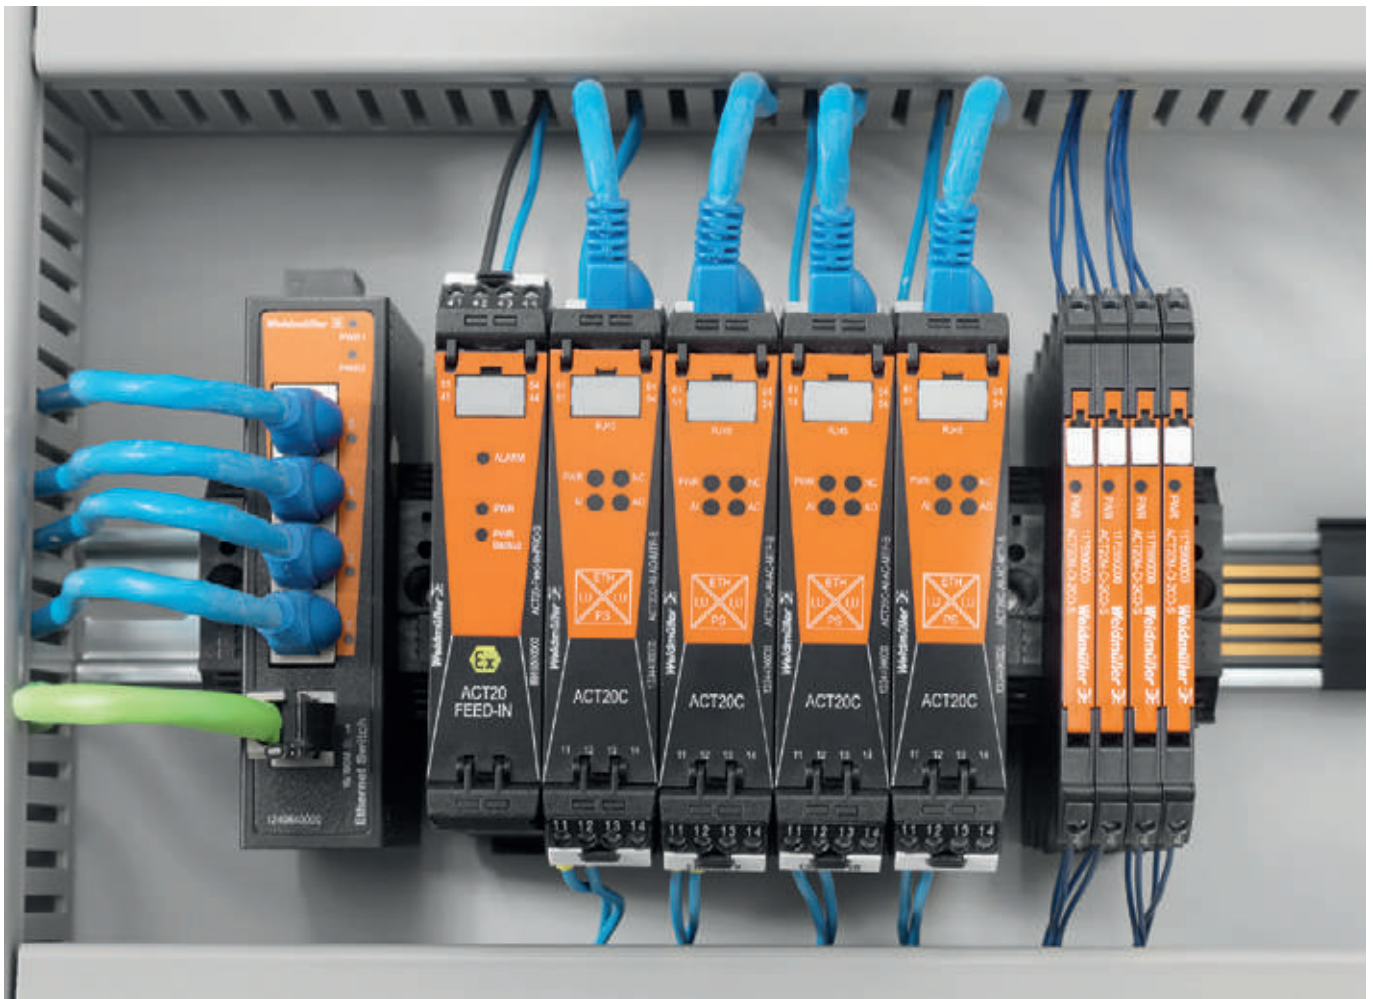

ACT20C signal conditioner with Ethernet interface

Comprehensive process transparency is provided by the transfer of diagnostics information, signals and data

You would like more process transparency for your systems. We support you with signal conditioners that supply you with precise information via our Ethernet interface. Let's connect.

To be able to control systems and processes optimally, you require a constant flow of information on the current states of individual applications, devices and functions.

Our ACT20C signal conditioner not only monitors the signal conversion, but also communicates precise information on device status, signals and data directly to connected computer and control systems.

Our Ethernet interface enables an event-controlled transfer of diagnostics information, which in turn supports the elimination of faults in, for example, plant operation.



Universal signal conversion

Can be used in a multitude of applications thanks to customer and application specific defined conversion methods with just one single module.



Simple operation and configuration

Software supported configuration allows a fast application of settings and simple operation.



Simple remote access

Continuous monitoring of device and system functions, simple and affordable integration of existing Ethernet networks.



Detailed analysis and presentation of core process parameters


The ACT20C supplies key parameters and historical data, independent of the location

Thanks to the ACT20C, Weidmüller is now the first to offer a solution which supplies you with extensive diagnostic and status information without the need to deal with the complexity of field bus systems.

The isolating converters are based on the proven, robust technology of transferring analogue signals to the DCS system. Various signal sources and field devices can be connected to the input side of the isolating converters. As a result of this, the ACT20C can be configured for the user-defined processing of current, voltage and transmitter signals. Access is accomplished via a service interface on

the front panel or via the Ethernet, and performance is ensured through the manufacturer-independent FDT/DTM software platform. To work with this platform, Weidmüller provides the WI-Manager universal FDT frame application.

Data collected in the ACT20C is made available over the Ethernet via Modbus TCP. Depending on the communications infrastructure, you can make this data available to your SCADA system within your network, and you can also access it via the Internet from any location using an industrial Ethernet router.

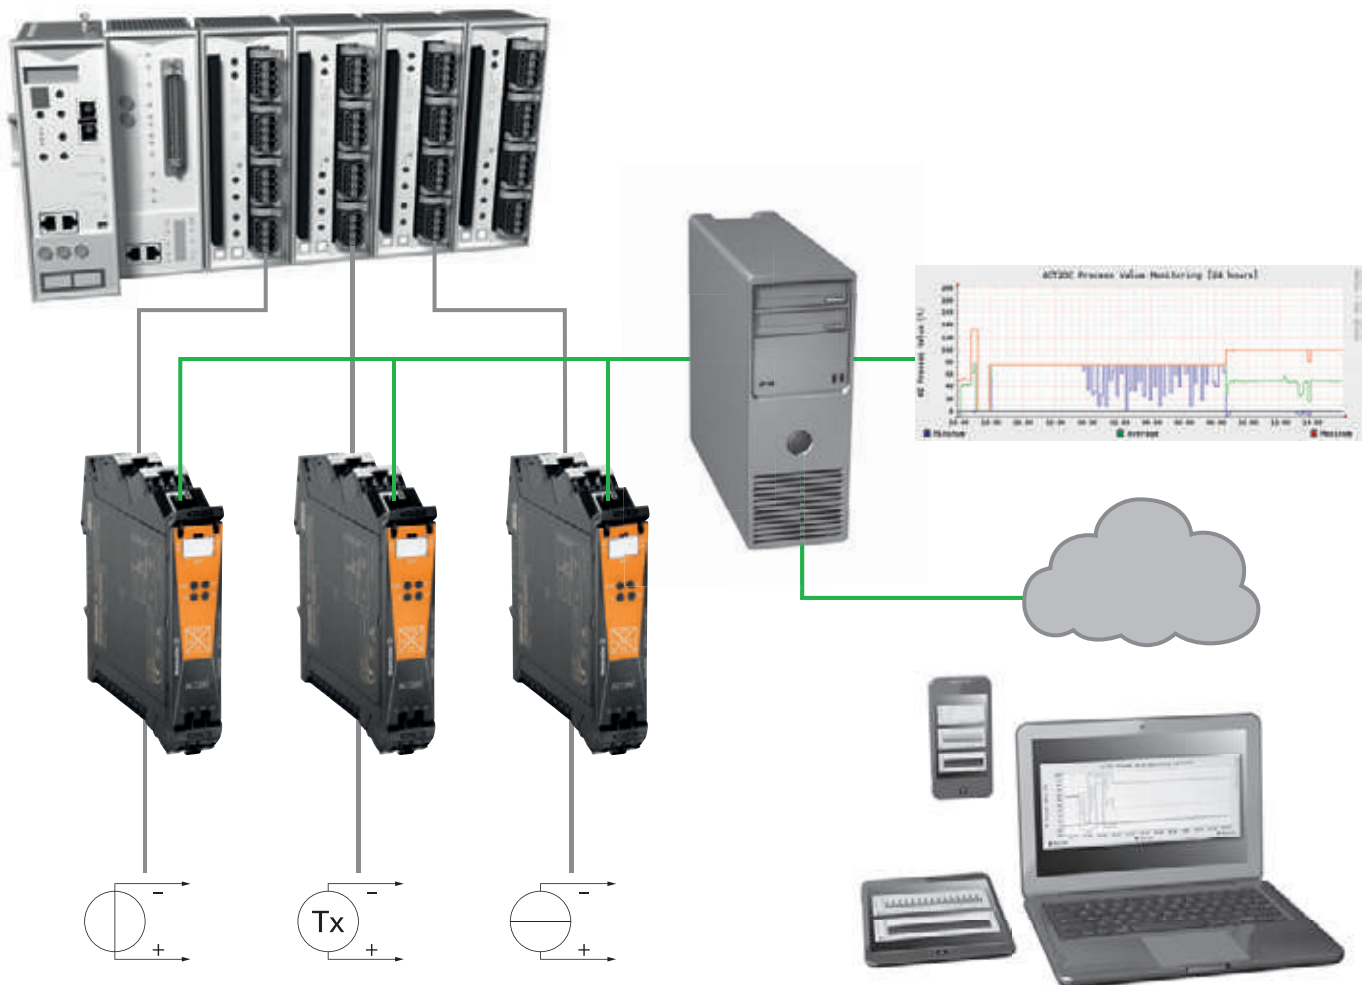


Network-ready signal converter for DC voltage and current signals

Network-compatible signal converter with Ethernet

- Scalable current or voltage input
- Current or voltage output
- Limit-value monitoring with parameterisation options
- Diagnostics on device status, signals and line faults via Modbus
- PC configuration with FDT/DTM software, download link at www.weidmueller.com

ACT20C-AI-AO-MTCP-S

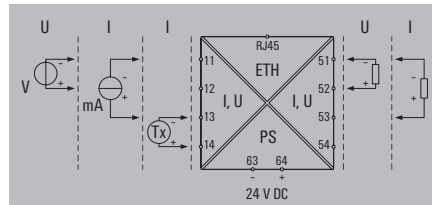

Technical data

| | |
|--|---|
| Input | |
| Input current | 0...20 mA, 4...20 mA |
| Input voltage | 0...10 V |
| Sensor supply | > 17 V DC at 20 mA |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| Output voltage | 0...10 V |
| load impedance current | ≤ 500 Ω |
| load impedance voltage | ≥ 10 kΩ |
| Signal processing | |
| Transfer functions | Linear, Inverse |
| Limit-value monitoring | Process alarms with adjustable delay and hysteresis |
| Condition Monitoring | Process value: sensor value, output value |
| Diagnostics | Device status, Short-circuit (input/output), Cable break (input/output), Overload (sensor/output) |
| General data | |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | ≤ 3,5 W |
| Accuracy | < 0.15% end value (+ 0.05% > 55°C), Current: 1 uA / 30 uA (+ 10 uA > 55°C), Voltage: 1 mV / 15 mV (+ 5 mV > 55°C) |
| Temperature coefficient | ≤ 0.01 % / °C |
| Ambient temperature (operational) | -20 °C...70 °C |
| Storage temperature | -20 °C...85 °C |
| Humidity | 0...95 % (no condensation) |
| Protection degree | IP 20 |
| Insulation coordination | |
| Galvanic isolation | 4-way isolator, between input / output / power supply / Ethernet |
| Rated voltage / test voltage: input/output to output/input / supply/ Ethernet interface | 300 V _{rms} / 1.7 kV _{rms} on secondary electric circuits, reinforced insulation |
| Rated voltage / test voltage: Ethernet interface to supply / functional earth to supply / Ethernet interface | 31.2 VDC / 0.9 kV _{rms} on secondary electric circuits, basic insulation |
| Rated voltage / test voltage: functional earth to input / output | 300 V _{rms} / 1.1 kV _{rms} on secondary electric circuits, basic insulation |
| Pollution degree | 2 |
| Communication | |
| RJ45 ports | 10/100BaseT(X), auto negotiation |
| Interface | RJ45: female-female, Cat.5 to 100 MHz, Jack plug for CBX200 |
| Addressing | DHCP or manual adjustment |
| Protocol | FDT/DTM, Modbus/TCP |
| Configuration | FDT/DTM (Ethernet or service interface) |
| Approvals | |
| Standards | DIN EN 61010-1, EN 61326-1:2006 |
| Recommendations | Namur NE43, Namur NE44, Namur NE107 |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 mm ² /0.5 mm ² /2.5 mm ² |
| Depth x width x height/Weight | 113.6/22.5/180 g |
| Note | |

| | |
|--|---|
| Input | |
| Input current | 0...20 mA, 4...20 mA |
| Input voltage | 0...10 V |
| Sensor supply | > 17 V DC at 20 mA |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| Output voltage | 0...10 V |
| load impedance current | ≤ 500 Ω |
| load impedance voltage | ≥ 10 kΩ |
| Signal processing | |
| Transfer functions | Linear, Inverse |
| Limit-value monitoring | Process alarms with adjustable delay and hysteresis |
| Condition Monitoring | Process value: sensor value, output value |
| Diagnostics | Device status, Short-circuit (input/output), Cable break (input/output), Overload (sensor/output) |
| General data | |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | ≤ 3,5 W |
| Accuracy | < 0.15% end value (+ 0.05% > 55°C), Current: 1 uA / 30 uA (+ 10 uA > 55°C), Voltage: 1 mV / 15 mV (+ 5 mV > 55°C) |
| Temperature coefficient | ≤ 0.01 % / °C |
| Ambient temperature (operational) | -20 °C...70 °C |
| Storage temperature | -20 °C...85 °C |
| Humidity | 0...95 % (no condensation) |
| Protection degree | IP 20 |
| Insulation coordination | |
| Galvanic isolation | 4-way isolator, between input / output / power supply / Ethernet |
| Rated voltage / test voltage: input/output to output/input / supply/ Ethernet interface | 300 V _{rms} / 1.7 kV _{rms} on secondary electric circuits, reinforced insulation |
| Rated voltage / test voltage: Ethernet interface to supply / functional earth to supply / Ethernet interface | 31.2 VDC / 0.9 kV _{rms} on secondary electric circuits, basic insulation |
| Rated voltage / test voltage: functional earth to input / output | 300 V _{rms} / 1.1 kV _{rms} on secondary electric circuits, basic insulation |
| Pollution degree | 2 |
| Communication | |
| RJ45 ports | 10/100BaseT(X), auto negotiation |
| Interface | RJ45: female-female, Cat.5 to 100 MHz, Jack plug for CBX200 |
| Addressing | DHCP or manual adjustment |
| Protocol | FDT/DTM, Modbus/TCP |
| Configuration | FDT/DTM (Ethernet or service interface) |
| Approvals | |
| Standards | DIN EN 61010-1, EN 61326-1:2006 |
| Recommendations | Namur NE43, Namur NE44, Namur NE107 |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 mm ² /0.5 mm ² /2.5 mm ² |
| Depth x width x height/Weight | 113.6/22.5/180 g |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|-------------------|------|------------|
| ACT20C-AI-AO-MTCP | 1 | 1334490000 |

Take a preventative approach to monitoring plants and processes

ACT20C gateway conveys precise status information on your devices

Diagnostic and status information that's as comprehensive as possible and comes from all areas of an automation solution goes a long way in helping to optimise process control.

D

With the ACT20C gateway and the communication-capable signal converters, for the first time ever we can obtain process data from the signal conversion level – regardless of the automation solution selected. An Ethernet interface enables simple access to the desired information. The data obtained in the ACT20C gateway is provided via Modbus TCP or OPC, or can be displayed directly in an FDT frame application.

The flexibility of the ACT20C gateway makes it easy for you to optimise your processes. Depending on the communication infrastructure, you can make this data available throughout your entire network or pass it on to your SCADA or maintenance system. The data can even be used from any location over the Internet via an Industrial Ethernet router.



The Ethernet interface enables events-driven transmission of diagnostic information. So, for example, measurement data about the pumps, which is continuously collected throughout their service life, provides information about their performance and operational status.

Your special advantages:

More transparency in your process automation

For the first time ever, extensive diagnostic and status information (which you can call up via the Ethernet interface) is available to you at status conversion level.


All the process parameters at a glance

The status of devices, environmental conditions and functions is continually monitored over the Ethernet.



Simple commissioning, fast maintenance

The station concept with "Plug & Produce" and "Hot Swapping" makes installation and maintenance work faster and thus more efficient.

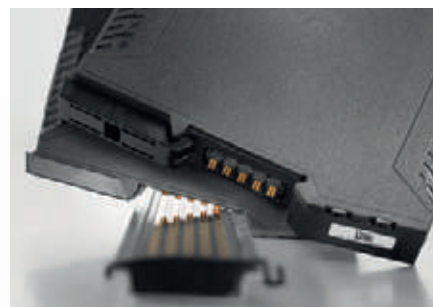

Extensive diagnostics concept

Support of fast and exact cause analysis according to NE107, NE43 and NE44.



Clever software configuration

The software configuration based on the FDT and FDT2 standards makes parameterisation, documentation and data backup easier.





Condition monitoring

Preventative maintenance strategies using automation-independent information about operating conditions and process data for connected devices.



Multiple limit value monitoring

The main alarm and auxiliary alarm permit precise identification of all alarm situations.

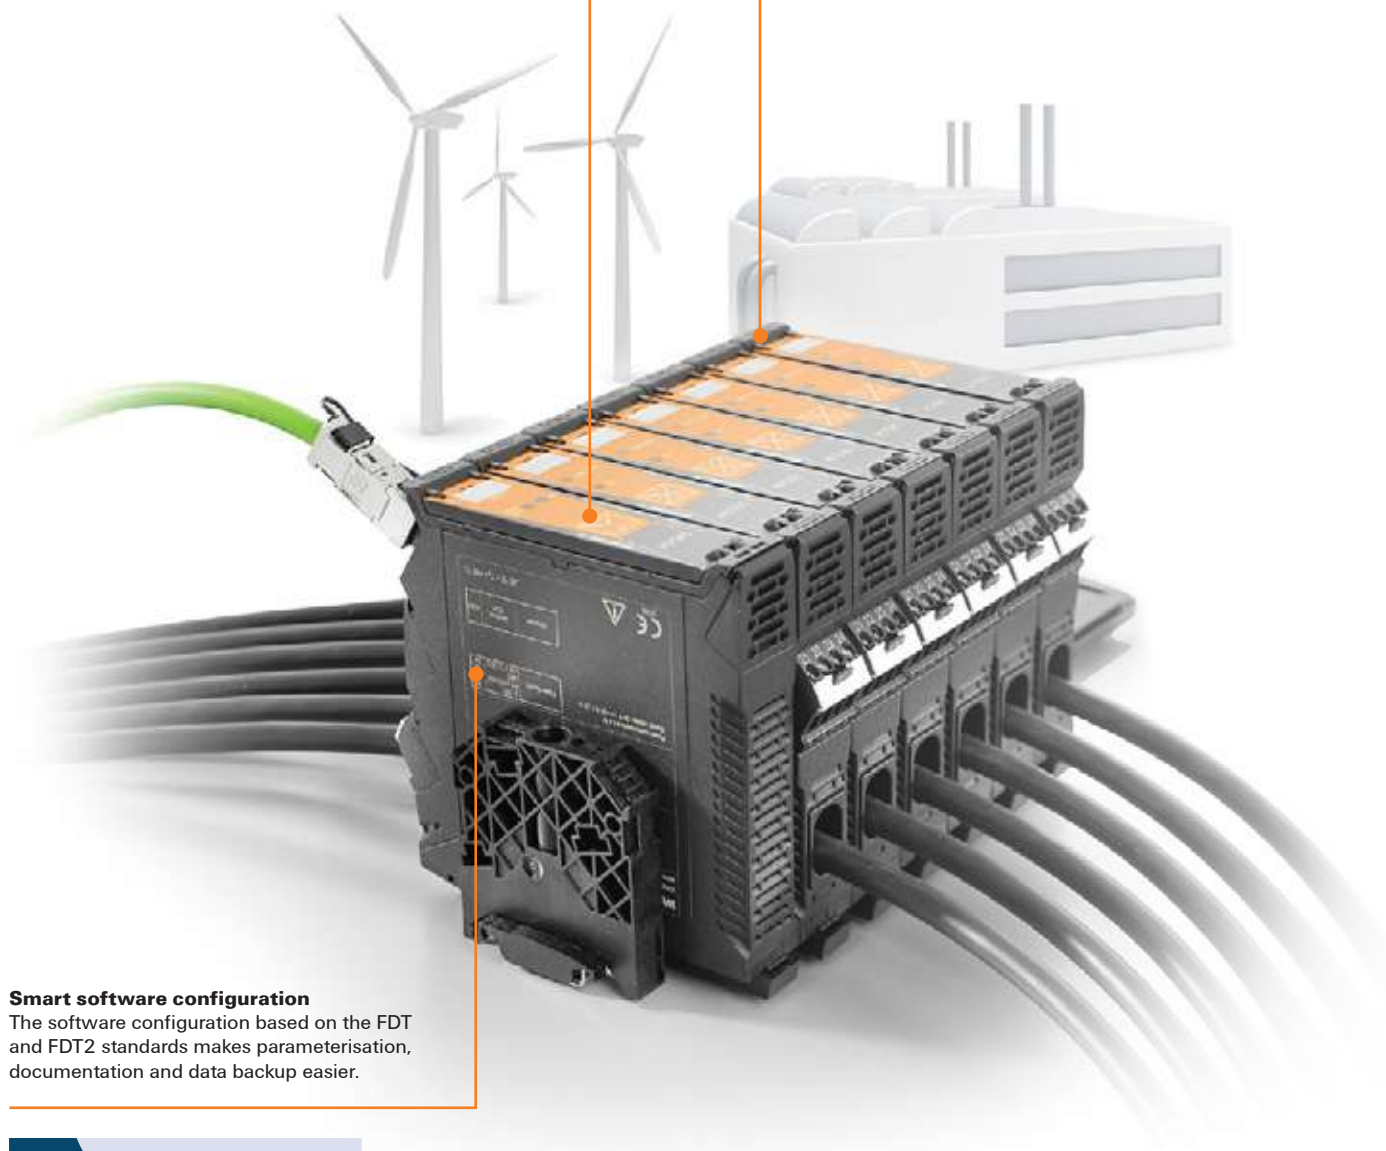

Smart software configuration

The software configuration based on the FDT and FDT2 standards makes parameterisation, documentation and data backup easier.





High process reliability

A galvanic four-way isolation and an impulse withstand voltage of 6.4 kV pursuant to IEC 61010-2-201 guarantee optimum fusing.

Gateway for ACT20C station

- Access to all data from the devices connected to an ACT20C station
- RJ45 port with Ethernet TCP/IP
- Configuration by means of the FDT/DTM standard
- Station management with "Plug & Produce" and "Hot Swapping"

ACT20C-GTW-100-MTCP-S

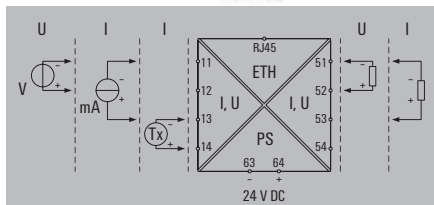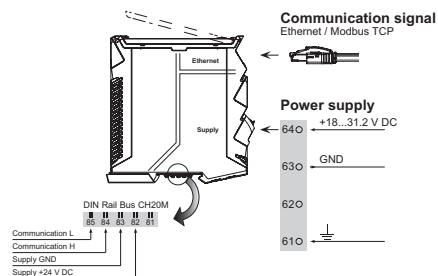

Technical data

| Communication | |
|--|--|
| Addressing | DHCP or manual adjustment |
| Configuration | With FDT/DTM software, DHCP |
| RJ45 ports | 10/100BaseT(X), auto negotiation |
| Interface | Ethernet 10/100 Base T, Jack plug for CBX200, Communication via CH20M rail bus with all current measuring transducers (ACT20C-CMT-x) |
| General data | |
| Configuration | With FDT/DTM software, DHCP |
| Power consumption, max. | 2.2 W |
| Supply voltage | 16,8 V...31,2 V |
| Insulation coordination | |
| Rated voltage / test voltage: Ethernet interface to supply / functional earth to supply / Ethernet interface | 30 V AC RMS |
| Standards | IEC 61010-1, IEC 61010-2-201:2013, 1st Edition, IEC 61326-1:2012 |
| Test voltage | 1.1 kV |
| Impulse withstand voltage | 0,5 kV (1.2/50 µs) |
| Pollution degree | 2 |
| Overtoltage category | II |

| Dimensions | | |
|--|-------------------------|------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 | |
| Depth / Height / Width | 113.6 / 117.2 / 22.5 mm | |
| Note | | |
| | | |
| Ordering data | | |
| Type | Qty. | Order No. |
| ACT20C-GTW-100-MTCP-S | 1 | 1510370000 |
| Note | | |
| | | |
| Accessories | | |
| Note | | |
| | | |

| Dimensions | |
|--|-------------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth / Height / Width | 113.6 / 117.2 / 22.5 mm |
| Note | |
| | |

| Ordering data | | |
|-----------------------|------|------------|
| Type | Qty. | Order No. |
| ACT20C-GTW-100-MTCP-S | 1 | 1510370000 |
| Note | | |
| | | |

| Note | |
|------|--|
| | |



| Accessories | |
|-------------|--|
| Note | |
| | |

ACT20C – Station

Communicative current-measuring transducer

- Measurement and monitoring of AC/DC current
- Input and output ranges are adjustable
- Contact-free through-hole technology
- Relay output for limit value alarm with switching threshold, delay, hysteresis
- Monitoring/configuration via ACT20C station/gateway

ACT20C-CMT

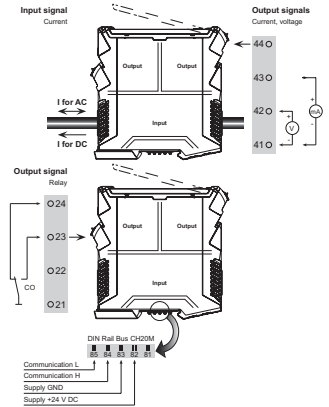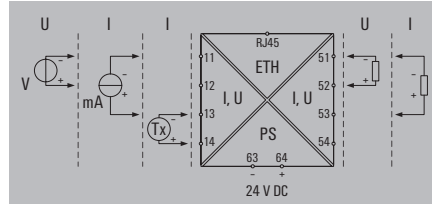

Technical data


| | |
|---|---|
| Input | |
| Input measurement range | configurable, 0...5/10 A AC (RMS) or DC, 0...40/50/60 A AC (RMS) or DC |
| Input signal | Current-carrying cable in feed-through hole, Diameter 10.5 mm |
| Input frequency | AC: 15...700 Hz |
| Output (analogue) | |
| Output voltage [output analogue] | adjustable, 0...10 V, 2...10 V, 0...5 V, 1...5 V, -5...+5 V, -10...+10 V |
| Output current [output analogue] | adjustable, 0...20 mA, 4...20 mA, -20...+20 mA |
| Load resistance current [output analogue] | ≤ 600 Ω |
| Load resistance voltage [output analogue] | ≥ 10 kΩ |
| Output (digital) | |
| Type | Relay, 1 CO contact, Process alarms (4x) with hysteresis, with alarm delay (configurable) 0...180 s |
| Rated switching current | 6 A |
| Max. switching voltage, AC | 250 V |
| General data | |
| Configuration | With FDT/DTM software, via gateway (ACT20C-GTW-100-MTCP-S), Addressing via DIP switches |
| Step response time | < 300 ms |
| Temperature coefficient | ≤ 200 ppm/K |
| Supply voltage | 16,8 V...31,2 V, via the system bus |
| Insulation coordination | |
| Rated voltage | 300 V AC _{max} |
| EMC standards | IEC 61326-1 |
| Galvanic isolation | 4-way isolator, between input/output/supply/relay |
| Test voltage | 4 kV |
| Impulse withstand voltage | 6.4 kV (1.2/50 μs) |
| Pollution degree | 2 |
| Overvoltage category | III |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth / Height / Width | 113.6 / 117.2 / 22.5 mm |
| Note | |

Ordering data

| | | | |
|--|-----------------------|------|------------|
| Input measurement range 0...5/10 A | Type | Qty. | Order No. |
| Input measurement range 0...40/50/60 A | ACT20C-CMT-10-AD-RC-S | 1 | 1510240000 |
| | ACT20C-CMT-60-AD-RC-S | 1 | 1510420000 |
| Note | | | |

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

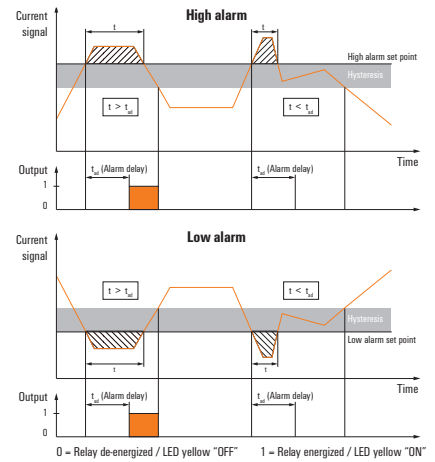


| User address | DIP switch S1 | | | | | |
|--------------|---------------|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 |
| 2 | | ■ | | | | |
| 3 | ■ | ■ | | | | |
| 4 | | | ■ | | | |
| 5 | ■ | | | | | |
| 6 | | ■ | ■ | | | |
| 7 | ■ | ■ | ■ | | | |
| 8 | | | | ■ | | |
| ... | | | | | | |
| 16 | | | | | ■ | |
| ... | | | | | | |
| 32 | | | | | | ■ |
| 33 | ■ | | | | | ■ |

■ = ON

Bus termination terminal

- Electrical termination of the CH20M rail bus of an ACT20C station
- Acts as a mechanical end bracket at the same time

ACT20C-LBT-10

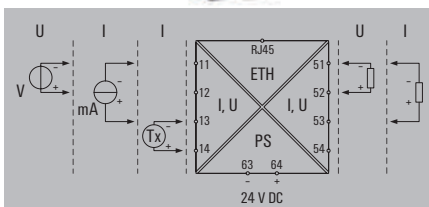

Technical data

Humidity
Ambient temperature

General data

Tightening torque, min.
Tightening torque, max.
Mounting rail

5...95 %, no condensation
-25 °C...+60 °C

1.2 Nm
2.4 Nm
TS 35

Dimensions

Depth / Width / Height

63 / 20.6 / 56

Note

Ordering data

| Type | Qty. | Order No. |
|---------------|------|------------|
| ACT20C-LBT-10 | 1 | 1510340000 |

Note


Accessories

Note

CH20M rail bus

Quick and safe power supply through the DIN rail.

This customer-friendly infrastructure solution brings power, signals and data to the rail in a quick and reliable manner. The rail bus can replace the tedious individual wiring process with a flexible and uninterrupted system solution. As a result, the customer saves time and cost-especially if any module changes are needed later, as other adjacent modules are not disturbed. The uninterrupted system bus is securely integrated within the 35 mm standard mounting rail. Whether 7.5 mm or 15 mm high, the custom-fit rail profiles are easy to install on all TS 35 standard rails in accordance with DIN EN 60715.

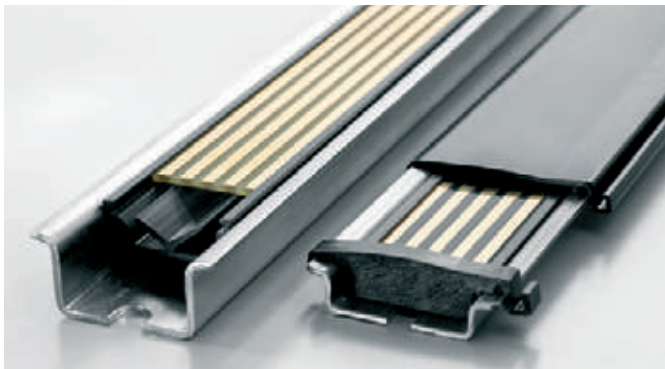

The resistant gold-plated contacts ensure a permanent and reliable contact. The ACT20M modules are simply snapped onto the mounting rail and are automatically in contact with the DIN rail bus.

The supply of 24 V DC to the power rail can be from any one of the auxiliary powered ACT20M modules, when that module is itself externally supplied. This allows the rail to power up to 8 other modules (approximately 400 mA). For powering additional ACT20Ms, a separate Feed-In module can be used.

The ACT20-Feed-In-Basic provides a simple and compact (6 mm width) power supply interface to the rail, for supplying up to 2.5 A (up to 50 x ACT20M modules).



The ACT20-Feed-In-Pro is a more powerful 22.5 mm wide solution. This takes 2 external 24 V DC inputs, and via internal diodes provides a redundant supply to the rail, and an alarm output in the case of input failure.

Rail bus accessories

CH20M BUS-PROFIL TS35x7.5/1000

Support section for bus circuit board



- Support section for TS 35 x 7.5
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x7.5/250 | 10 | 1248150000 |
| CH20M BUS-PROFIL TS35x7.5/500 | 10 | 1248160000 |
| CH20M BUS-PROFIL TS35x7.5/750 | 5 | 1248170000 |

CH20M BUS-PROFIL TS35x15/1000

Support section for bus circuit board



- Support section for TS 35 x 15
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x15/250 | 5 | 1248180000 |
| CH20M BUS-PROFIL TS35x15/500 | 5 | 1248190000 |
| CH20M BUS-PROFIL TS35x15/750 | 5 | 1248210000 |

CH20M BUS 4.50/05 AU/1000

Bus PCB



- Bus circuit board for use on TS 35 x 7.5 and TS 35 x 15
- Length: 250, 500 or 750 mm
- Five conductor paths, gold-plated
- Electrical rating: 63 V AC, 5 A/conductor path

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| CH20M BUS 4.50/05 AU/250 | 10 | 1248220000 |
| CH20M BUS 4.50/05 AU/500 | 10 | 1248230000 |
| CH20M BUS 4.50/05 AU/750 | 5 | 1248240000 |

CH20M BUS-ADP TS35/1000

Cover plate



- Cover plate for DIN rail bus
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------|------|------------|
| CH20M BUS-ADP TS35/250 | 10 | 1248250000 |
| CH20M BUS-ADP TS35/500 | 10 | 1248260000 |
| CH20M BUS-ADP TS35/750 | 5 | 1248270000 |

CH20M BUS-AP LI TS35x7.5 & 15

End plate



- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- left

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP LI TS35x7.5 & 15 | 50 | 1193160000 |

CH20M BUS-AP RE TS35x7.5 & 15

End plate




- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- right

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP RE TS35x7.5 & 15 | 50 | 1193170000 |

SET CH20M BUS 250MM TS 35X15

Set

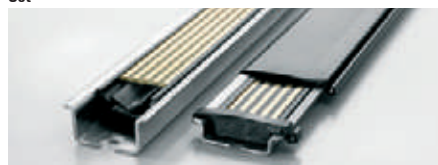


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X15/250

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X15 | 1 | 1335150000 |

SET CH20M BUS 250MM TS 35X7.5

Set

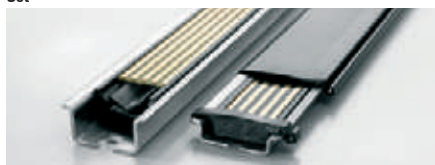


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X7.5/250

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X7.5 | 1 | 1335140000 |

TS 35x7.5 / TS 35x15

DIN rail

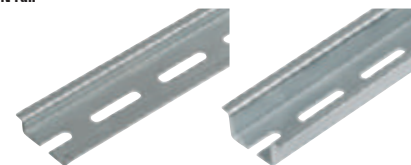

- DIN rail with slot
- Passivated galvanised steel

Ordering data

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| TS 35x7.5/LL 1M/ST/ZN | 10 | 0514510000 |
| TS 35x15/LL 1M/ST/ZN | 10 | 0236510000 |

Your systems work with analogue current signals

ACT20P signal converters efficiently tackle signal conditioning and isolation

Your systems and processes are controlled using analogue current signals. Our signal isolation converters are the reliable and efficient solution to signal conditioning and galvanic isolation of current signals. Let's connect.

D

Temperature, pressure, weight or distance: your system's sensors pass on a wide range of analogue signals. During this process, undesirable transients may occur, causing faults and damaging your controls' inputs.

Our ACT20P signal converter delivers reliable protection of controls and remote I/O inputs against transients and voltage peaks. It also adapts a multitude of signal variants to standard signals, in addition to being space-saving and efficient.

Its properties make the ACT20P signal converter a low-cost universal solution to all tasks involving the analogue isolation and conversion of current signals.



Fault-free recording of measured data in water management

During the final step of water purification, quality values are checked. To this end, the signals emitted by the measurement devices are transferred over several hundred metres from the switching box on the last setting basin to the plant control room. There, they are recorded, analysed and stored. For a smooth measurement data recording process, our signal isolation converters filter out all of the faults and transients according to the latest provisions set forth in EN 61010.

Can be integrated in HART® communication
Signal converters are suitable for HART®, transparent communication.



Reliable connection
Individually customisable protection against mismatching.



Rapid device replacement
Practical release lever for simple removal of the female connector.



More space in the cabinet
Two channels measure a mere 12.5 mm wide.



Variants for different applications
The range of products is rounded off by the intrinsically safe ACT20X signal converter and the high-performance ACT20M signal converter, which is just 6 mm across.



ACT20P – Selection table

D


Selection table

| Order No. | Product | Width (mm) | Input | | | | | | | | Miscellaneous | Output | | | | | Configuration |
|--|-----------------------|------------|--------|----------|----------|---------|--------|----|-----|-----------|---|-------------|--------|----------|----------|--|---------------------------|
| | | | Amount | 0...20mA | 4...20mA | 0...10V | 0...5V | TC | RTD | Frequency | | Sensor feed | Amount | 0...20mA | 4...20mA | 0...10V | |
| Signal converter | | | | | | | | | | | | | | | | | |
| 7760054114 | ACT20P-CI-CO | 12.5 | 1 | X | X | | | | | X | 2-/3-wire transmitter | 1 | X | X | | | |
| 7760054115 | ACT20P-CI-2CO | 12.5 | 1 | X | X | | | | | X | 2-/3-wire transmitter | 2 | X | X | | | |
| 7760054117 | ACT20P-2CI-2CO-12 | 12.5 | 2 | X | | | | | | | | 2 | X | X | | | |
| Bridge-measuring transducer | | | | | | | | | | | | | | | | | |
| 1067250000 | ACT20P-BRIDGE-S | 22.5 | 1 | | | | | | | X | 4-,6-, wire strain gauges | 1 | X | X | X | Reset button (TARE) | |
| Universal measuring converter | | | | | | | | | | | | | | | | | |
| 1481970000 | ACT20P-PRO DCDC II-S | 12.5 | 1 | X | X | X | X | | | X | ± 100 mA, ± 300 V | 1 | X | X | X | ± 10 V, ± 20 mA | Display, DIP switch |
| 1453210000 | ACT20P-UI-AO-DO-LP-S | 12.5 | 1 | X | X | X | X | X | X | X | ± 25 mA, ± 5 A DC, ± 28 V DC, ± 300 V DC, 300 V AC | 1 | | X | | Output Loop powered, NPN output, Limit value | Software |
| 1477420000 | ACT20P-AI-AO-DC-S | 12.5 | 1 | X | X | X | X | | | X | 0...11V, 0...22mA | 1 | X | X | X | 0...11V, 0...22mA | DIP switch, Button, LED |
| Limit value monitoring | | | | | | | | | | | | | | | | | |
| 7940045760 | ACT20P-UI-2RCO-DC-S | 22.5 | 1 | X | X | X | X | X | X | X | ± 25 mA, ± 5 A DC, ± 30 V DC, ± 300 V DC, potentiometer, resistance | 1 | | | X | 2 x Limit value relay outputs | Software, Display |
| AC/DC Signal measuring transducer | | | | | | | | | | | | | | | | | |
| 1510470000 | ACT20P-CMT-10-AO-RC-S | 22.5 | 1 | | | | | | | | 0...10 A AC/DC | 1 | X | X | X | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer |
| 1510540000 | ACT20P-CMT-30-AO-RC-S | 22.5 | 1 | | | | | | | | 0... 30 A AC/DC | 1 | X | X | X | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer |
| 1510440000 | ACT20P-CMT-60-AO-RC-S | 22.5 | 1 | | | | | | | | 0... 60 A AC/DC | 1 | X | X | X | ± 10 V, ± 20 mA, Limit value relays | DIP switch, potentiometer |



Reliable connection

Individually configurable protection against mismatching with release lever



High level of galvanic isolation

The galvanic isolation of 2 kV (300 V rated voltage) ensures high process reliability



Simple signal conditioning

Devices configured for converting standard sensor signals to standard DC signals.

| Auxiliary power | Rated voltage (V) | Isolation | Connection system | Special characteristics |
|--------------------|-------------------|-----------|-------------------|--------------------------------|
| 24 V DC | 300 | 3-way | S | HART®-transparent |
| 24 V DC | 300 | 3-way | S | HART®-transparent |
| 24 V DC | 300 | 3-way | S | HART®-transparent |
| 10...60 V DC | 300 | 3-way | S | |
| 24 V - 230 V AC/DC | 600 | 3-way | S | aktiv or passiv output |
| output loop | 300 | 3-way | S | Output Loop powered |
| 12...60 V DC | 300 | 3-way | S | |
| 9...60 V DC | 300 | 3-way | S | |
| 24 V DC | 300 | 3-way | S | Through hole current converter |
| 24 V DC | 300 | 3-way | S | Through hole current converter |
| 24 V DC | 300 | 3-way | S | Through hole current converter |



Universal measurement converter



Signal splitter



Signal converter



Limit value monitoring



Measuring transducer


High process reliability

Thanks to the high level of galvanic isolation amounting to 4 kV (600 V rated voltage), secure operation is guaranteed.

4 kV

Flexible supply

The wide supply range from 24 V UC to 230 V UC opens up a diverse range of applications for the ACT20P Pro DCDC II.

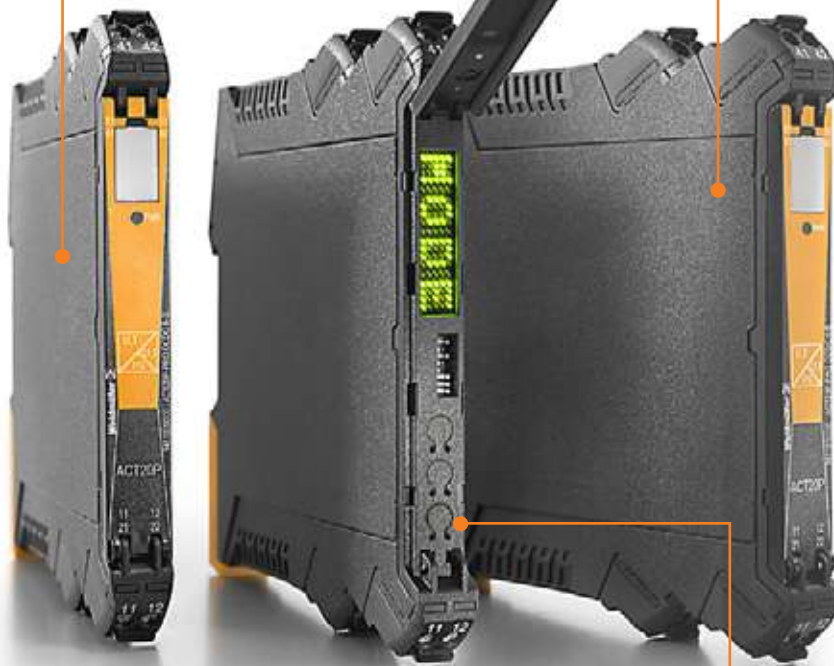


Precise data recording

Measurement data is converted and transmitted with an accuracy level of 0.05 %.

Universal solution


Due to the multitude of adjustable measurement ranges from ± 300 V DC or ± 100 mA DC, the input range can be deployed in an extremely broad spectrum of applications.



Universal DC isolation amplifier

- Universally configurable input and output for voltage/ current
- Active or passive output
- Universal voltage supply 24..230 V AC/DC
- 3-way isolation
- Convenient configuration on the device with DIP switches or by means of clear-text display + buttons, without reference source.

ACT20P-PRO DCDC II-S

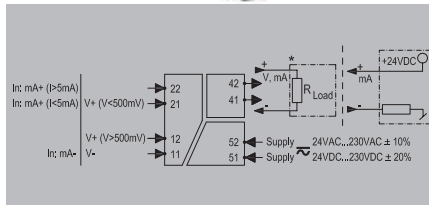

Technical data

Input

Input voltage
 Input current
 Input resistance, current
 Input resistance, voltage

Output

Output voltage
 Output current
 load impedance voltage
 load impedance current
 Offset voltage
 Cut-off frequency (-3 dB)

General data

Galvanic isolation
 Accuracy
 Temperature coefficient
 Configuration
 Power consumption
 Step response time
 Supply voltage

Insulation coordination

Rated voltage
 Standards
 Insulation voltage
 Impulse withstand voltage
 Pollution degree
 Overvoltage category

| |
|--|
| configurable, ±20 mV...±300 V |
| configurable, ± 0.1mA...± 100 mA |
| < 5 mA: approx. 100 Ω; >5 mA: approx. 5 Ω |
| approx. 1 MΩ |
| adjustable, 0...±10 V |
| adjustable, 0...±20 mA |
| ≥ 1 kΩ |
| ≤ 600 Ω |
| < 10 mV |
| > 10 kHz/ < 10 Hz |
| 3-way isolator, between input/output/supply/relay |
| < 0.05 % of measuring range |
| ≤0,01% des Messbereichs°C |
| DIP switch, or via display and push-buttons |
| ≤2.3 W |
| ≤50 ms, ≤50 μs |
| 24...230 V DC ±20 %, 24...230 V AC ±10 % @ 48...62 Hz |
| 600 V |
| EN 60079-0, EN 60079-15, EN 61010-1:2011, EN 61140, EN 61326-1, UL 61010-1, SN29500 for MTBF |
| 4 kV _{eff} , input/output/power supply |
| 5 kV (1.2/50 μs) |
| 2 |
| II |

Dimensions

Clamping range (nominal / min. / max.)
 Length x width x height

Note

Screw connection

2.5 / 0.5 / 2.5
 / 12.5 / 117.2

Ordering data

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20P-PRO DCDC II-S | 1 | 1481970000 |

Note

Accessories

Note

All-purpose inputs combined with output loop supply

ACT20 signal converters are equipped for diverse applications

When it comes to recording analogue measured values, compliance with safety regulations and maximum precision are basic prerequisites for industrial plants. Basic security functions, such as switching units on and off, monitoring actuators or controlling temperature and pressure, require the support of high-precision signal converters.

With our ACT20X and ACT20P products, we are providing you with universal devices that will reliably isolate and convert signals from intrinsically safe or safe zones. Thanks to the integrated output current loop, the modules do not require any additional external power supply and can also be easily used in remote control boxes. Integrated in an enclosure that measures a mere 12.5 mm wide, the signal converters take up very little space on the DIN rail.

The latest addition to our ACT20X series is characterised by high precision and compliance with all the safety requirements for use in Ex zones 0, 1 and 2. Also, the ACT20P ITX+ offers extended input properties, such as measurement of ± 300 V AC/DC voltages and currents of up to ± 5 A DC. It even features a digital output for indicating limit values.



The great advantage of a signal converter in applications involving direct, on-site recording of measured values from temperature and pressure sensors is that it can be used independently of the power supply

Your special advantages:


Predestined for field use

The combination of all-purpose input and output loop supply makes the ACT20X a unique product solution for the process industry and plant manufacture. But the advantages of this solution really do come into their own especially when the device is used e.g. in remote cabinets in the mining industry – both above and below ground – or in overburden materials handling.

Universal converter with digital output

- Independent of external supply thanks to output loop-powered supply
- All-purpose usage thanks to versatile input functions
- Simple software configuration
- Digital output for versatile limit value setting

ACT20P-UI-A0-DO-LP-S

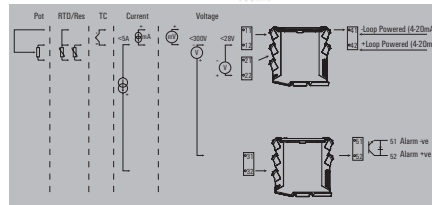

Technical data

Input

Sensor

Input voltage

Input current

Potentiometer

Output

Type

Output current

load impedance current

Output (digital)

Type

Rated switching voltage

Rated switching current

General data

Galvanic isolation

Accuracy

Configuration

Step response time

Supply voltage

Insulation coordination

Rated voltage

Standards

Insulation voltage

Impulse withstand voltage

Pollution degree

Overvoltage category

PT100 / 2-/3-/4-wire, PT1000/2-/3-/4-wire, PT200, N120, Thermocouples: B, E, J, K, L, N, R, S, T, U, Potentiometer

configurable, ± 300 V DC (min. measurement range 100 V), 0...300 V AC (min. measurement range 100 V)

configurable, ± 5 A DC (min. measurement range 0.5 A)

1.2...500 kΩ

Output-loop powered

4...20 mA, 20...4 mA, Current loop

typ. 700 Ω @ 24 V DC

Transistor, open collector

≤ 30 V DC

20 mA

2-way isolator, between input/output

< 0.1 % of measuring range

With FDT/DTM software

450 ms

Output loop powered, (10...45 V)

300 V_{eff}

DIN EN 61326-1, DIN EN 61010-1

3.51 kV between input and output

4 kV (1.2/50 μs)

2

III

Dimensions

Clamping range (nominal / min. / max.)

Depth / Width / Height

Note

Screw connection

2.5 / 0.5 / 2.5

113.6 / 12.5 / 119.2 mm

Ordering data

| Type | Qty. | Order No. |
|----------------------|------|------------|
| ACT20P-UI-A0-DO-LP-S | 1 | 1453210000 |

Note

CBX200 USB configuration adapter - 8978580000

Accessories

Note


Simple operation

The intuitive connection system with release levers makes it easier to maintain the device and to detach lines.



Versatile application options

The ACT20P-WavePak functions over a large temperature range and can be used reliably in an extremely wide range of application areas.



High process reliability


The high level of galvanic isolation of 4 kV at 300 V rated voltage guarantees safe operation.



Signal converter

- Isolation and conversion of DC signals
- 24 V - sensor supply
- Configuration via DIP switch/button
- Supply 12-60 V DC
- 3-way isolation

ACT20P-AI-AO-DC-S

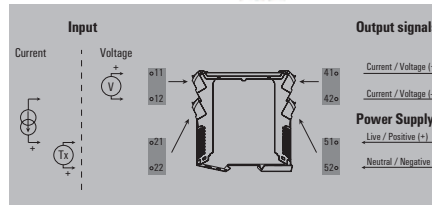

Technical data

| | |
|--------------------------------|--|
| Input | |
| Input voltage | configurable, 0...11 V (min. measurement range 2V) |
| Input current | configurable, 0...22 mA (min. measurement range 4 mA) |
| Input resistance, current | 100 Ω |
| Input resistance, voltage | ≥ 1 MΩ |
| Sensor supply | 24 V DC |
| Output | |
| Output voltage | adjustable, 0...11 V, min. output range 2V |
| Output current | adjustable, 0...22 mA, min. output range 4 mA |
| load impedance voltage | ≥ 500 kΩ |
| load impedance current | ≤ 1 kΩ |
| Offset voltage | ≤ 20 mV |
| General data | |
| Galvanic isolation | 3-way isolator, between input/output/supply |
| Linearity | < ± 0.1 % of signal range, Typ. ± 0.05 % of signal range |
| Temperature coefficient | < 0.05 % / °C |
| Configuration | DIP switch, Keys and LED display |
| Step response time | 350 ms |
| Supply voltage | 12...60 V DC |
| Insulation coordination | |
| Standards | IEC 61326-1:2012, UL 61010-1:2012, 3rd Edition |
| EMC standards | IEC 61326-1 |
| Insulation voltage | 2 kV inputs / outputs |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Overvoltage category | III |

| | |
|--|-------------------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 1.5 / 1 / 2.5 |
| Depth / Height / Width | 113.7 / 117.2 / 12.5 mm |
| Note | |

| | |
|------------------------------------|-------------------------|
| Screw connection: pluggable | |
| | 1.5 / 1 / 2.5 |
| | 113.7 / 117.2 / 12.5 mm |

Ordering data

| | |
|-------------|--|
| Note | |
|-------------|--|

| Type | Qty. | Order No. |
|-------------------|------|------------|
| ACT20P-AI-AO-DC-S | 1 | 1477420000 |

Accessories


| | |
|-------------|--|
| Note | |
|-------------|--|

ACT20P – Signal splitter

Signal splitter

- Isolation and splitting of DC signals
- Passive transmitter or active current input
- 3-way isolation
- HART® - transparent

ACT20P-CI-2CO

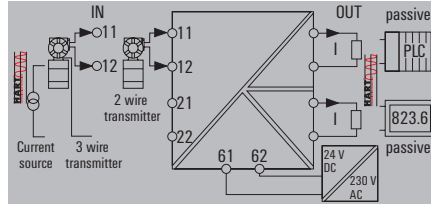

Technical data

Input

Input signal
Input current
Voltage drop, current input
Voltage drop

Output

Output current
load impedance current

General data

Configuration
Supply voltage
Accuracy
Step response time
Temperature coefficient
Ambient temperature

Insulation coordination

EMC standards
Insulation voltage
Test voltage
Impulse withstand voltage
Pollution degree
Overvoltage category

2-/3-wire transmitter, HART digital signal

0...20 mA, 4...20mA

≥ 17V @20mA

≤ 1 V

0...20 mA, 4...20 mA

< 300 Ω

none

20...30 V DC

< 0.1 % of end value

≤ 0,5 ms

80 ppm/K

EN 61010-1:2011, UL 61010-1, EN 61326-1

2 kV inputs / outputs / power supply

300 V

4 kV (1.2/50 μs)

2

III

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5

113.7 / 12.5 / 117.2

Ordering data

| Type | Qty. | Order No. |
|---------------|------|------------|
| ACT20P-CI-2CO | 1 | 7760054115 |

Note


Accessories

Note

Signal converter

- Isolation of DC signals
- Passive transmitter or active current input
- 3-way isolation
- HART® - transparent

ACT20P-CI-CO

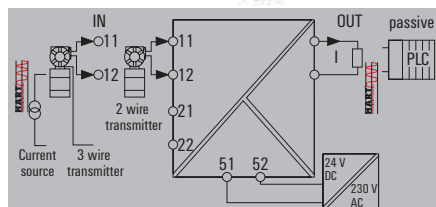

Technical data

| Input | |
|-----------------------------|--|
| Input signal | 2-/3-wire transmitter, HART digital signal |
| Input current | 0...20 mA, 4...20mA |
| Voltage drop, current input | ≥ 17V @20mA |
| Voltage drop | ≤ 1 V |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| load impedance current | ≤ 550 Ω |
| General data | |
| Configuration | none |
| Supply voltage | 20...30 V DC |
| Accuracy | < 0.1 % of end value |
| Step response time | ≤ 0,5 ms |
| Current consumption | ≤60 mA (24V power supply, 20mA output) |
| Temperature coefficient | 80 ppm/K |
| Ambient temperature | |
| Insulation coordination | |
| EMC standards | EN 61010-1:2011, UL 61010-1, EN 61326-1 |
| Insulation voltage | 2 kV inputs / outputs / power supply |
| Test voltage | 300 V |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Pollution degree | 2 |
| Overvoltage category | III |

| Dimensions | Screw connection |
|--|----------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 113.7 / 12.5 / 117.2 |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|--------------|------|------------|
| ACT20P-CI-CO | 1 | 7760054114 |

| Note | |
|------|--|
|------|--|


Accessories

| Note | |
|------|--|
|------|--|

Signal converter

- Isolation of DC signals
- Passive input
- 2 channels in one module
- 3-way isolation
- HART® - transparent

ACT20P-2CI-2CO-12

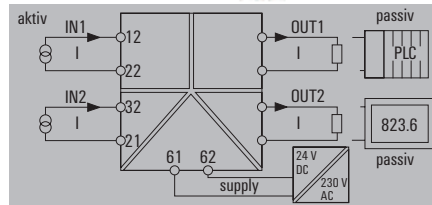

D

Technical data

| | |
|--------------------------------|---|
| Input | |
| Input current | 0...20 mA, 4...20mA |
| Voltage drop | ≤ 1 V |
| Output | |
| Output current | 0...20 mA, 4...20 mA |
| load impedance current | < 300 Ω, per channel |
| General data | |
| Configuration | none |
| Supply voltage | 20...30 V DC |
| Accuracy | < 0.1 % of end value |
| Step response time | ≤ 0,5 ms |
| Temperature coefficient | 80 ppm/K |
| Ambient temperature | |
| Insulation coordination | |
| EMC standards | EN 61010-1:2011, UL 61010-1, EN 61326-1 |
| Insulation voltage | 2 kV inputs / outputs / power supply |
| Test voltage | 300 V |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Pollution degree | 2 |
| Overvoltage category | III |

| | | |
|--|----------------------|------------|
| Dimensions | | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 | |
| Depth x width x height | 113.7 / 12.5 / 117.2 | |
| Note | | |
| Screw connection | | |
| Type | Qty. | Order No. |
| ACT20P-2CI-2CO-12 | 1 | 7760054117 |
| Note | | |
| Accessories | | |
| Note | | |

| | |
|--|----------------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 113.7 / 12.5 / 117.2 |
| Note | |

| | | |
|-------------------------|------|------------|
| Screw connection | | |
| Type | Qty. | Order No. |
| ACT20P-2CI-2CO-12 | 1 | 7760054117 |
| Note | | |

Ordering data

| | | |
|-------------------|------|------------|
| Type | Qty. | Order No. |
| ACT20P-2CI-2CO-12 | 1 | 7760054117 |

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

| | |
|-------------|--|
| Note | |
|-------------|--|

Limit monitoring with simple configuration

ACT20P identifies even the smallest deviations

Reliable monitoring of parameters such as pressure, flow and temperature plays an important role, especially for power applications and in the process industry. In this regard, individual specifications and standards define the limits to be observed for smooth process flows.

Our ACT20P trip amplifier enables a precise monitoring solution to be set up for your process signals. Easily configured via FDT/DTM software or also directly on the device, the universal module can be used in many ways. The universal input range as well as the robust design support a wide temperature range.

The trip amplifier is characterised by high reproducibility and reliability. Thanks to its wide range of alarm functions, it can identify and accurately report even the smallest deviations.



Effective control of threshold limits for the process industry - our trip amplifiers offer an especially precise solution that responds rapidly and correctly in the event of deviations

Your special advantages:


Simple configuration

Use the buttons on the 7-segment display to configure the ACT20P monitoring module extremely quickly. The manufacturer-independent FDT/DTM software also facilitates configuration.



Universal input

The universal input range covers DC currents up to 5 A and voltages up to 300 V, 2/3-wire RTD, thermocouples, resistors and potentiometers to 500 kΩ.



Numerous alarm functions

Window alarm, alarm delay, wireline break detection and hysteresis are just some of the features with which the trip amplifier provides the best conditions for each process requirement.




Configured directly at the device

A 7-segment display and LEDs support the direct configuration by push buttons and potentiometer.



High temperature stability


Thanks to the extended temperature range from -20 °C to +70 °C, the robust monitoring module can be used in any environment.



Universal limit-value monitoring

- Universally configurable input for temperature, voltage, current, potentiometer, resistance
- 2 independent relay outputs with multiple limit value functions: window alarm, upper/lower limits, hysteresis, delay, etc.
- Configuration on the device from 7-segment display or via FDT/DTM software
- External power supply 9...60 V DC

ACT20P-UI-2RCO-DC-S

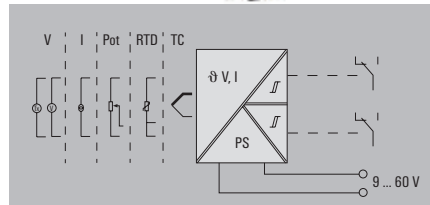

Technical data

| |
|-----------------------------------|
| Input |
| Sensor |
| Input measurement range |
| Input voltage |
| Input current |
| Output (digital) |
| Type |
| Rated switching current |
| General data |
| Galvanic isolation |
| Accuracy |
| Temperature coefficient |
| Configuration |
| Power consumption |
| Step response time |
| Supply voltage |
| Ambient temperature (operational) |
| Insulation coordination |
| Rated voltage |
| Standards |
| Insulation voltage |
| Impulse withstand voltage |
| Pollution degree |
| Overvoltage category |

| |
|---|
| Thermocouples: B, E, J, K, L, N, R, S, T, U, PT100/2-/3-wire, PT200, PT1000, N120, Cu 10, Potentiometer: 1.2 kΩ - 500 kΩ, Resistance: 0 - 1.5 kΩ, Resistance: 0 - 12 kΩ, Resistance: 0 - 750 Ω configurable, Thermocouple type J -100...+1200°C, Thermocouple type K -200...+1370°C, PT100 -200...+850 °C configurable, ±150 mV DC, ± 600mV DC, ±30 V DC, ±300 V DC configurable, ± 25 mA DC, ±5 A DC |
| 2 CO contacts |
| 200mA @ 110Vdc, 6A @ 24Vdc / 240Vac |
| 3-way isolator, Input to supply / Alarm 1 / Alarm 2 |
| < 0.05 % of measuring range |
| < 0.02 °C of measuring range / °C |
| With FDT/DTM software, or via 7-segment display, push-buttons and rotary encoder on the device itself |
| ≤ 3,5 W |
| 450 ms |
| 9...60 V DC |
| -20 °C...70 °C |
| 300 V _{eff} |
| DIN EN 61326-1, DIN EN 61010-1 |
| 3 kV |
| 3 kV (1.2/50µs) |
| 2 |
| III |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth / Width / Height |
| Note |

| |
|-------------------------|
| Screw connection |
| 2.5 / 0.5 / 2.5 |
| 113.6 / 22.5 / 117.2 |

Ordering data

| |
|-------------|
| Note |
|-------------|

| Type | Qty. | Order No. |
|---------------------|------|------------|
| ACT20P-UI-2RCO-DC-S | 1 | 7940045760 |

Accessories


| |
|-------------|
| Note |
|-------------|

| |
|---|
| CBX200 USB configuration adapter - 8978580000 |
|---|

ACT20P – Current measuring transducer


Simple and quick configuration

DIP switches and potentiometers are located on the front, which means they're quickly accessible even when installed.

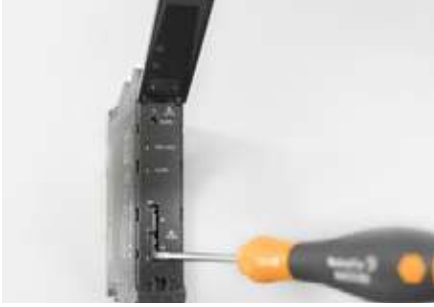

Precise measured values

The real-value effective procedure allows you to record the connected load's real power consumption, so you can reliably identify when levels exceed or fall below the nominal current.



Easy to install

The asymmetrical cable bushing makes it easier to feed through the power cable and permits precise measurement on an extremely small space.



High process reliability



Reliable function thanks to a galvanic four-way isolation and an impulse withstand voltage of 6.4 kV according to IEC 61010-2-201

6.4 kV

Current-measuring transducer

- Measuring and monitoring of AC/DC current
- Input/output electrically isolated
- Input and output ranges are adjustable
- Contact-free through-hole technology
- Relay output for limit value alarm with switching threshold, delay, hysteresis

ACT20P-CMT

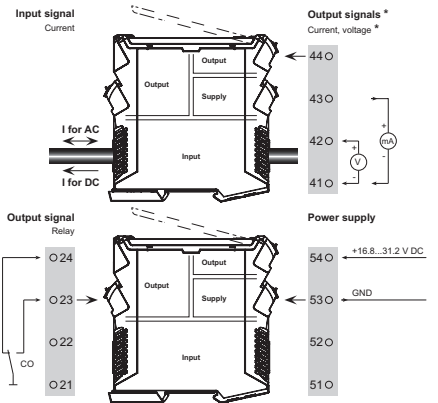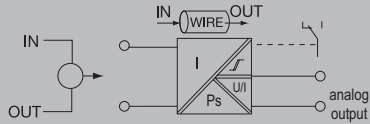

Technical data


| | |
|---|--|
| Input | |
| Input measurement range | configurable, 0...1/5/10 A AC (RMS) or DC |
| Input signal | Current-carrying cable in feed-through hole, Diameter 10.5 mm |
| Input frequency | AC: 15...700 Hz |
| Output (analogue) | |
| Output voltage [output analogue] | adjustable, 0...10 V, 2...10 V, 0...5 V, 1...5 V, -5...+5 V, -10...+10 V |
| Output current [output analogue] | adjustable, 0...20 mA, 4...20 mA, -20...+20 mA |
| Load resistance voltage [output analogue] | ≥ 10 kΩ |
| Load resistance current [output analogue] | ≤ 600 Ω |
| Output (digital) | |
| Type | Relay, 1 CO contact, Open or closed-circuit principle, with alarm delay time (configurable) 0 s / 2 s / 5 s / 10 s |
| Rated switching current | 6 A |
| Max. switching voltage, AC | 250 V |
| General data | |
| Galvanic isolation | 4-way isolator, between input/output/supply/relay |
| Accuracy | < 0.5 % of end value |
| Configuration | DIP switch and potentiometer, for thresholds (overcurrent / undercurrent), delay and hysteresis |
| Step response time | < 220 ms (10...90 %) |
| Temperature coefficient | ≤ 200 ppm/K |
| Supply voltage | 18...30 V DC |
| Insulation coordination | |
| Rated voltage | 300 V AC _{rms} |
| Standards | IEC 61010-1:2010, 3rd Edition, IEC 61010-2:2013, 1st Edition, EN 61326-1 |
| Impulse withstand voltage | 6.4 kV (1.2/50 μs) |
| Test voltage | 4 kV |
| Pollution degree | 2 |
| Overvoltage category | III |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 1,5 / 0,5 / 2,5 |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| ACT20P-CMT-10-AD-RC-S | 1 | 1510470000 |
| ACT20P-CMT-30-AD-RC-S | 1 | 1510540000 |
| ACT20P-CMT-60-AD-RC-S | 1 | 1510440000 |
| ACT20P-CMT-60-RC-S | 1 | 1510390000 |

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

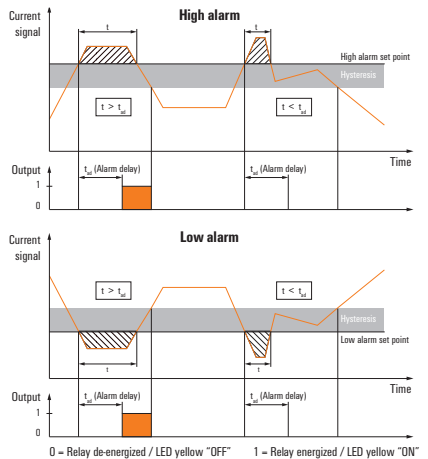

| | | | |
|-----------------------------------|-----------------|---------------------------|-----------------|
| Current input range | DIP switch S1 | Output range | DIP switch S2 |
| 0...5 A | 1 | 0...10 V | 1 |
| 0...10 A | 2 | 2...10 V | 2 |
| 0...20 A | 3 | 0...5 V | 3 |
| 0...25 A | 4 | 1...5 V | 4 |
| 0...30 A | 5 | -5...+5 V | 5 |
| 0...40 A | 6 | -10...+10 V | 6 |
| 0...50 A | 7 | 0...20 mA | 7 |
| 0...60 A | 8 | 4...20 mA | 8 |
| | | -20...+20 mA | 9 |
| Measuring method | 1 2 3 4 5 6 7 8 | Alarm relay action | 1 2 3 4 5 6 7 8 |
| True RMS | 1 | De-energized | 1 |
| Arithmetic average | 2 | De-energized | 2 |
| Alarm delay time | 1 2 3 4 5 6 7 8 | Alarm hysteresis | 1 2 3 4 5 6 7 8 |
| 0 s | 1 | 5 % | 1 |
| 2 s | 2 | 10 % | 2 |
| 5 s | 3 | | |
| 10 s | 4 | Alarm type | 1 2 3 4 5 6 7 8 |
| Measuring range monitoring | 1 2 3 4 5 6 7 8 | High alarm | 1 |
| Yes | 1 | Low alarm | 2 |
| No | 2 | | |
| Output error action | 1 2 3 4 5 6 7 8 | | |
| Upscale | 1 | | |
| Downscale | 2 | | |
| Transfer function | 1 2 3 4 5 6 7 8 | | |
| Normal | 1 | | |
| Inverse | 2 | | |

■ = ON
 1) ACT20P-CMT-10-AD-RC-S
 2) ACT20P-CMT-30-AD-RC-S
 3) ACT20P-CMT-60-AD-RC-S, ACT20P-CMT-60-RC-S

ACT20P Strain gauge transmitter

The ACT20P Bridge converts load cell/strain gauge measurement signals to standard analogue signals.

The ACT20P family offers the customer precise and functional signal converters in a compact design. The ACT20P Bridge is the first product from this new line of signal converters.

Load cells, with integral strain gauges, are used for weighing and load measurements throughout factory and process automation, in such applications as batch and recipe control, silo contents for granular products, bag weighing, engine strain measurements, and tank level.


The strain gauges, within the load cell, are film resistors in a measurement bridge network, which deform with load changes and create a varying millivolt output from the bridge. The ACT20P Bridge reads these signals and converts them to a standard signal 0(4) – 20 mA or 0 – 10 V.

The high input to output isolation provided protects the control PLC against signal line interference. A digital input representing the “empty” condition of the container (tare function) is a standard feature which zeroes the output of the ACT20P Bridge.

Features


- Adjust to load cells using push button
- Easy tare function using the integrated control input
- Intelligent pluggable connection method
The release lever simplifies maintenance and enables the connection to be unplugged without any wire damage.
- Integrated captive coding with the unique “auto-set” function





Exact measurement

The input with 6-conductor connection and very high accuracy (0.05 % of the measurement range) enables precise signal processing.



Conversion

Conversion of the bridge voltage in standardised analogue signals.



Tare calibration

Simple calibration of the empty (tare) weight can be done on-site by using the button under the front plate or with an external connection via a PLC output.



On-site calibration

Simple and reliable calibration on-site. The ACT20P Bridge is adjusted to the different load cells by means of a push button behind the hinged panel.



Protection

Protection against noise from the field. The 3-way isolation separates the input, the voltage supply and the output with 5.7 kV isolation voltage.

Strain gauge transmitter



ACT20P Bridge measuring transducer

Bridge measuring transducer for reading from load cells

General

The ACT20P Bridge is a DIN rail mounted, signal conditioner for industrial measuring bridges. It provides a precise excitation voltage for the bridge, and converts the input measurement to an isolated current/voltage signal. Bridge measuring transducers are used for various measurements like weight, force, tension, pressure, torque, and deflection.

Bridge excitation supply

Voltage sense connections are provided so that the excitation voltage can be measured at the bridge. Known as 'remote sensing' this method compensates for cabling and contact resistance errors. It is recommended for all new installations or where an upgrade is possible. Remote sensing wiring requires three twisted pairs.

TARE adjustment

The installed strain gauge is normally subjected to an initial load independent of the measurement taken. The TARE connection allows you to correct for this initial loading by operating a switch. Alternatively there is a button on the front of the unit (under the front cover) that performs the same function. Press for two seconds to correct for the initial load (the 'CAL HI' LED will light for one second).

Gauge factor

Every strain gauge has a 'gauge factor' which gives the output voltage at full-scale for a one volt excitation voltage (given in mV/V). You multiply this by the bridge excitation voltage to get the output voltage when the gauge is fully loaded. For example, a load cell with 10 V excitation and 2 mV/V gauge factor will give 20 mV when fully loaded. The meaning of a 20 mV output depends on the type of the strain gauge. If it was designed to measure 0-1000 Kg then 20 mV indicates a 1000 Kg load.

Setup


The ACT20P Bridge has internal switch settings that determine the excitation voltage (5 V or 10 V) and Input range limits. Select the appropriate settings from the table below. Once you have set the DIP switches, you simply calibrate the unit to the input and output range for your application.

Calibration

There are three options for calibrating the ACT20P Bridge:

- Kalibrierung über einen Messbrückensimulators (Bench calibrate using a bridge simulator (if you know the gauge factor)
- Calibrate on-site by loading the actual installed strain gauge
- Bench calibrates using a mV source (if you know the gauge factor).

For more information please read the manual from the web page: www.weidmueller.com

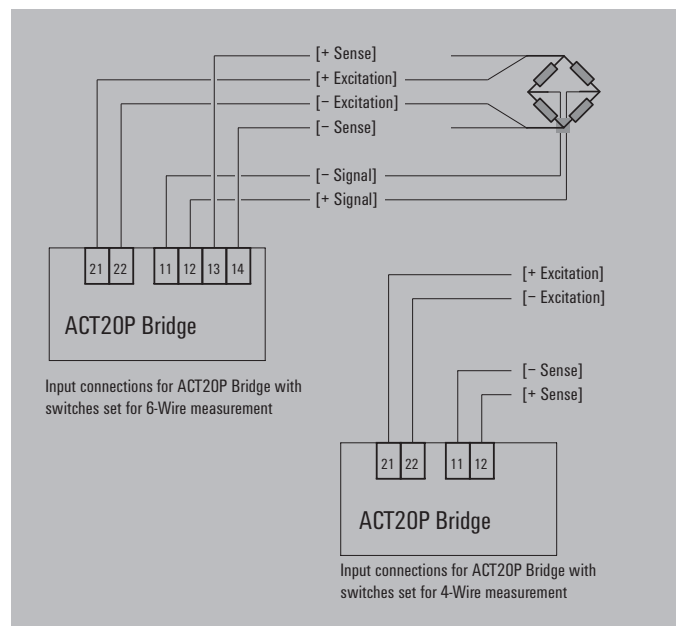


Configurable

Bridge measuring transducer for reading from load cells

- 3-way isolation
- Supply for measuring bridges up to 4 x 350 Ω
- Simple calibration of the tare weight using external switch or PLC input
- Input and output ranges adjustable via DIP switch

ACT20P-BRIDGE-S

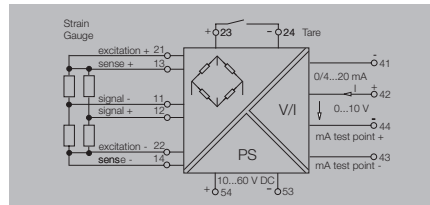

Technical data

| Input | |
|-------------------------|--|
| Type | Resistance measuring bridge |
| Bridge sensitivity | 1.0 mV / V to 5.0 mV / V |
| Input measurement range | ± 10 mV / ± 20 mV / ± 30 mV / ± 50 mV (adjustable) |
| Input resistance | > 1 MΩ |
| Sensor supply | 120 mA @ 10 V (= 4 x 350 Ω bridge resistors) |
| Bridge supply voltage | 5 V or 10 V |

| | |
|---------------------------------|--|
| Output | Voltage and current output (configurable) |
| Type | 0...11 V (adjustable) / 0...22 mA (adjustable) |
| Output voltage / Output current | 600 Ω / ≤ 600 Ω |
| Load impedance, voltage/current | |

| General data | |
|-------------------------|------------------------------------|
| Configuration | DIP switch |
| Supply voltage | 10...60 V DC |
| Power consumption | 3 W @ 24 V DC |
| Linearity | Typically ± 0.05 % of signal range |
| Repeat accuracy | ± 0.05 % of signal range |
| Humidity | 10...90 % (no condensation) |
| Temperature coefficient | typ. 0.005 % / °C |
| Long-term drift | 0.1 % / 10.000 h |
| Step response time | < 400 ms (10...90 %) |
| Ambient temperature | -40 °C...70 °C |
| Approvals | EAC, GOSTME25 |

| | |
|-------------------------|------------------------------------|
| General data | |
| Configuration | DIP switch |
| Supply voltage | 10...60 V DC |
| Power consumption | 3 W @ 24 V DC |
| Linearity | Typically ± 0.05 % of signal range |
| Repeat accuracy | ± 0.05 % of signal range |
| Humidity | 10...90 % (no condensation) |
| Temperature coefficient | typ. 0.005 % / °C |
| Long-term drift | 0.1 % / 10.000 h |
| Step response time | < 400 ms (10...90 %) |
| Ambient temperature | -40 °C...70 °C |
| Approvals | EAC, GOSTME25 |

| Insulation coordination | |
|---------------------------|---|
| Standards | DIN EN 61010-1, DIN EN 61000-4-2 |
| EMC standards | EN 61326 |
| Rated voltage | 300 V _{eff} |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Pollution degree | 2 |
| Overvoltage category | III |
| Insulation voltage | 5.7 kV (input / output, input / supply) |

| Insulation coordination | |
|---------------------------|---|
| Standards | DIN EN 61010-1, DIN EN 61000-4-2 |
| EMC standards | EN 61326 |
| Rated voltage | 300 V _{eff} |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Pollution degree | 2 |
| Overvoltage category | III |
| Insulation voltage | 5.7 kV (input / output, input / supply) |

| Dimensions | |
|--|----------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 113.6 / 22.5 / 117.2 |
| Note | |

| Screw connection | |
|--|----------------------|
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 113.6 / 22.5 / 117.2 |
| Note | |

| Ordering data | |
|---------------|-----------------|
| Type | ACT20P-BRIDGE-S |
| Qty. | 1 |
| Order No. | 1067250000 |

| Ordering data | |
|---------------|-----------------|
| Type | ACT20P-BRIDGE-S |
| Qty. | 1 |
| Order No. | 1067250000 |

| Accessories | |
|-------------|--|
| Note | |

| Accessories | |
|-------------|--|
| Note | |

Front panel DIP Switch settings

| Switch | Action if On | Action if Off |
|--------|--------------------|---------------------------|
| 1 | 10 V Excitation | 5 V Excitation |
| 2 | mA Output | Voltage Output |
| 3 | 10 mV Span | Turn off for other ranges |
| 4 | 20 mV Span | |
| 5 | 30 mV Span | |
| 6 | 50 mV Span | |
| 7 | 4-wire Measurement | 6-wire Measurement |
| 8 | | |

Connections

| Terminal | Signal | |
|----------|------------------|---------------------------|
| 11 | Signal - | Input signal |
| 12 | Signal + | |
| 13 | Sense + | Bridge Excitation Voltage |
| 14 | Sense - | |
| 21 | Excitation + | External Tare switch |
| 22 | Excitation - | |
| 23 | Tare + | Output signal |
| 24 | Tare - | |
| 41 | mA Output - | Power Supply |
| 42 | Output + | |
| 43 | mA-Test Point - | Output signal |
| 44 | Voltage Output - | |
| 44 | mA-Test Point + | Power Supply |
| 54 | + | |
| 53 | - | |

WAVESERIES – Signal converters

Isolation and conversion of analogue signals – enclosed in a rail-mounted WAVEBOX housing

WAVESERIES products are well suited for users seeking an analogue signal conversion solution. Weidmüller’s WAVESERIES integrates a wide variety of functions into a compact, space-saving design. This product line covers a broad range of products suitable for many different analogue signal conditioning applications.

- Passive isolation amplifier for standard analogue signals
- Active isolation amplifier for standard analogue signals with 2-way or 3-way isolation
- Isolating signal converters for temperature (RTDs / thermocouples), resistance, potentiometer, frequency, AC/DC currents up to 60 A, and AC voltages up to 450 V.
- Measuring transducer for measuring AC currents up to 500 A
- Signal converters for all common input signals, with configuration (either DIP switch or with software)
- Signal converters with analogue and relay outputs, fully configurable via interface and software

D



Service

No tools are required when removing the PCB from the housing. Simply push in the locking clips on the head piece and then pull out the upper section along with the connections and the PCB.

Saves time

The ZQV 2.5N cross-connector can be used to connect the housing together in order to bridge the power supply between the modules.




Security

You must ensure the presence of “protective separation” in accordance with EN50 178. The WAVESERIES products are able to fulfil these requirements completely.







Flexibility






The BLZ/ BLZF pluggable screw and tension-clamp connections offer you the best flexibility. Coding elements can be used (without loss of poles) to make sure that the wrong plug cannot be inserted.



Protection

The WAVEBOX housing is made from recyclable plastics. It is available in widths of 12.5, 17.5, 22 or 45 mm. Practically no tools are required during installation. All requirements and EMC are met. The integrated ventilation slits ensure that sufficient heat dissipation takes place.

| | |
|---|---|
|  | Universal signal converter |
|  | 3-way isolator, configurable |
|  | 3-way isolator |
|  | 2 way isolator, Output Loop Powered |
|  | Passive Isolators, Input and Output Loop Powered |
|  | Temperature transmitters |

| | |
|--|---|
|  | Frequency converters |
|  | Current monitoring |
|  | Voltage monitoring |
|  | Bridge measurement isolator/ converter |
|  | Serial interface isolation converter |

WAVE TTA – one module fits all ...

In the case of signal processing this is a big benefit. The maintenance engineer who hasn't got the right spare isolator or transmitter, and has to run part of the plant on manual control for a day or two before the replacement arrives understands this. It wastes his time and money. So Weidmüller has designed a signal processor with unique flexibility.

In one module the Wave TTA is an intelligent signal

- Isolator
- Convertor
- Transmitter
- Lineariser
- Trip-amplifier

The new WAVE TTA is a "universal" Transmitter Trip-Amplifier. It is part of Weidmüller's well-established WAVESERIES family of analogue signal conditioners, which are widely used in process and factory automation applications.

The TTA is unique. It has a combination of high performance and exceptional configurability. Designed for process industry applications, the TTA will work accurately and stably over a wide ambient temperature range, and over a wide supply voltage range, and with most types of sensor inputs. For 2-wire current transmitters 24 V DC power is provided. Alternatively the TTA can be a passive input for the current source.

Most commonly used temperature sensors and DC inputs are accepted, and the TTA also allows the user to define his own characteristics, so special sensor types and linearisation can easily be accommodated.

To help simplify installation and loop commissioning, test terminals are provided to permit input and output signal checks without removing cabling.


For linearised and/or isolated analogue outputs, the user has a choice of standard or variable DC milliamps and voltage ranges. These can be set as either direct or reverse acting. The user can also select upscale or downscale output in the event of a sensor break or an open circuit in the input.

The TTA provides 2 changeover-relay outputs which can be independently set, for use as high and low level alarms or control points.

Configuring the versatile TTA to change input and output parameters is simple, and performed from a computer via an interface (CBX200 USB).

Powering the TTA is flexible too. When the auxiliary supply is anything between 18 and 264 V (AC or DC), one module can take it.

Physically, the TTA comes in a black WAVESERIES housing with a flammability class V0 acc. UL 94, for mounting on TS 35 DIN rail. Pluggable connectors, allow screw or tension clamp wiring. A screwdriver-releasable front flap gives access to the configuration interface socket.

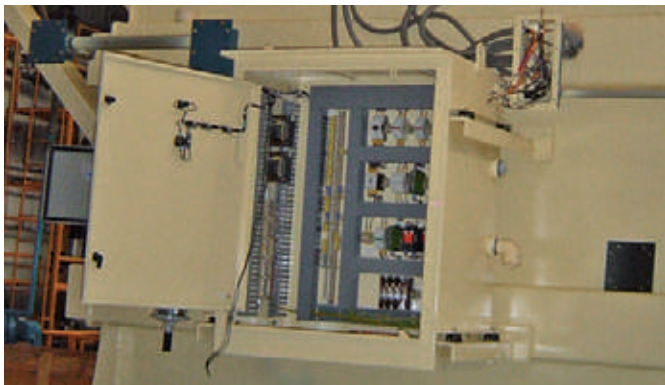



The free software TTA-Set allows fast and uncomplicated configuration of the WAVE TTA . Easily adjustable measurement window, transmit functions and switching thresholds, as well as different thresholds and alarms for faults.

Universal input signals

- Temperature signals (such as RTDs), One module integrates thermocouples and potentiometers, frequency transmitter, DC voltage signals and DC current signals.

Current source or loop powered input

- For DC current inputs the TTA can be used with either a passive input, or provide power for a two-wire transmitter.

Wide AC/DC power input (18-264 V AC/DC)

User-definable characterisation

- If none of the standard input linearisation options suit the sensor, a special curve can easily be created.

Inputs & outputs configurable via computer

- The range of configurability of the TTA is remarkable – and made easy using TTA SET software, in conjunction with the CBX200 USB interface.

Both analogue and relay outputs

- In one module the TTA integrates adjustable alarm or control outputs from mechanical relays, as well as it's proportional analogue output.

Wide ambient temperature range (-40 to 70 °C)


- Mounting the TTA outside in the field is no problem. It's ambient temperature range means it can also be field enclosure mounted.

High accuracy and temperature stability

- The Wave TTA offers superior performance and minimises losses for data acquisition systems, with its output accuracy typically < 0.1 %, and temperature stability < 0.01 %/K

Milliamp signal testing without removing cables

- The current and voltage inputs can be tested using a supplemental test contact without loosening the existing wiring.

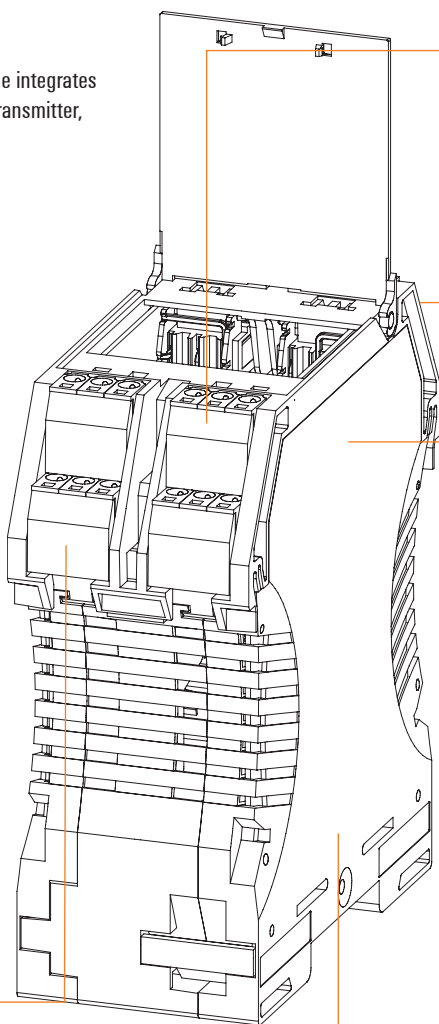


UL Class I Div.2 and ATEX Zone 2 approvals

WAVE TTA

- Input and outputs can be configured on PC with the TTA-SET software, download at www.weidmueller.com
- Universal input signals
- Loop-powered or passive input
- Pluggable connection terminals

WAS6 TTA / WAZ6 TTA

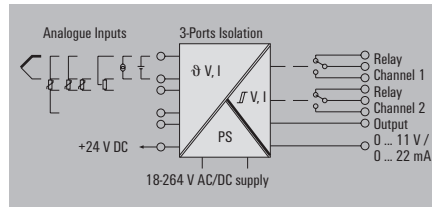


Technical data

| | |
|---|-----------------|
| Input | |
| Sensor | |
| Potentiometer | |
| Resistance | |
| Input frequency | |
| Input voltage | |
| Input current | |
| Sensor supply | |
| Output analogue | |
| Output voltage | |
| Output current | |
| Load impedance, voltage/current | |
| Signal output | |
| Transmit function | |
| Output digital | |
| Type | |
| Switching voltage AC, max. / DC, max. | |
| Continuous current | |
| General data | |
| Configuration | |
| Supply voltage | |
| Power consumption | |
| Accuracy | |
| Temperature coefficient | |
| Ambient temperature / Storage temperature | |
| Step response time | |
| Humidity | |
| Approvals | |
| Insulation coordination | |
| Standards | |
| EMC standards | |
| Rated voltage | |
| Impulse withstand voltage | |
| Pollution degree | |
| Overvoltage category | |
| Clearance & creepage distances | |
| Insulation voltage | |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|---------------------------------|
| Thermocouples: B, E, J, K, L, N, R, S, T (IEC 60584), PT100, PT1000, (EN 60571) Ni100, Ni1000, (JIS1604), Cu10, Cu25, Cu50, Cu100 (DIN 43760) 2-/3-/4-wire | |
| 100 Ω ...100 k Ω | |
| 10 Ω ...5 k Ω | |
| 2 Hz...100 kHz | |
| -200...500 mV (min. 4 mV span), -20...50 V DC (min. 0.5 V span) | |
| -20...50 mA (min. span 0.4 mA) | |
| 24 V DC / 22 mA | |
| Adjustable between -10...+10 V (min. span of 2.5 V) | |
| Adjustable between 0...20 mA (min. span of 5 mA) | |
| > 10 k Ω @ 0...10 V / > 20 k Ω @ -10...+10 V / < 700 Ω | |
| direct or inverted | |
| Linear, $x^{1/2}$, $x^{3/2}$, $x^{5/2}$ or user-defined curve (101 points) | |
| 2 x 1 C0 contact (hard gold-plated) | |
| 250 V / 30 V | |
| 3 A AC / 2 A DC | |
| TTA Set Software | |
| 18...264 V AC/DC | |
| < 3,5 W | |
| < 0.1 % span (DC, RTD); 0.2 % span (or 1 °C) + CJ failure | |
| < 0.1 % / K (DC, RTD); < 0.1 % FSR / K + CJ error 0.07 °C/K (thermocouples) | |
| / -40 °C...70 °C / -40 °C...85 °C | |
| 50 ms...1 sec (RTD, mV inputs), 110 ms...1 sec (V, mA inputs) | |
| 5...95 %, no condensation | |
| CE; cULus; EAC; GL | |
| DIN EN 50178, DIN EN 61000-4-2 | |
| EN 55011, EN 61000-6 | |
| 300 V | |
| 6 kV | |
| 2 | |
| III | |
| \geq 5.5 mm (1 mm _{Input/output}) | |
| 2.5 kV | |
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 2.5/0.5/2.5 |
| 112.4/45 | 112.4/45 |

Typical functions

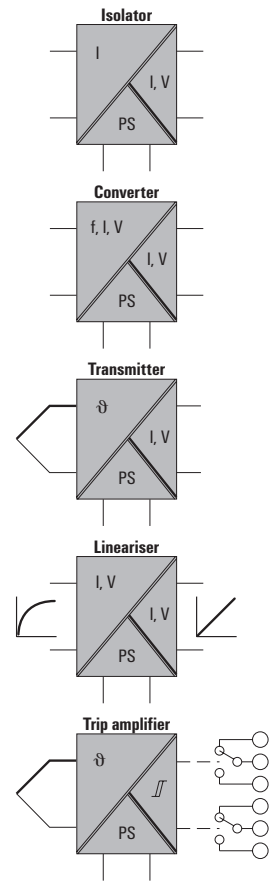

Ordering data


| Type | Qty. | Order No. |
|----------------------------|------|------------|
| Screw connection | | |
| WAS6 TTA | 1 | 8939670000 |
| Tension clamp conn. | | |
| WAZ6 TTA | 1 | 8939680000 |

CBX200 USB configuration adapter - 8978580000

WAVE TTA EX

- Input and outputs can be configured on PC with the TTA-SET software, download at www.weidmueller.com
- Universal input signals
- Loop-powered or passive input
- Pluggable connection terminals
- ATEX 3 G Ex nA IIC T4
- UL Class I, Div.2

WAS6 TTA EX / WAZ6 TTA EX

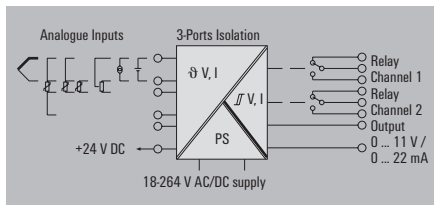


Technical data

| | |
|---|-----------------|
| Input | |
| Sensor | |
| Potentiometer | |
| Resistance | |
| Input frequency | |
| Input voltage | |
| Input current | |
| Sensor supply | |
| Output analogue | |
| Output voltage | |
| Output current | |
| Load impedance, voltage/current | |
| Signal output | |
| Transmit function | |
| Output digital | |
| Type | |
| Switching voltage AC, max. / DC, max. | |
| Continuous current | |
| General data | |
| Configuration | |
| Supply voltage | |
| Power consumption | |
| Accuracy | |
| Temperature coefficient | |
| Ambient temperature / Storage temperature | |
| Step response time | |
| Humidity | |
| Approvals | |
| Insulation coordination | |
| Standards | |
| EMC standards | |
| Rated voltage | |
| Impulse withstand voltage | |
| Pollution degree | |
| Overvoltage category | |
| Clearance & creepage distances | |
| Insulation voltage | |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|---------------------------------|
| Thermocouples: B, E, J, K, L, N, R, S, T (IEC 60584), PT100, PT1000, (EN 60571) Ni100, Ni1000, (JIS1604), Cu10, Cu25, Cu50, Cu100 (DIN 43760) 2-/3-/4-wire | |
| 100 Ω ...100 k Ω | |
| 10 Ω ...5 k Ω | |
| 2 Hz...100 kHz | |
| -200...500 mV (min. 4 mV span), -20...50 V DC (min. 0.5 V span) | |
| -20...50 mA (min. span 0.4 mA) | |
| 24 V DC / 22 mA | |
| Adjustable between -10...+10 V (min. span of 2.5 V) | |
| Adjustable between 0...20 mA (min. span of 5 mA) | |
| > 10 k Ω @ 0...10 V / > 20 k Ω @ -10...+10 V / < 700 Ω | |
| direct or inverted | |
| Linear, $x^{1/2}$, $x^{3/2}$, $x^{5/2}$ or user-defined curve (101 points) | |
| 2 x 1 C0 contact (hard gold-plated) | |
| 250 V / 30 V | |
| 2 A AC/DC | |
| TTA Set Software | |
| 24...240 V AC/DC; 24...36 V AC / 24...50 V DC (ATEX Zone 2) | |
| < 3,5 W | |
| < 0.1 % span (DC, RTD); 0.2 % span (or 1 °C) + CJ failure | |
| < 0.1 % / K (DC, RTD); < 0.1 % FSR / K + CJ error 0.07 °C/K (thermocouples) | |
| / -40 °C...70 °C / -40 °C...85 °C | |
| 50 ms...1 sec (RTD, mV inputs), 110 ms...1 sec (V, mA inputs) | |
| 5...95 %, no condensation | |
| CE; cULus; cULusEX; EAC; KEMAATEX | |
| DIN EN 50178, DIN EN 60079, DIN EN 61000-4-2 | |
| EN 55011, EN 61000-6 | |
| 300 V | |
| 6 kV | |
| 2 | |
| III | |
| \geq 5.5 mm (1 mm _{Input/output}) | |
| 2.5 kV | |
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

Typical functions

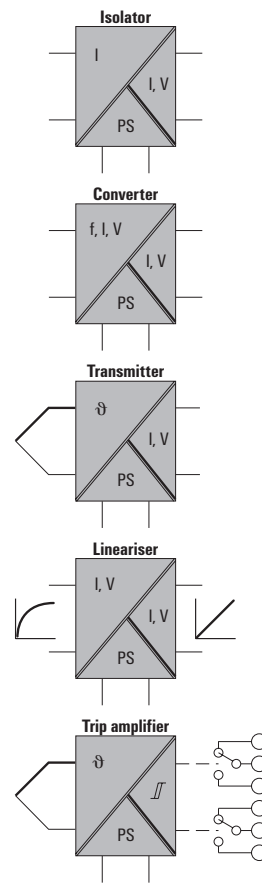


Ordering data

| Type | Qty. | Order No. |
|----------------------------|------|------------|
| Screw connection | | |
| WAS6 TTA EX | 1 | 8964310000 |
| Tension clamp conn. | | |
| WAZ6 TTA EX | 1 | 8964320000 |


CBX200 USB configuration adapter - 8978580000

20 kHz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

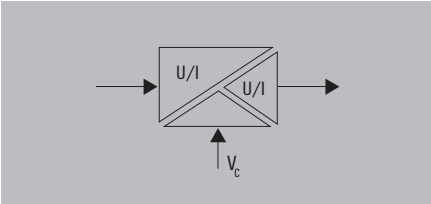

0 (4)...20 mA/0 (4)...20 mA

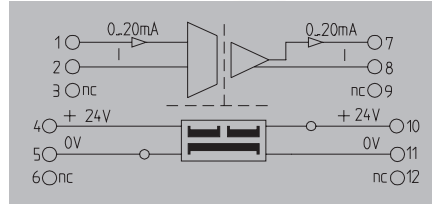

0...20 mA / 0...10 V

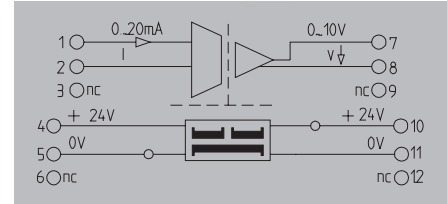

D

Technical data

| | |
|-----------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | / 0...20 mA, 4...20 mA |
| Input resistance, voltage/current | / 50 Ω |
| Output | |
| Output voltage / Output current | / 0...20 mA, 4...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | < 0.2 % of end value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|-----------------------------------|-----------------------------------|
| Input | |
| Input voltage / Input current | / 0...20 mA |
| Input resistance, voltage/current | / 50 Ω |
| Output | |
| Output voltage / Output current | 0...10 V / |
| Load impedance, voltage/current | ≥ 2 kΩ / |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.3 W @ I _{OUT} = 5 mA |
| Accuracy | < 0.2 % of end value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | | |
|--|-----------------|------------|
| Dimensions | | |
| Clamping range (nominal / min. / max.) | mm ² | |
| Depth x width x height | mm | |
| Note | | |
| Ordering data | | |
| Type | Qty. | Order No. |
| WAS5 CCC HF 0-20/0-20mA | 1 | 8447160000 |
| WAZ5 CCC HF 0-20/0-20mA | 1 | 8447170000 |
| Note | | |
| Accessories | | |
| Note | | |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | | | |
|-------------------------|-------------|---------------------------------|-------------|
| Screw connection | | Tension clamp connection | |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 | 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 | 112.4/17.5 | 112.4/17.5 |

| | | |
|-------------------------|-------------|-------------|
| Screw connection | | |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 | 2.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 | 112.4/17.5 |

| | | |
|-------------------------|------|------------|
| Ordering data | | |
| Type | Qty. | Order No. |
| WAS5 CCC HF 0-20/0-20mA | 1 | 8447160000 |
| WAZ5 CCC HF 0-20/0-20mA | 1 | 8447170000 |

| | | |
|------------------------|------|------------|
| Type | Qty. | Order No. |
| WAS5 CVC HF 0-20/0-10V | 1 | 8447220000 |

Note

Note


Accessories
Note

Cross-connector for power supplies and markers - refer to Accessories


Cross-connector for power supplies and markers - refer to Accessories

20 kHz limiting frequency

- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

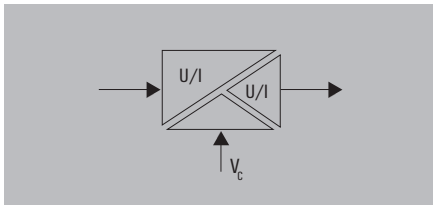


4...20 mA / 0...20 mA

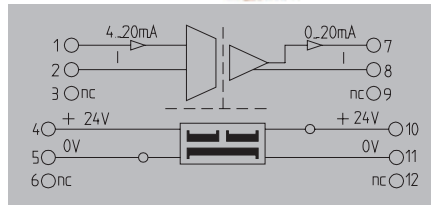

4...20 mA / 0...10 V

UL Class I, Div. 2

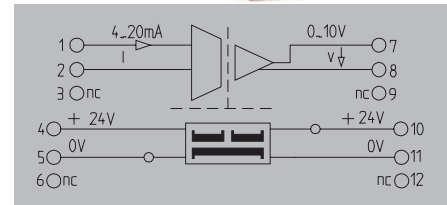

Technical data

| | |
|-----------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Input resistance, voltage/current | / 50 Ω |
| Output | |
| Output voltage / Output current | / 0...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | < 0.2 % of end value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|-----------------------------------|-----------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Input resistance, voltage/current | / 50 Ω |
| Output | |
| Output voltage / Output current | / 0...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.3 W @ I _{OUT} = 5 mA |
| Accuracy | < 0.2 % of end value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, cULusEX, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|-----------------------------------|-----------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Input resistance, voltage/current | / 50 Ω |
| Output | |
| Output voltage / Output current | 0...10 V / |
| Load impedance, voltage/current | ≥ 2 kΩ / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.3 W @ I _{OUT} = 5 mA |
| Accuracy | < 0.2 % of end value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, cULusEX, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS5 CCC HF 4-20/0-20MA | 1 | 8447250000 |

| Type | Qty. | Order No. |
|------------------------|------|------------|
| WAS5 CVC HF 4-20/0-10V | 1 | 8447280000 |

Accessories


| |
|-------------|
| Note |
|-------------|

| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|


| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|

20 kHz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

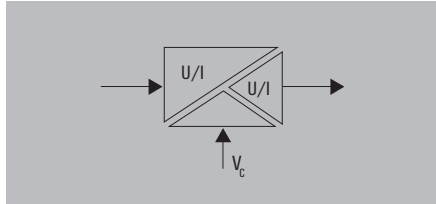

0...10 V / 0...20 mA

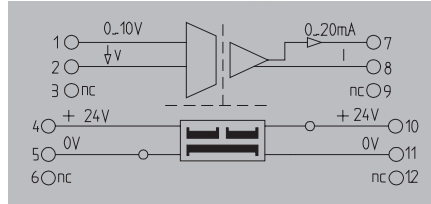

0...10 V / 4...20 mA

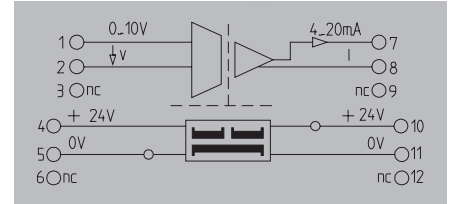

UL Class I, Div. 2

Technical data

| | |
|-----------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | 0...10 V / |
| Input resistance, voltage/current | 500 kΩ / |
| Output | |
| Output voltage / Output current | / 0...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | ± 0.2 % of final value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|-----------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | 0...10 V / |
| Input resistance, voltage/current | 500 kΩ / |
| Output | |
| Output voltage / Output current | / 4...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | ± 0.2 % of final value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|-----------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | 0...10 V / |
| Input resistance, voltage/current | 500 kΩ / |
| Output | |
| Output voltage / Output current | / 4...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 kHz (typ. 20 kHz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | ± 0.2 % of final value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 40 μs (typ. 30 μs) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, cULusEX, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS5 VCC HF 0-10/0-20MA | 1 | 8447310000 |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS5 VCC HF 0-10/4-20MA | 1 | 8447340000 |

Accessories


| |
|-------------|
| Note |
|-------------|

| |
|---|
| Cross-connector for power supplies and markers – refer to Accessories |
|---|


| |
|---|
| Cross-connector for power supplies and markers – refer to Accessories |
|---|

20 kHz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

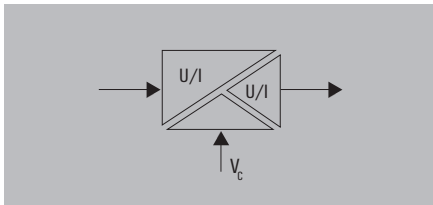

0...10 V / 0...10 V

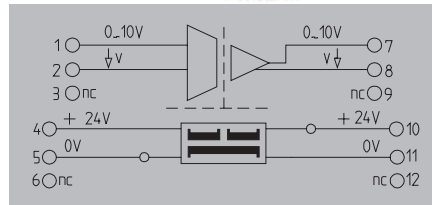

-10 V...+10 V / -10 V...+10 V

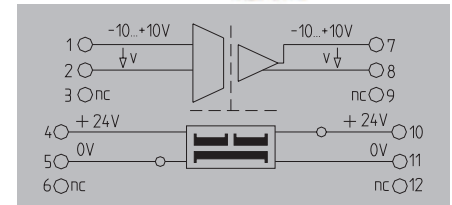

Technical data

| Input | |
|-----------------------------------|--|
| Input voltage / Input current | |
| Input resistance, voltage/current | |
| Output | |
| Output voltage / Output current | |
| Load impedance, voltage/current | |
| Cut-off frequency (-3 dB) | |
| General data | |
| Configuration | |
| Supply voltage | |
| Power consumption | |
| Accuracy | |
| Temperature coefficient | |
| Step response time | |
| Ambient temperature | |
| Approvals | |
| Insulation coordination | |
| Standards | |
| EMC standards | |
| Rated voltage | |
| Impulse withstand voltage | |
| Insulation voltage | |
| Overvoltage category | |
| Pollution degree | |
| Clearance & creepage distances | |

| |
|-----------------------------------|
| 0...10 V / |
| 500 kΩ / |
| 0...10 V / |
| ≥ 2 kΩ / |
| ≥ 15 kHz (typ. 20 kHz) |
| none |
| 24 V DC ± 25 % |
| < 1.3 W @ I _{OUT} = 5 mA |
| ± 0.2 % of final value |
| ≤ 250 ppm/K of final value |
| ≤ 40 μs (typ. 30 μs) |
| 0 °C...55 °C |
| CE, CSA, cULus, EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |
| 300 V |
| 4 kV |
| 1.2 kV _{eff} / 5 s |
| III |
| 2 |
| ≥ 3 mm |

| |
|-----------------------------------|
| -10...+10 V / |
| 500 kΩ / |
| -10...+10 V / |
| ≥ 2 kΩ / |
| ≥ 15 kHz (typ. 20 kHz) |
| none |
| 24 V DC ± 25 % |
| < 1.3 W @ I _{OUT} = 5 mA |
| ± 0.2 % of measuring range |
| ≤ 250 ppm/K of measuring range |
| ≤ 40 μs (typ. 30 μs) |
| 0 °C...55 °C |
| CE, cULus, EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |
| 300 V |
| 4 kV |
| 1.2 kV _{eff} / 5 s |
| III |
| 2 |
| ≥ 3 mm |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| Screw connection | Tension clamp connection |
|------------------|--------------------------|
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

| Screw connection | |
|------------------|--|
| 2.5/0.5/2.5 | |
| 112.4/17.5 | |

Ordering data

| | |
|--|--------------------------|
| | Screw connection |
| | Tension-clamp connection |

| Type | Qty. | Order No. |
|------------------------|------|------------|
| WAS5 VVC HF 0-10/0-10V | 1 | 8447370000 |
| WAZ5 VVC HF 0-10/0-10V | 1 | 8447380000 |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| WAS5 VVC HF ±10V/±10V | 1 | 8561610000 |

| Note |
|------|
|------|

| Note |
|------|
|------|

Accessories


| Note |
|------|
|------|

| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|


| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|

10 Hz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

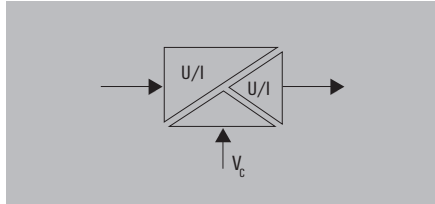

0(4)...20 mA / 0(4)...20 mA

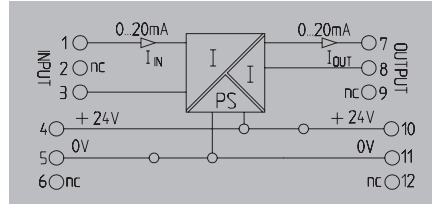

0...20 mA / 4...20 mA

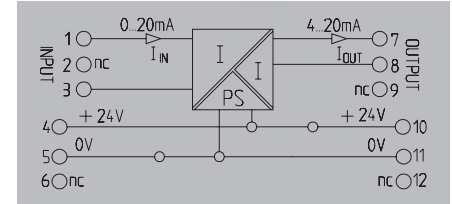

Technical data

| | |
|---------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | / 0...20 mA, 4...20 mA |
| Output | |
| Output voltage / Output current | / 0...20 mA, 4...20 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|---------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | / 0...20 mA, 4...20 mA |
| Output | |
| Output voltage / Output current | / 0...20 mA, 4...20 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|---------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | / 0...20 mA |
| Output | |
| Output voltage / Output current | / 4...20 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | | | |
|--|-----------------|--|-----------------|
| Screw connection | | Tension clamp connection | |
| Clamping range (nominal / min. / max.) | mm ² | Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm | Depth x width x height | mm |
| Note | | Note | |

| | |
|--|-----------------|
| Screw connection | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|----------------------|------|------------|
| WAS5 CCC 0-20/0-20mA | 1 | 8540180000 |
| WAZ5 CCC 0-20/0-20mA | 1 | 8540190000 |

| Type | Qty. | Order No. |
|----------------------|------|------------|
| WAS5 CCC 0-20/4-20mA | 1 | 8540250000 |

Accessories

| |
|-------------|
| Note |
|-------------|



| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

10 Hz limiting frequency

- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

0...20 mA / 0...10 V

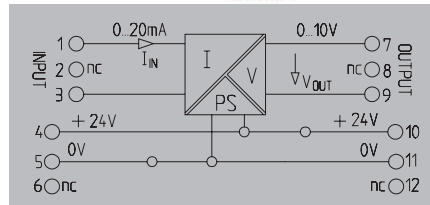

Technical data

| Input | |
|---------------------------------|--|
| Input voltage / Input current | / 0...20 mA |
| Output | |
| Output voltage / Output current | 0...10 V / |
| Load impedance, voltage/current | $\geq 1 \text{ k}\Omega /$ |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC $\pm 25 \%$ |
| Power consumption | $< 1.3 \text{ W @ } I_{\text{OUT}} = 5 \text{ mA}$ |
| Accuracy | 0.2 % |
| Temperature coefficient | $\pm 250 \text{ ppm/K}$ |
| Step response time | $\leq 45 \text{ ms}$ |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | $\geq 3 \text{ mm}$ |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |
| | |
| Screw connection | |
| 2,5/0,5/2,5 | |
| 112,4/17,5 | |
| Note | |
| | |

Dimensions

| | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |

Screw connection

| | |
|-------------|--|
| 2,5/0,5/2,5 | |
| 112,4/17,5 | |

Ordering data

Screw connection
Tension-clamp connection

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| WAS5 CVC 0-20mA/0-10V | 1 | 8540270000 |


Note

Accessories


Note Cross-connectors for power supplies and markers: refer to accessories

10 Hz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

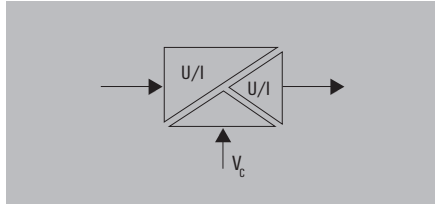

4...20 mA / 0...20 mA

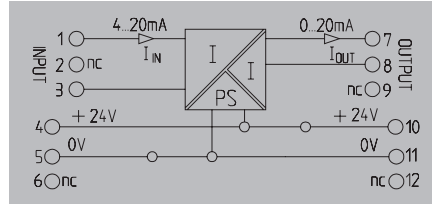

4...20 mA / 0...10 V

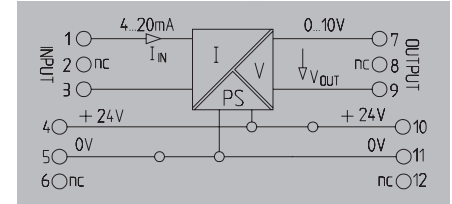

Technical data

| | |
|---|------------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Output | |
| Output voltage / Output current | / 0...20 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|------------------------------------|
| | |
| | / 4...20 mA |
| | |
| | / 0...20 mA |
| | / ≤ 600 Ω |
| | 10 Hz |
| | |
| | none |
| | 24 V DC ± 25 % |
| | < 1.5 W @ I _{OUT} = 20 mA |
| | ≤ 2 A |
| | 0.2 % |
| | ± 250 ppm/K |
| | ≤ 45 ms |
| | 0 °C...55 °C |
| | CE; cULus; EAC |
| | |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|-----------------------------------|
| | |
| | / 4...20 mA |
| | |
| | 0...10 V / |
| | ≥ 1 kΩ / |
| | 10 Hz |
| | |
| | none |
| | 24 V DC ± 25 % |
| | < 1.3 W @ I _{OUT} = 5 mA |
| | ≤ 2 A |
| | 0.2 % |
| | ± 250 ppm/K |
| | ≤ 45 ms |
| | 0 °C...55 °C |
| | CE; cULus; EAC |
| | |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Depth x width x height | 112.4 / 17.5 / |
| Note | |

| | |
|-------------------------|-----------------|
| Screw connection | |
| | 2.5 / 0.5 / 2.5 |
| | 112.4 / 17.5 / |
| Note | |

| | |
|-------------------------|-----------------|
| Screw connection | |
| | 2.5 / 0.5 / 2.5 |
| | 112.4 / 17.5 / |
| Note | |

Ordering data

| | |
|--|------------------|
| | Screw connection |
|--|------------------|

| Type | Qty. | Order No. |
|----------------------|------|-----------|
| WAS5 CCC 4-20/0-20MA | 1 | 854020000 |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| WAS5 CVC 4-20mA/0-10V | 1 | 8540230000 |

| | |
|-------------|--|
| Note | |
|-------------|--|

| | |
|-------------|--|
| Note | |
|-------------|--|

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories


| | |
|-------------|--|
| Note | |
|-------------|--|

| | |
|--|---|
| | Cross-connectors for power supplies and markers: refer to accessories |
|--|---|


| | |
|--|---|
| | Cross-connectors for power supplies and markers: refer to accessories |
|--|---|

10 Hz limiting frequency


- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

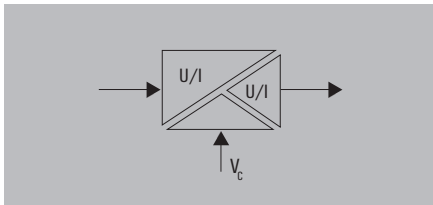

0...10 V / 0...20 mA

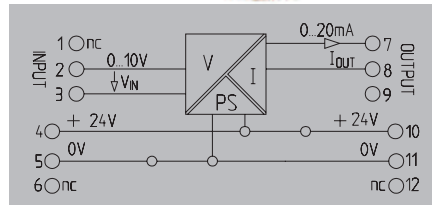

0...10 V / 4...20 mA

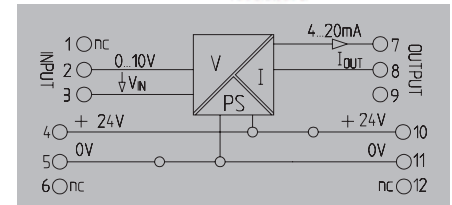

Technical data

| | |
|---------------------------------|------------------------------------|
| Input | |
| Input voltage / Input current | 0...10 V / |
| Output | |
| Output voltage / Output current | / 0...20 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.5 W @ I _{OUT} = 20 mA |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|------------------------------------|
| | |
| | 0...10 V / |
| | / 0...20 mA |
| | / ≤ 600 Ω |
| | 10 Hz |
| | none |
| | 24 V DC ± 25 % |
| | < 1.5 W @ I _{OUT} = 20 mA |
| | 0.2 % |
| | ± 250 ppm/K |
| | ≤ 45 ms |
| | 0 °C...55 °C |
| | CE; cULus; EAC |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|------------------------------------|
| | |
| | 0...10 V / |
| | / 4...20 mA |
| | / ≤ 600 Ω |
| | 10 Hz |
| | none |
| | 24 V DC ± 25 % |
| | < 1.5 W @ I _{OUT} = 20 mA |
| | 0.2 % |
| | ± 250 ppm/K |
| | ≤ 45 ms |
| | 0 °C...55 °C |
| | CE; cULus; EAC |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

Ordering data

| | |
|--|--------------------------|
| | Screw connection |
| | Tension-clamp connection |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| WAS5 VCC 0-10V/0-20MA | 1 | 8540310000 |
| WAZ5 VCC 0-10V/0-20MA | 1 | 8540320000 |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| WAS5 VCC 0-10V/4-20MA | 1 | 8540290000 |
| WAZ5 VCC 0-10V/4-20MA | 1 | 8540300000 |

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|



| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

10 Hz limiting frequency

- Signal conversion
- Galvanic isolation between input/output signals and power supply
- Power supply can be cross-connected using plug-in jumpers

0...10 V / 0...10 V

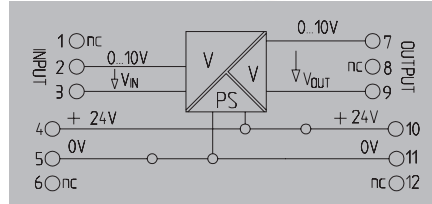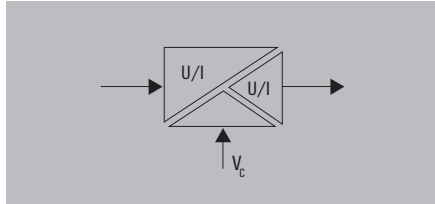

Technical data

| | |
|---|-----------------------------------|
| Input | |
| Input voltage / Input current | 0...10 V / |
| Output | |
| Output voltage / Output current | 0...10 V / |
| Load impedance, voltage/current | ≥ 1 kΩ / |
| Cut-off frequency (-3 dB) | 10 Hz |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | < 1.3 W @ I _{OUT} = 5 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Accuracy | 0.2 % |
| Temperature coefficient | ± 250 ppm/K |
| Step response time | ≤ 45 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage input or output/supply | 2 kV _{em} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|-----------------------------------|
| | 0...10 V / |
| | 0...10 V / |
| | ≥ 1 kΩ / |
| | 10 Hz |
| | none |
| | 24 V DC ± 25 % |
| | < 1.3 W @ I _{OUT} = 5 mA |
| | ≤ 2 A |
| | 0.2 % |
| | ± 250 ppm/K |
| | ≤ 45 ms |
| | 0 °C...55 °C |
| | CE, cULus, EAC |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 2 kV _{em} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

Ordering data

| | |
|--|--------------------------|
| | Screw connection |
| | Tension-clamp connection |

| | | |
|----------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WAS5 VVC 0-10V/0-10V | 1 | 8540330000 |
| WAZ5 VVC 0-10V/0-10V | 1 | 8540340000 |

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

| |
|---|
| Cross-connectors for power supplies and markers: refer to accessories |
|---|

Output-side supply




- Signal conversion
- Galvanic isolation between input and output signals
- Power supply can be cross-connected using plug-in jumpers

4...20 mA / 4...20 mA

UL Class I, Div. 2



4...20 mA / 0...20 mA

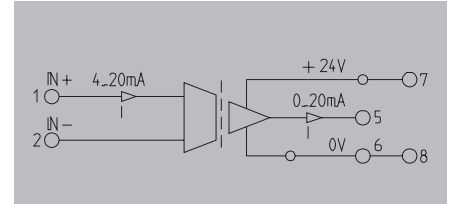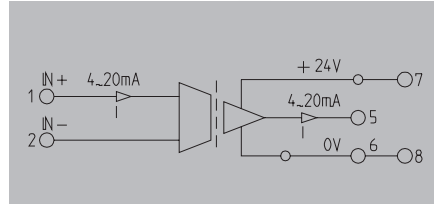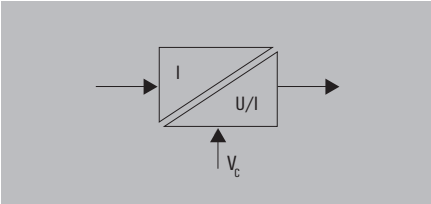

Technical data

| | |
|---|------------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Output | |
| Output voltage / Output current | / 4...20 mA |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Cut-off frequency (-3 dB) | ≥ 15 Hz (typ. 20 Hz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 20 % |
| Current consumption | < 32 mA @ I _{OUT} = 20 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Accuracy | ± 0.2 % of final value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 30 ms (typ. 20 ms) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, cULusEX, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|------------------------------------|
| | |
| | / 4...20 mA |
| | / 4...20 mA |
| | / ≤ 500 Ω |
| | ≥ 15 Hz (typ. 20 Hz) |
| | none |
| | 24 V DC ± 20 % |
| | < 32 mA @ I _{OUT} = 20 mA |
| | ≤ 2 A |
| | ± 0.2 % of final value |
| | ≤ 250 ppm/K of final value |
| | ≤ 30 ms (typ. 20 ms) |
| | 0 °C...55 °C |
| | CE, CSA, cULus, cULusEX, EAC |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 1.2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|------------------------------------|
| | |
| | / 4...20 mA |
| | / 0...20 mA |
| | / ≤ 500 Ω |
| | ≥ 15 Hz (typ. 20 Hz) |
| | none |
| | 24 V DC ± 20 % |
| | < 32 mA @ I _{OUT} = 20 mA |
| | ≤ 2 A |
| | ± 0.2 % of final value |
| | ≤ 250 ppm/K of final value |
| | ≤ 30 ms (typ. 20 ms) |
| | 0 °C...55 °C |
| | CE, CSA, cULus, EAC |
| | DIN EN 50178, DIN EN 61000-4-2 |
| | EN 55011, EN 61000-6 |
| | 300 V |
| | 4 kV |
| | 1.2 kV _{eff} / 5 s |
| | III |
| | 2 |
| | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |
| | |

| |
|-------------------------|
| Screw connection |
| 2.5/0.5/2.5 |
| 112.4/12.5 |
| |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS4 CCC DC 4-20/4-20MA | 1 | 8444980000 |
| WAZ4 CCC DC 4-20/4-20MA | 1 | 8444990000 |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS4 CCC DC 4-20/0-20MA | 1 | 8445010000 |

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|



| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|

Output-side supply

- Signal conversion
- Galvanic isolation between input and output signals
- Power supply can be cross-connected using plug-in jumpers

4...20 mA / 0...10 V

UL Class I, Div. 2

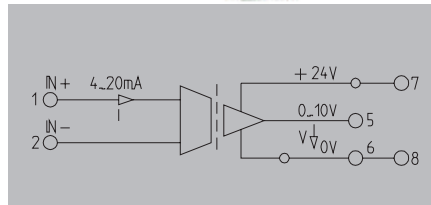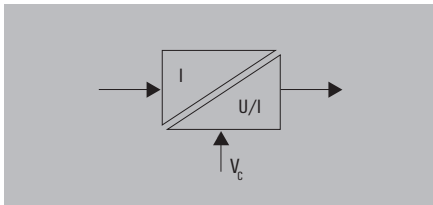

Technical data

| | |
|---|------------------------------------|
| Input | |
| Input voltage / Input current | / 4...20 mA |
| Output | |
| Output voltage / Output current | 0...10 V / |
| Load impedance, voltage/current | ≥ 1 kΩ / |
| Cut-off frequency (-3 dB) | ≥ 15 Hz (typ. 20 Hz) |
| General data | |
| Configuration | none |
| Supply voltage | 24 V DC ± 20 % |
| Current consumption | < 20 mA @ I _{OUT} = 10 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Accuracy | ± 0.2 % of final value |
| Temperature coefficient | ≤ 250 ppm/K of final value |
| Step response time | ≤ 30 ms (typ. 20 ms) |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE, CSA, cULus, cULusEX, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 1.2 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| | | |
|------------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WAS4 CVC DC 4-20/0-10V | 1 | 8445040000 |
| WAZ4 CVC DC 4-20/0-10V | 1 | 8445050000 |

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|



| |
|---|
| Cross-connector for power supplies and markers - refer to Accessories |
|---|

Signal distributor

Supplied by current loop

- Galvanic isolation
- Input and output current loop feed
- Very low power consumption
- No calibration necessary

20LP

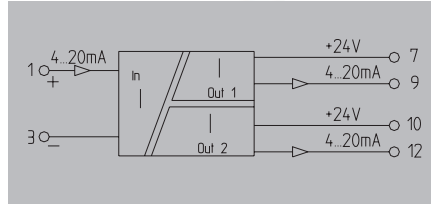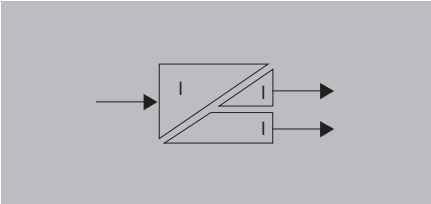


D

Technical data

| | |
|---|--|
| Input | |
| Input current | 4...20 mA (current loop) |
| Voltage drop | 3.8 V |
| Output | |
| Output current | 2 x 4...20 mA (current loop) |
| Output signal limit | Approx. 31 mA |
| Load impedance, voltage/current | / $R_L = (U_E - 12 V) / 20 \text{ mA}$ z.B. 600 Ω at 24 V |
| Cut-off frequency (-3 dB) | 30 Hz |
| General data | |
| Configuration | none |
| Supply voltage | min. 12 V DC/ max. 30 V DC |
| Accuracy | typ. 0.1 %; max. 0.2 % |
| Temperature coefficient | $\leq 150 \text{ ppm/K}$ |
| Step response time | $< 20 \text{ ms}$ |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage input or output/supply | 4 $kV_{em} / 5 \text{ s}$ |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | $\geq 5.5 \text{ mm}$ |

Example of application

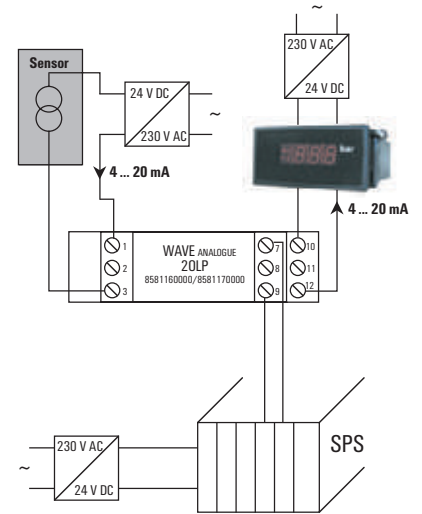

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|---------------|------|------------|
| WAS5 CCC 20LP | 1 | 8581160000 |
| WAZ5 CCC 20LP | 1 | 8581170000 |

Accessories

| |
|-------------|
| Note |
|-------------|



Markers - refer to Accessories.

Signal distributor

Supplied by current loop

- Galvanic isolation
- Input and output current loop feed
- Very low power consumption
- No calibration necessary
- ATEX II 3 G Ex nA IIC T4
- UL Class I, Div. 2

20LP

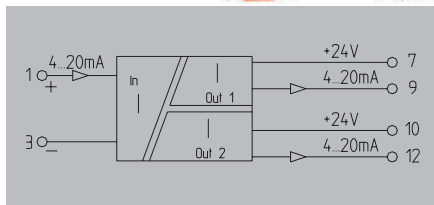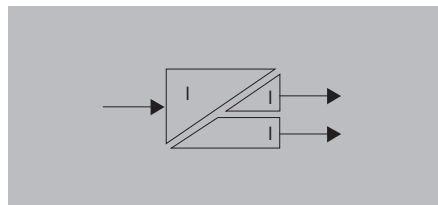

Technical data

| | |
|---|---|
| Input | |
| Input current | 4...20 mA (current loop) |
| Voltage drop | 3.8 V |
| Output | |
| Output current | 2 x 4...20 mA (current loop) |
| Output signal limit | Approx. 31 mA |
| Load impedance, voltage/current | / R _L = (U _E - 12 V) / 20 mA z.B. 600 Ω at 24 V |
| Cut-off frequency (-3 dB) | 30 Hz |
| General data | |
| Configuration | none |
| Supply voltage | min. 12 V DC/ max. 30 V DC |
| Accuracy | typ. 0.1 %; max. 0.2 % |
| Temperature coefficient | ≤ 150 ppm/K |
| Step response time | < 20 ms |
| Ambient temperature | 0 °C...55 °C |
| Approvals | CE; cULusEX; DEMKOATEX; EAC |
| Insulation coordination | |
| Standards | DIN EN 60079, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage input or output/supply | 4 kV _{em} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 5.5 mm |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |
| Ordering data | |
| Screw connection | |
| Tension-clamp connection | |
| Note | |
| Accessories | |
| Note | |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|--|
| Screw connection | |
| 2.5/0.5/2.5 | |
| 112.4/17.5 | |
| Note | |

Ordering data

| | |
|--------------------------|--|
| Screw connection | |
| Tension-clamp connection | |
| Note | |

| Type | Qty. | Order No. |
|------------------|------|------------|
| WAS5 CCC 20LP EX | 1 | 8975640000 |

| |
|-------------|
| Note |
|-------------|


Accessories

| |
|-------------|
| Note |
|-------------|

| |
|-------------|
| Note |
|-------------|

| |
|---------------------------------|
| Markers - refer to Accessories. |
|---------------------------------|



Example of application

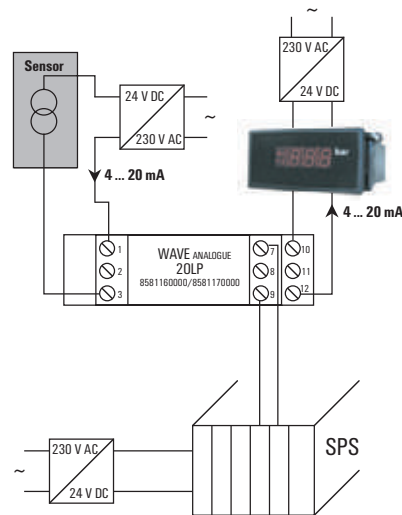

Output-current loop-powered

- Galvanic isolation
- Very low power consumption
- Input range selected via DIP switch
- No calibration necessary

O/P

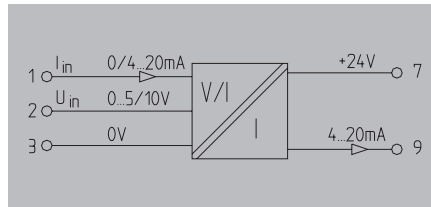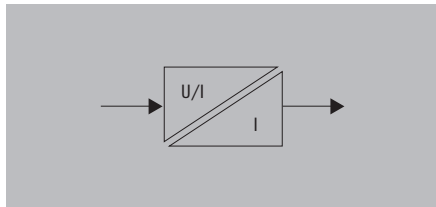

D

Technical data

| Input | |
|--|---|
| Input voltage | 0...5 V; 210 kΩ; 0...10 V: 430 kΩ / 51 Ω |
| Input resistance, voltage/current | 0...20 mA, 4...20mA |
| Input current | 40 mA |
| Rated current | |
| Output | |
| Output current | 4...20 mA (current loop) |
| Output signal limit | Approx. 31 mA |
| Load impedance, voltage/current | $R_L = (U_E - 12 V) / 20 mA$ z.B. 600 Ω at 24 V |
| Cut-off frequency (-3 dB) | 10 Hz/ 100 Hz switchable |
| General data | |
| Configuration | DIP switch |
| Supply voltage | min. 12 V DC/ max. 30 V DC, Loop powered, via 4...20 mA input |
| Ambient temperature | 0 °C...55 °C |
| Default setting | 0...20mA, 10 Hz |
| Accuracy | 0.2% of measuring range final value |
| Temperature coefficient | ≤ 150 ppm/K |
| Step response time | < 10 Hz: 80 ms; 100 Hz: 50 ms |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178, DIN EN 61000-4-2 |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Insulation voltage | 4 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 5.5 mm |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| Screw connection | | Tension clamp connection | |
|------------------|--|--------------------------|--|
| 2.5/0.5/2.5 | | 1.5/0.5/2.5 | |
| 112.4/17.5 | | 112.4/17.5 | |

Ordering data

| | Screw connection |
|------|--------------------------|
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|----------|------|------------|
| WAS5 OLP | 1 | 8543720000 |
| WAZ5 OLP | 1 | 8543730000 |

Accessories


| Note |
|------|
|------|

| |
|---------------------------------|
| Markers - refer to Accessories. |
|---------------------------------|

| Setting options/switch position | | | | |
|---------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Input | SW 1 | | | |
| | 1 | 2 | 3 | 4 |
| 0 ... 20 mA | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4 ... 20 mA | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0 ... 5 V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 0 ... 10 V | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Transmission frequency | | | | |
| 10 Hz | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 100 Hz | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |


■ = on
□ = off

Example of application

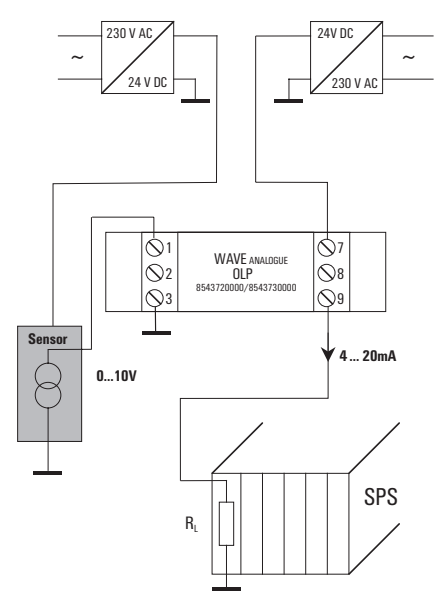


Input current loop feed

- Safe separation
- Very low power consumption
- UL Class I, Div. 2

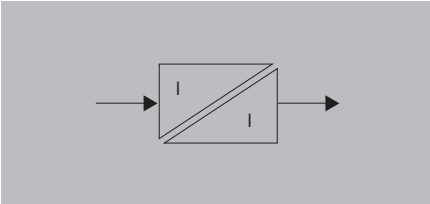


CCC LP

(1-channel)

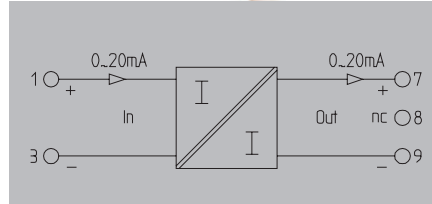

CCC LP

(2-channel)

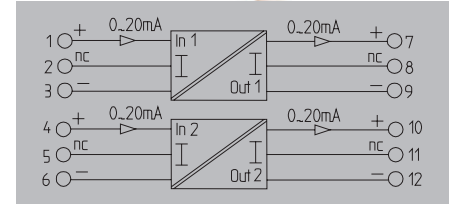

Technical data

| |
|---------------------------------|
| Input |
| Input voltage / Input current |
| Pick-up current |
| Voltage drop |
| Output |
| Output voltage / Output current |
| Load impedance, voltage/current |
| General data |
| Configuration |
| Ambient temperature |
| Accuracy |
| Temperature coefficient |
| Approvals |
| Insulation coordination |
| Standards |
| EMC standards |
| Rated voltage |
| Impulse withstand voltage |
| Insulation voltage |
| Overtoltage category |
| Pollution degree |
| Clearance & creepage distances |

| |
|---|
| / 0...20 mA current loop |
| < 100 µA |
| Approx. 3 V at $R_L = 0 \Omega$; approx. 13 V at $R_L = 500 \Omega$; ($I_{IN} = 20 \text{ mA}$) |
| / 0...20 mA, 4...20 mA |
| / $\leq 500 \Omega$ |
| none |
| -25 °C...70 °C |
| < 0.1 % of end value |
| $\leq 50 \text{ ppm/K}$ of final value |
| CE; CSA; cULus; cULusEX; EAC; GL |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |
| 300 V |
| 6 kV |
| 4 kV _{eff} / 1 s |
| III |
| 2 |
| $\geq 5.5 \text{ mm}$ |

| |
|---|
| / 0...20 mA current loop |
| < 100 µA |
| Approx. 3 V at $R_L = 0 \Omega$; approx. 13 V at $R_L = 500 \Omega$; ($I_{IN} = 20 \text{ mA}$) |
| / 0...20 mA, 4...20 mA |
| / $\leq 500 \Omega$ |
| none |
| -25 °C...70 °C |
| < 0.1 % of end value |
| $\leq 50 \text{ ppm/K}$ of final value |
| CE; CSA; cULus; cULusEX; EAC; GL |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |
| 300 V |
| 6 kV |
| 4 kV _{eff} / 1 s |
| III |
| 2 |
| $\geq 5.5 \text{ mm}$ |

| | |
|--|-----------------|
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

| | |
|-------------------------|---------------------------------|
| Screw connection | Tension clamp connection |
| 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/17.5 | 112.4/17.5 |

Ordering data

| | |
|-------------|--------------------------|
| | Screw connection |
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS5 CCC LP 0-20/0-20mA | 1 | 8444950000 |
| WAZ5 CCC LP 0-20/0-20mA | 1 | 8444960000 |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WAS5 CCC LP 0-20/0-20mA | 1 | 8463580000 |
| WAZ5 CCC LP 0-20/0-20mA | 1 | 8463590000 |

Accessories

| |
|-------------|
| Note |
|-------------|


| |
|---------------------------------|
| Markers - refer to Accessories. |
|---------------------------------|

| |
|---------------------------------|
| Markers - refer to Accessories. |
|---------------------------------|

WAVESERIES - Temperature measuring transducer


RTD signal isolator/converter

- Universally adjustable via DIP switch
- 3-way isolation
- Linearisation
- Power supply can be cross-connected using plug-in jumpers
- WAVETOOL software helps with configuration, download at www.weidmueller.com

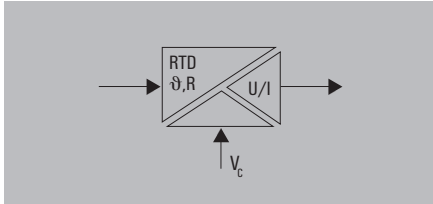

PRO RTD

UL Class I, Div. 2

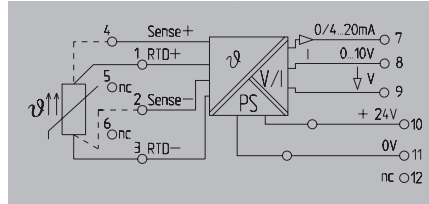

Technical data

Input

Sensor

Temperature input range

Output

Output current / Output voltage
Offset current / Offset voltage
Load impedance, voltage/current
Sensor error detection
Fine adjustment
Status indicator

General data

Configuration
Supply voltage
Power consumption
Step response time
Ambient temperature
Approvals

Insulation coordination

Standards
EMC standards
Rated voltage
Impulse withstand voltage
Insulation voltage
Overvoltage category
Pollution degree
Clearance & creepage distances

PT100/2-/3-/4-wire, Ni100/2-/3-/4-wire, potentiometer: min. 100 Ω , max. 100 k Ω , resistance: 0-450 Ω

Configurable, PT100: -200°C...850°C, NI100: -60°C...+250°C

0...20 mA, 4...20 mA / 0...10 V

max. 100 μ A / max. 0.05 V

≥ 1 k Ω / ≤ 600 Ω

LED flashing (output value: > 20 mA, >10 V)

$\geq \pm 5$ %, Version 1 and later: ≥ 12.5 % / potentiometer: 12.5%...25%

Module active: LED on/ wire breakage: LED flashing/
Error: LED off

DIP switch, Potentiometer

830...880...980mW at $I_{OUT} = 20$ mA

fast/slow: 2-/3-/4-conductor: 1.2 s/2.2 s; potentiometer: 0.5 s/1.1 s
0 °C...55 °C

CE; cULus; cULusEX; EAC; GL

DIN EN 50178, DIN EN 61000-4-2

EN 55011, EN 61000-6

300 V

4 kV

2 kV_{eff} / 5 s

III

2

≥ 3 mm

Dimensions

Clamping range (nominal / min. / max.) mm²
Depth x width x height mm

Note

Screw connection

2.5/0.5/2.5
112.4/17.5

Tension clamp connection

1.5/0.5/2.5
112.4/17.5

Ordering data

Screw connection
Tension-clamp connection

| Type | Qty. | Order No. |
|--------------|------|------------|
| WAS5 PRO RTD | 1 | 8560700000 |
| WAZ5 PRO RTD | 1 | 8560710000 |

Note

Accessories

Note

Cross-connector for power supplies and markers - refer to Accessories

PRO RTD

Switch position / setting options

| Choice of inputs | | Switch 1 | | |
|------------------|--------|----------|---|---|
| Input | | 1 | 2 | 3 |
| PT100 | 2-wire | ■ | ■ | ■ |
| PT100 | 3-wire | □ | ■ | ■ |
| PT100 | 4-wire | ■ | □ | ■ |
| R | 2-wire | □ | □ | ■ |
| NI100 | 2-wire | ■ | ■ | □ |
| NI100 | 3-wire | □ | ■ | □ |
| NI100 | 4-wire | ■ | □ | □ |
| Potentiometer | | □ | □ | □ |

■ = on
□ = off

| Choice of minimum input size | | | | Switch 1 | | | |
|------------------------------|-----------|---------------------|--|----------|---|---|---|
| R_{min} | R_{min} | Poti _{min} | | 4 | 5 | 6 | 7 |
| 0 °C | 0 Ω | 0 % | | ■ | ■ | ■ | ■ |
| -10 °C | 10 Ω | 10 % | | ■ | ■ | ■ | □ |
| -20 °C | 20 Ω | 20 % | | ■ | ■ | □ | ■ |
| -25 °C | 20 Ω | 25 % | | ■ | ■ | □ | □ |
| -30 °C | 30 Ω | 30 % | | ■ | □ | ■ | ■ |
| -40 °C | 40 Ω | 40 % | | ■ | □ | ■ | □ |
| -50 °C | 50 Ω | 50 % | | ■ | □ | □ | ■ |
| -60 °C | 60 Ω | 60 % | | ■ | □ | □ | □ |
| -70 °C | 70 Ω | 70 % | | □ | ■ | ■ | ■ |
| -80 °C | 80 Ω | 80 % | | □ | ■ | ■ | □ |
| -90 °C | 90 Ω | | | □ | ■ | □ | ■ |
| -100 °C | 100 Ω | | | □ | ■ | □ | □ |
| -150 °C | 150 Ω | | | □ | □ | ■ | ■ |
| -200 °C | 200 Ω | | | □ | □ | ■ | □ |
| Special area | | | | □ | □ | □ | ■ |

| Choice of measuring range | | | Switch 2 | | | | |
|---------------------------|--------|--------|----------|---|---|---|---|
| T | R | Poti | 1 | 2 | 3 | 4 | 5 |
| 40 K | 20 Ω | 20 % | ■ | ■ | ■ | ■ | ■ |
| 50 K | 25 Ω | 25 % | ■ | ■ | ■ | ■ | □ |
| 60 K | 30 Ω | 30 % | ■ | ■ | ■ | □ | ■ |
| 70 K | 35 Ω | 35 % | ■ | ■ | ■ | □ | □ |
| 80 K | 40 Ω | 40 % | ■ | ■ | □ | ■ | ■ |
| 90 K | 45 Ω | 45 % | ■ | ■ | □ | ■ | □ |
| 100 K | 50 Ω | 50 % | ■ | ■ | □ | □ | ■ |
| 110 K | 55 Ω | 55 % | ■ | ■ | □ | □ | □ |
| 120 K | 60 Ω | 60 % | ■ | □ | ■ | ■ | ■ |
| 125 K | 62.5 Ω | 62.5 % | ■ | □ | ■ | ■ | □ |
| 130 K | 65 Ω | 65 % | ■ | □ | ■ | □ | ■ |
| 140 K | 70 Ω | 70 % | ■ | □ | □ | ■ | □ |
| 150 K | 75 Ω | 75 % | ■ | □ | □ | ■ | ■ |
| 160 K | 80 Ω | 80 % | ■ | □ | □ | ■ | □ |
| 170 K | 85 Ω | 85 % | ■ | □ | □ | □ | ■ |
| 180 K | 90 Ω | 90 % | ■ | □ | □ | □ | □ |
| 190 K | 95 Ω | 95 % | □ | ■ | ■ | ■ | ■ |
| 200 K | 100 Ω | 100 % | □ | ■ | ■ | ■ | □ |
| 250 K | 125 Ω | - | □ | ■ | ■ | □ | ■ |
| 300 K | 150 Ω | - | □ | ■ | ■ | □ | □ |
| 350 K | 175 Ω | - | □ | ■ | □ | ■ | ■ |
| 400 K | 200 Ω | - | □ | ■ | □ | ■ | □ |
| 450 K | 225 Ω | - | □ | ■ | □ | □ | ■ |
| 500 K | 250 Ω | - | □ | ■ | □ | □ | □ |
| 550 K | 275 Ω | - | □ | □ | ■ | ■ | ■ |
| 600 K | 300 Ω | - | □ | □ | ■ | ■ | □ |
| 650 K | 325 Ω | - | □ | □ | ■ | □ | ■ |
| 700 K | 350 Ω | - | □ | □ | □ | ■ | □ |
| 750 K | 375 Ω | - | □ | □ | □ | ■ | ■ |
| 800 K | 400 Ω | - | □ | □ | □ | ■ | □ |
| 850 K | 425 Ω | - | □ | □ | □ | □ | ■ |
| 900 K | 450 Ω | - | □ | □ | □ | □ | □ |

| Choice of outputs | | Switch 2 | |
|-------------------|--|----------|---|
| Output | | 6 | 7 |
| 0...10 V | | ■ | □ |
| 0...5 V | | ■ | ■ |
| 0...20 mA | | □ | □ |
| 4...20 mA | | □ | ■ |

| Switch on the manual fine adjustments | | S. 1 |
|---------------------------------------|--|------|
| Man. adjustment | | 8 |
| off | | □ |
| on | | ■ |

| Choice of step response time | | S. 2 |
|------------------------------|--|------|
| Step response time | | 8 |
| slow | | ■ |
| fast | | □ |

Accuracy, slow/fast step response time


| |
|--|
| PT 100, Ni 100: 0.3 % from measuring range 0.8 % |
| from measuring range < 100 K / 0.3 K / 0.8 K |
| Potentiometer: 0.2 % from end value / 0.3 % |
| Resistance: 0.2 % from end value / 0.3 % |

Temperature coefficient

| | |
|---------------------------------|----------------|
| Measuring range ≥ 200 K | ≤ 200 ppm / °C |
| 100 K ≤ Measuring range < 200 K | ≤ 250 ppm / °C |
| 40 K ≤ Measuring range < 100 K | ≤ 400 ppm / °C |

Adjustment example for zero and span

| Temperature adjustment: | |
|-------------------------|------------------|
| Output | 4...20 mA |
| DIP switch | -10 °C...+110 °C |
| Span | 75...110 °C |
| Range | 120 °C |
| Adjustment range | ± 12.5 % |

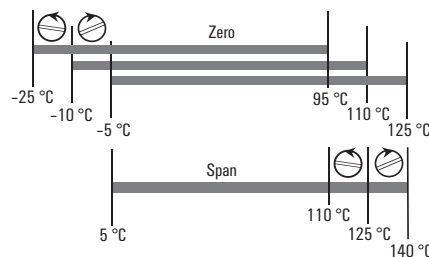

Wavetool adjustment tool



This service tool enables quick and straightforward configuration of the WAVE^{ANALOG} PRO.

Internet download:
<http://www.weidmueller.com>

RTD signal isolator/converter

- Universally adjustable via DIP switch
- 3-way isolation
- Linearisation
- Power supply can be cross-connected using plug-in jumpers

PRO RTD 1000

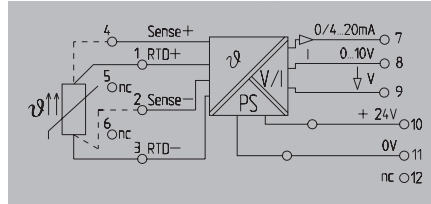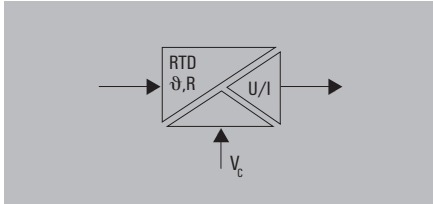

D

Technical data

Input

Sensor

Temperature input range

Output

- Output current / Output voltage
- Offset current / Offset voltage
- Load impedance, voltage/current
- Sensor error detection
- Fine adjustment
- Status indicator

General data

- Configuration
- Supply voltage
- Power consumption
- Step response time
- Ambient temperature
- Approvals

Insulation coordination

- Standards
- EMC standards
- Rated voltage
- Impulse withstand voltage
- Insulation voltage
- Overvoltage category
- Pollution degree
- Clearance & creepage distances

Technical data

Ni1000/2-/3-/4-wire, Potentiometer: min. 0-1kΩ, max. 0-100kΩ, PT1000/2-/3-/4-wire, Resistance: 0-4.5kΩ
Configurable, PT1000: -200°C...850°C, NI1000: -60°C...+250°C

- 0...20 mA, 4...20 mA / 0...10 V
- max. 100 μA / max. 0.05 V
- ≥ 1 kΩ / ≤ 600 Ω
- LED flashing (output value: > 20 mA, >10 V)
- ± 12.5 % of FSR; potentiometer: ± 12.5 % ... ± 25 %
- Module active: LED on/ wire breakage: LED flashing/
Error: LED off

- DIP switch, Potentiometer
- 24 V DC ± 20 %
- 830...880...980mW at I_{OUT} = 20 mA
- Fast/slow:2-/3-/4-conductor: 1.2s/2.3s; potentiometer: 0.5s/1.2s
- 0 °C...55 °C
- CE; cULus; EAC; GL

- DIN EN 50178, DIN EN 61000-4-2
- EN 55011, EN 61000-6
- 300 V
- 4 kV
- 2 kV_{eff} / 5 s
- III
- 2
- ≥ 3 mm

Dimensions

- Clamping range (nominal / min. / max.)
- Depth x width x height

Note

Screw connection

- 2.5 / 0.5 / 2.5
- 112.4 / 17.5 /

Ordering data

Screw connection

| Type | Qty. | Order No. |
|-------------------|------|------------|
| WAS5 PRO RTD 1000 | 1 | 8679490000 |

Note

Accessories

Note

Cross-connector for power supplies and markers - refer to Accessories

PRO RTD 1000

Switch position / setting options

| Choice of inputs | | Switch 1 | | |
|------------------|--------|----------|---|---|
| Input | | 1 | 2 | 3 |
| PT1000 | 2-wire | ■ | ■ | ■ |
| PT1000 | 3-wire | □ | ■ | ■ |
| PT1000 | 4-wire | ■ | □ | ■ |
| R | 2-wire | □ | □ | ■ |
| NI1000 | 2-wire | ■ | ■ | □ |
| NI1000 | 3-wire | □ | ■ | □ |
| NI1000 | 4-wire | ■ | □ | □ |
| Potentiometer | | □ | □ | □ |

■ = on
□ = off

| Choice of minimum input size | | | | Switch 1 | | | |
|------------------------------|-----------|---------------------|--|----------|---|---|---|
| R_{min} | R_{min} | Poti _{min} | | 4 | 5 | 6 | 7 |
| 0 °C | 0 Ω | 0 % | | ■ | ■ | ■ | ■ |
| -10 °C | 100 Ω | 10 % | | ■ | ■ | ■ | □ |
| -20 °C | 200 Ω | 20 % | | ■ | ■ | □ | ■ |
| -25 °C | 200 Ω | 25 % | | ■ | ■ | □ | □ |
| -30 °C | 300 Ω | 30 % | | ■ | □ | ■ | ■ |
| -40 °C | 400 Ω | 40 % | | ■ | □ | ■ | □ |
| -50 °C | 500 Ω | 50 % | | ■ | □ | □ | ■ |
| -60 °C | 600 Ω | 60 % | | ■ | □ | □ | □ |
| -70 °C | 700 Ω | 70 % | | □ | ■ | ■ | ■ |
| -80 °C | 800 Ω | 80 % | | □ | ■ | ■ | □ |
| -90 °C | 900 Ω | | | □ | ■ | □ | ■ |
| -100 °C | 1000 Ω | | | □ | ■ | □ | □ |
| -150 °C | 1500 Ω | | | □ | □ | ■ | ■ |
| -200 °C | 2000 Ω | | | □ | □ | ■ | □ |
| Special area | | | | □ | □ | □ | ■ |

| Choice of measuring range | | | Switch 2 | | | | |
|---------------------------|--------|---------|----------|---|---|---|---|
| T | R | Poti | 1 | 2 | 3 | 4 | 5 |
| 40 K | 200 Ω | 20 % | ■ | ■ | ■ | ■ | ■ |
| 50 K | 250 Ω | 25 % | ■ | ■ | ■ | ■ | □ |
| 60 K | 300 Ω | 30 % | ■ | ■ | ■ | □ | ■ |
| 70 K | 350 Ω | 35 % | ■ | ■ | ■ | □ | □ |
| 80 K | 400 Ω | 40 % | ■ | ■ | □ | ■ | ■ |
| 90 K | 450 Ω | 45 % | ■ | ■ | □ | ■ | □ |
| 100 K | 500 Ω | 50 % | ■ | ■ | □ | □ | ■ |
| 110 K | 550 Ω | 55 % | ■ | ■ | □ | □ | □ |
| 120 K | 600 Ω | 60 % | ■ | □ | ■ | ■ | ■ |
| 125 K | 625 Ω | 62.50 % | ■ | □ | ■ | ■ | □ |
| 130 K | 650 Ω | 65 % | ■ | □ | ■ | □ | ■ |
| 140 K | 700 Ω | 70 % | ■ | □ | □ | ■ | □ |
| 150 K | 750 Ω | 75 % | ■ | □ | □ | ■ | ■ |
| 160 K | 800 Ω | 80 % | ■ | □ | □ | ■ | □ |
| 170 K | 850 Ω | 85 % | ■ | □ | □ | □ | ■ |
| 180 K | 900 Ω | 90 % | ■ | □ | □ | □ | □ |
| 190 K | 950 Ω | 95 % | □ | ■ | ■ | ■ | ■ |
| 200 K | 1000 Ω | 100 % | □ | ■ | ■ | ■ | □ |
| 250 K | 1250 Ω | - | □ | □ | ■ | □ | ■ |
| 300 K | 1500 Ω | - | □ | □ | ■ | □ | □ |
| 350 K | 1750 Ω | - | □ | ■ | □ | ■ | ■ |
| 400 K | 2000 Ω | - | □ | ■ | □ | ■ | □ |
| 450 K | 2250 Ω | - | □ | ■ | □ | □ | ■ |
| 500 K | 2500 Ω | - | □ | □ | ■ | □ | □ |
| 550 K | 2750 Ω | - | □ | □ | ■ | ■ | ■ |
| 600 K | 3000 Ω | - | □ | □ | ■ | ■ | □ |
| 650 K | 3250 Ω | - | □ | □ | ■ | □ | ■ |
| 700 K | 3500 Ω | - | □ | □ | □ | ■ | □ |
| 750 K | 3750 Ω | - | □ | □ | □ | ■ | ■ |
| 800 K | 4000 Ω | - | □ | □ | □ | ■ | □ |
| 850 K | 4250 Ω | - | □ | □ | □ | □ | ■ |
| 900 K | 4500 Ω | - | □ | □ | □ | □ | □ |

| Choice of outputs | | Switch 2 | |
|-------------------|--|----------|---|
| Output | | 6 | 7 |
| 0...10 V | | ■ | □ |
| 0...5 V | | ■ | ■ |
| 0...20 mA | | □ | □ |
| 4...20 mA | | □ | ■ |

| Switch on the manual fine adjustments | | S. 1 |
|---------------------------------------|---|------|
| Man. adjustment | 8 | |
| off | | □ |
| on | | ■ |

| Choice of step response time | | S. 2 |
|------------------------------|---|------|
| Step response time | 8 | |
| slow | | ■ |
| fast | | □ |

Accuracy, slow/fast step response time


| |
|--|
| PT 100, Ni 100: 0.3 % from measuring range 0.8 % |
| from measuring range < 100 K / 0.3 K / 0.8 K |
| Potentiometer: 0.2 % from end value / 0.3 % |
| Resistance: 0.2 % from end value / 0.3 % |

Temperature coefficient

| | |
|---------------------------------|----------------|
| Measuring range ≥ 200 K | ≤ 200 ppm / °C |
| 100 K ≤ Measuring range < 200 K | ≤ 250 ppm / °C |
| 40 K ≤ Measuring range < 100 K | ≤ 400 ppm / °C |

Adjustment example for zero and span

| Temperature adjustment: | |
|-------------------------|------------------|
| Output | 4...20 mA |
| DIP switch | -10 °C...+110 °C |
| Span | 75...110 °C |
| Range | 120 °C |
| Adjustment range | ± 12.5 % |

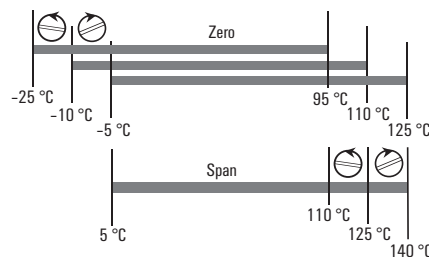


Wavetool adjustment tool

This service tool enables quick and straightforward configuration of the WAVE_{ANALDG} PRO.

Internet download:
<http://www.weidmueller.com>


RTD signal isolator/converter

- Universally adjustable via DIP switch
- 3-way isolation
- Linearisation
- Power supply can be cross-connected using plug-in jumpers.

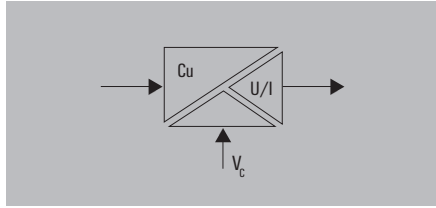

PRO RTD Cu

UL Class I, Div.2

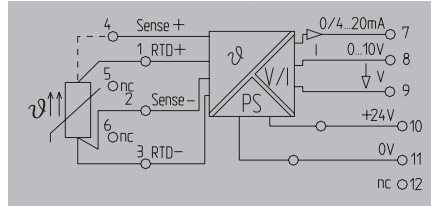

Technical data

Input

Sensor
Temperature input range

Output

Output current / Output voltage
Offset current / Offset voltage
Load impedance, voltage/current
Sensor error detection
Fine adjustment
Status indicator

General data

Configuration
Supply voltage
Power consumption
Step response time
Ambient temperature
Approvals

Insulation coordination

Standards
EMC standards
Rated voltage
Impulse withstand voltage
Insulation voltage
Overvoltage category
Pollution degree
Clearance & creepage distances

Dimensions

Clamping range (nominal / min. / max.)
Depth x width x height

Note

Ordering data

Screw connection

Note

Accessories

Note

3-/4-wired, Cu 10, Cu 25, Cu 50, Cu 100

Adjustable from -200...+260°C

0...20 mA, 4...20 mA / 0...10 V
max. 100 µA / max. 0.05 V
≥ 1 kΩ / ≤ 600 Ω
LED flashing (output value: > 20 mA, >10 V)
± 12.5% of FSR
Module active: LED on/ wire breakage: LED flashing/
Error: LED off

DIP switch
24 V DC ± 20 %
880...980...1030mW at I_{out} = 20 mA
Fast: 1.2 s/ slow: 2.2 s
0 °C...55 °C
CE; cULus; cULusEX; EAC

DIN EN 50178, DIN EN 61000-4-2
EN 55011, EN 61000-6
300 V
4 kV
2 kV_{em} / 5 s
III
2
≥ 3 mm

Screw connection

2.5 / 0.5 / 2.5
112.4 / 17.5 /

| Type | Qty. | Order No. |
|-----------------|------|------------|
| WAS5 PRO RTD Cu | 1 | 8638950000 |

Cross-connector for power supplies and markers - refer to Accessories

| Connection | Selection of connection Switch 1 | | Selection of sensor Switch 1 | |
|------------|----------------------------------|---|------------------------------|---|
| | 1 | 2 | 2 | 3 |
| 3-wire | ■ | ■ | Cu 10 | ■ |
| 4-wire | □ | □ | Cu 25 | ■ |
| | | | Cu 50 | □ |
| | | | Cu 100 | □ |

| ° min | Selection of minimum input values Switch 1 | | | |
|---------------|--|---|---|---|
| | 4 | 5 | 6 | 7 |
| - 0 °C | ■ | ■ | ■ | ■ |
| - 10 °C | ■ | ■ | ■ | □ |
| - 20 °C | ■ | ■ | □ | ■ |
| - 25 °C | ■ | ■ | □ | □ |
| - 30 °C | ■ | □ | ■ | ■ |
| - 40 °C | ■ | □ | ■ | □ |
| - 50 °C | ■ | □ | □ | □ |
| - 60 °C | ■ | □ | □ | □ |
| - 70 °C | □ | ■ | ■ | ■ |
| - 80 °C | □ | ■ | ■ | □ |
| - 90 °C | □ | ■ | □ | ■ |
| - 100 °C | □ | ■ | □ | □ |
| - 150 °C | □ | □ | ■ | ■ |
| - 200 °C | □ | □ | ■ | □ |
| special range | □ | □ | □ | □ |

| Span | Selection of the measurement range Switch 2 | | | | |
|-------|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| 40 K | ■ | ■ | ■ | ■ | ■ |
| 50 K | ■ | ■ | ■ | ■ | □ |
| 60 K | ■ | ■ | ■ | □ | ■ |
| 70 K | ■ | ■ | ■ | □ | □ |
| 80 K | ■ | ■ | □ | ■ | ■ |
| 90 K | ■ | ■ | □ | ■ | □ |
| 100 K | ■ | ■ | □ | □ | ■ |
| 110 K | ■ | ■ | □ | □ | □ |
| 120 K | ■ | □ | ■ | ■ | ■ |
| 125 K | ■ | □ | ■ | ■ | □ |
| 130 K | ■ | □ | ■ | □ | ■ |
| 140 K | ■ | □ | ■ | □ | □ |
| 150 K | ■ | □ | □ | ■ | ■ |
| 160 K | ■ | □ | □ | ■ | □ |
| 170 K | ■ | □ | □ | □ | ■ |
| 180 K | ■ | □ | □ | □ | □ |
| 190 K | □ | ■ | ■ | ■ | ■ |
| 200 K | □ | ■ | ■ | ■ | □ |
| 210 K | □ | ■ | ■ | □ | ■ |
| 220 K | □ | ■ | ■ | □ | □ |
| 230 K | □ | ■ | □ | ■ | ■ |
| 240 K | □ | ■ | □ | ■ | □ |
| 250 K | □ | ■ | □ | □ | ■ |
| 260 K | □ | ■ | □ | □ | □ |
| 270 K | □ | □ | ■ | ■ | ■ |
| 280 K | □ | □ | ■ | ■ | □ |
| 290 K | □ | □ | ■ | □ | ■ |
| 300 K | □ | □ | ■ | □ | □ |
| 350 K | □ | □ | □ | ■ | ■ |
| 400 K | □ | □ | □ | ■ | □ |
| 450 K | □ | □ | □ | □ | ■ |
| 460 K | □ | □ | □ | □ | □ |

| Connection | Selection of Output Switch 2 | | Switching on the manual fine adjustment Switch 1 | |
|-------------|------------------------------|---|--|---|
| | 6 | 7 | man adj. | 8 |
| 0 ... 10 V | ■ | □ | off | □ |
| 0 ... 20 mA | □ | ■ | on | □ |
| 4 ... 20 mA | □ | ■ | on | ■ |




| Time of step response | Selection of step set time Switch 2 | |
|-----------------------|-------------------------------------|---------|
| | 8 | |
| slow | ■ | ■ = on |
| fast | □ | □ = off |

RTD, 4-wire converter

- 4-wire connection
- Adjustable temperature range from -200 °C...+800 °C
- Power supply can be cross-connected using plug-in jumpers
- No galvanic isolation between input and output circuits

PT100 / 4 0 (4)...20 mA

PT100 / 4 0...10 V

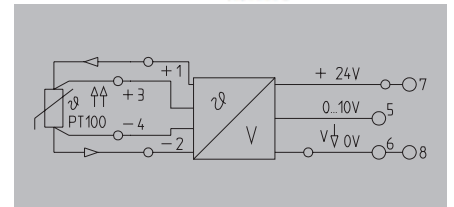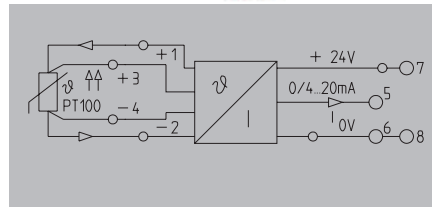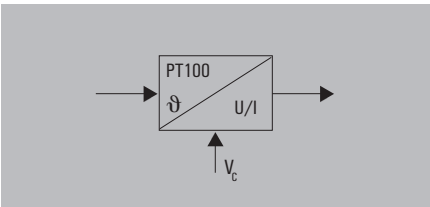

Technical data

| |
|--------------------------------------|
| Input |
| Sensor |
| Sensor supply |
| Output |
| Output voltage / Output current |
| Load impedance, voltage/current |
| General data |
| Configuration |
| Supply voltage / Current consumption |
| Ambient temperature |
| Accuracy |
| Approvals |
| Standards |
| EMC standards |

| |
|---|
| PT100 / 2-/3-/4-wire |
| 1.45 mA |
| / 0...20 mA, 4...20 mA |
| / ≤ 500 Ω |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / |
| 0 °C...55 °C |
| 100K ≤ MB < 600K: 0.1 %; MB ≥ 600K: 0.2 %; of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

| |
|---|
| PT100 / 2-/3-/4-wire |
| 1.45 mA |
| 0...10 V / |
| ≥ 1 kΩ / |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / |
| 0 °C...55 °C |
| 100K ≤ MB < 600K: 0.1 %; MB ≥ 600K: 0.2 %; of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| | |
|---------------------------------|---------------------------------|
| Tension clamp connection | Tension clamp connection |
| 1.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

| | |
|---------------------------------|---------------------------------|
| Tension clamp connection | Tension clamp connection |
| 1.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

Ordering data

| | |
|-------------------------------|--------------------------|
| Adjustable from -200...+800°C | Tension-clamp connection |
|-------------------------------|--------------------------|

| | | |
|-------------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WTZ4 PT100/4 C 0/4-20mA | 1 | 8432280000 |

| | | |
|----------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WTZ4 PT100/4 V 0-10V | 1 | 8432250000 |

Note

Cross-connectors for power supplies and markers - refer to WAVESERIES accessories


Specify temperature range for special calibrations.

Applications

Example for Zero and Span

Temperature adjustment

| | |
|--------------------|-------------|
| T _{min} | -10 °C |
| Span | 75...110 °C |
| Span | 95 °C |
| Adjustment of Span | +25 % |



Temperature coefficient

| | |
|-----------------------------------|--------------------------------|
| Measurement range ≥ 200 K | ≤ 200 ppm/°C (typ. 80 ppm/°C) |
| 100 K ≤ Measurement range < 200 K | ≤ 205 ppm/°C (typ. 90 ppm/°C) |
| 40 K ≤ Measurement range < 100 K | ≤ 450 ppm/°C (typ. 180 ppm/°C) |

Aids

- Voltage supply 24 V DC, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of > 0,1% of the end value.

Switch position/setting options

| | | | | | | | |
|-----------------------------|----------|---------------|-----------|--------------|----------|----------|----------|
| Tmin | 1 | 2 | 3 | Span | 4 | 5 | 6 |
| 0 °C | ■ | ■ | ■ | 40...50 °C | ■ | ■ | ■ |
| -10 °C | ■ | ■ | □ | 50...75 °C | ■ | ■ | □ |
| -20 °C | ■ | □ | ■ | 75...110 °C | ■ | □ | ■ |
| -40 °C | ■ | □ | □ | 110...165 °C | ■ | □ | ■ |
| -60 °C | □ | ■ | ■ | 165...245 °C | □ | ■ | ■ |
| -80 °C | □ | ■ | □ | 245...360 °C | □ | ■ | □ |
| -100 °C | □ | □ | ■ | 360...540 °C | □ | □ | ■ |
| -200 °C | □ | □ | □ | 540...800 °C | □ | □ | □ |
| Output ¹⁾ | 7 | PT 100 | | | | | |
| Range | 8 | 9 | 10 | | | | |
| 0...20 mA | □ | 2-Wire | | | ■ | ■ | ■ |
| 4...20 mA | ■ | 3-Wire | | | ■ | ■ | ■ |
| | | 4-Wire | | | □ | □ | □ |

¹⁾ only modules with current output

■ = on
□ = off




RTD, 3-wire converter

- 3-wire connection
- Adjustable temperature range from -200 °C...+800 °C
- Power supply can be cross-connected using plug-in jumpers
- No galvanic isolation between input and output circuits

PT100 / 3 0...10 V



PT100 / 3 0 (4)...20 mA

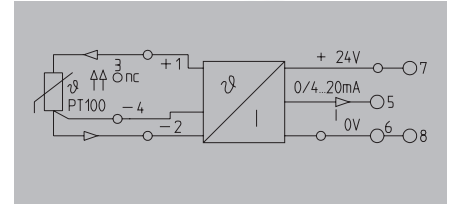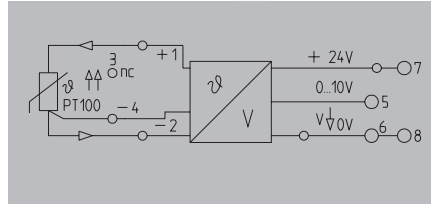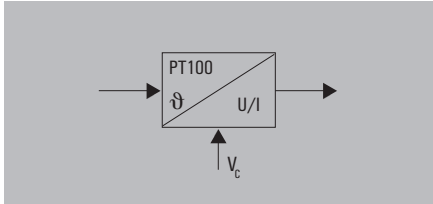

Technical data

| |
|--------------------------------------|
| Input |
| Sensor |
| Sensor supply |
| Output |
| Output voltage / Output current |
| Load impedance, voltage/current |
| General data |
| Configuration |
| Supply voltage / Current consumption |
| Ambient temperature |
| Accuracy |
| Approvals |
| Standards |
| EMC standards |

| |
|--------------------------------|
| PT100/3-wire |
| 1.45 mA |
| 0...10 V / |
| ≥ 1 kΩ / |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / |
| 0 °C...55 °C |
| ± 0.5 % of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

| |
|--------------------------------|
| PT100/3-wire |
| 1.45 mA |
| / 0...20 mA, 4...20 mA |
| / ≤ 500 Ω |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / |
| 0 °C...55 °C |
| ± 0.5 % of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

Dimensions

| |
|--|
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

Tension clamp connection

| |
|-------------|
| 1.5/0.5/2.5 |
| 112.4/12.5 |

Tension clamp connection

| | |
|-------------|-------------|
| 1.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

Ordering data

| | |
|-------------------------------|--------------------------|
| Adjustable from -200...+800°C | Tension-clamp connection |
|-------------------------------|--------------------------|

| Type | Qty. | Order No. |
|----------------------|------|------------|
| WTZ4 PT100/3 V 0-10V | 1 | 8432130000 |

| Type | Qty. | Order No. |
|-------------------------|------|------------|
| WTZ4 PT100/3 C 0/4-20mA | 1 | 8432160000 |

Note

Specify temperature range for special calibrations.


Cross-connectors for power supplies and markers - refer to WAVESERIES accessories

Applications

Example for Zero and Span

Temperature adjustment

| | |
|--------------------|-------------|
| T _{min} | -10 °C |
| Span | 75...110 °C |
| Span | 95 °C |
| Adjustment of Span | +25 % |



Temperature coefficient

| | |
|-----------------------------------|--------------------------------|
| Measurement range ≥ 200 K | ≤ 200 ppm/°C (typ. 80 ppm/°C) |
| 100 K ≤ Measurement range < 200 K | ≤ 205 ppm/°C (typ. 90 ppm/°C) |
| 40 K ≤ Measurement range < 100 K | ≤ 450 ppm/°C (typ. 180 ppm/°C) |

Aids

- Voltage supply 24 V DC, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of > 0,1% of the end value.

Switch position/setting options

| T _{min} | 1 | 2 | 3 | Span | 4 | 5 | 6 |
|------------------|---|---|---|--------------|---|---|---|
| 0 °C | ■ | ■ | ■ | 40...50 °C | ■ | ■ | ■ |
| -10 °C | ■ | ■ | □ | 50...75 °C | ■ | ■ | □ |
| -20 °C | ■ | □ | ■ | 75...110 °C | ■ | □ | ■ |
| -40 °C | ■ | □ | □ | 110...165 °C | ■ | □ | ■ |
| -60 °C | □ | ■ | ■ | 165...245 °C | □ | ■ | ■ |
| -80 °C | □ | ■ | □ | 245...360 °C | □ | ■ | □ |
| -100 °C | □ | □ | ■ | 360...540 °C | □ | □ | ■ |
| -200 °C | □ | □ | □ | 540...800 °C | □ | □ | □ |


| Output ¹⁾ | 7 | PT 100 | 8 | 9 | 10 |
|----------------------|---|--------|---|---|----|
| Range | ■ | 2-Wire | ■ | ■ | ■ |
| 0...20 mA | □ | 3-Wire | ■ | ■ | ■ |
| 4...20 mA | ■ | 4-Wire | □ | □ | □ |

¹⁾ only modules with current output


■ = on
□ = off

RTD, 2-wire converter


- 2-wire connection
- Adjustable temperature range from -200 °C...+800 °C
- Power supply can be cross-connected using plug-in jumpers
- No galvanic isolation between input and output circuits

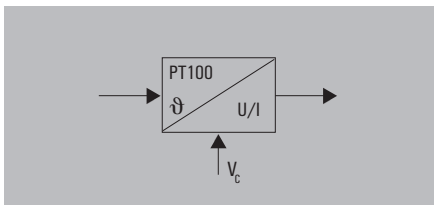

PT100 / 2 0...10 V

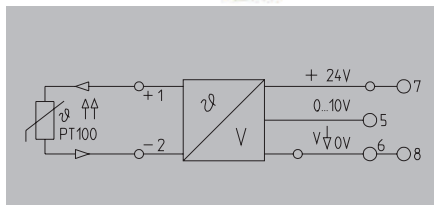

PT100/2 0 (4)...20 mA

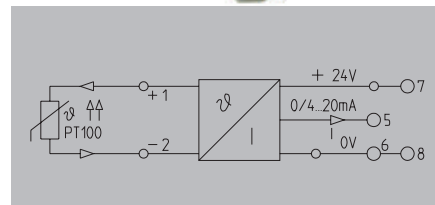

Technical data

| |
|--------------------------------------|
| Input |
| Sensor |
| Sensor supply |
| Output |
| Output voltage / Output current |
| Load impedance, voltage/current |
| General data |
| Configuration |
| Supply voltage / Current consumption |
| Ambient temperature |
| Accuracy |
| Approvals |
| Standards |
| EMC standards |

| |
|---|
| PT100/2-wire |
| 1.45 mA |
| 0...10 V / |
| ≥ 1 kΩ / |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / < 38 mA @ I _{OUT} = 20 mA |
| 0 °C...55 °C |
| ± 0.5 % of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

| |
|---|
| PT100/2-wire |
| 1.45 mA |
| / 0...20 mA, 4...20 mA |
| / ≤ 500 Ω |
| DIP switch, Potentiometer |
| 24 V DC ± 20 % / < 48 mA @ I _{OUT} = 20 mA |
| 0 °C...55 °C |
| ± 0.5 % of measuring range |
| CE; CSA; cULus; EAC |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6 |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| | |
|---------------------------------|---------------------------------|
| Tension clamp connection | Tension clamp connection |
| 1.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

| | |
|---------------------------------|---------------------------------|
| Tension clamp connection | Tension clamp connection |
| 1.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/12.5 | 112.4/12.5 |

Ordering data

| | |
|-------------------------------|--------------------------|
| Adjustable from -200...+800°C | Tension-clamp connection |
|-------------------------------|--------------------------|

| | | |
|----------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WTZ4 PT100/2 V 0-10V | 1 | 8432190000 |

| | | |
|-------------------------|-------------|------------------|
| Type | Qty. | Order No. |
| WTZ4 PT100/2 C 0/4-20mA | 1 | 8432220000 |

Note

Specify temperature range for special calibrations.


Cross-connectors for power supplies and markers - refer to WAVESERIES accessories

Applications

Example for Zero and Span

Temperature adjustment

| | |
|--------------------|-------------|
| T _{min} | -10 °C |
| Span | 75...110 °C |
| Span | 95 °C |
| Adjustment of Span | +25 % |



Temperature coefficient

| | |
|-----------------------------------|--------------------------------|
| Measurement range ≥ 200 K | ≤ 200 ppm/°C (typ. 80 ppm/°C) |
| 100 K ≤ Measurement range < 200 K | ≤ 205 ppm/°C (typ. 90 ppm/°C) |
| 40 K ≤ Measurement range < 100 K | ≤ 450 ppm/°C (typ. 180 ppm/°C) |

Aids

- Voltage supply 24 V DC, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of > 0,1% of the end value.

Switch position/setting options

| | | | | | | | |
|-----------------------------|----------|---------------|-----------|---------------|----------|----------|----------|
| Tmin | 1 | 2 | 3 | Span | 4 | 5 | 6 |
| 0 °C | ■ | ■ | ■ | 40...50 °C | ■ | ■ | ■ |
| -10 °C | ■ | ■ | □ | 50...75 °C | ■ | ■ | □ |
| -20 °C | ■ | □ | ■ | 75...110 °C | ■ | □ | ■ |
| -40 °C | ■ | □ | □ | 110...165 °C | ■ | □ | □ |
| -60 °C | □ | ■ | ■ | 165...245 °C | □ | ■ | ■ |
| -80 °C | □ | ■ | □ | 245...360 °C | □ | ■ | □ |
| -100 °C | □ | □ | ■ | 360...540 °C | □ | □ | ■ |
| -200 °C | □ | □ | □ | 540...800 °C | □ | □ | □ |
| Output ¹⁾ | 7 | PT 100 | | | | | |
| Range | 8 | 9 | 10 | 2-Wire | ■ | ■ | ■ |
| 0...20 mA | □ | □ | ■ | 3-Wire | ■ | ■ | ■ |
| 4...20 mA | ■ | ■ | □ | 4-Wire | □ | □ | □ |

¹⁾ only modules with current output

■ = on
□ = off



Thermal converter type:

K,J,T,E,N,R,S,B

- 3-way isolation
- Internal cold-junction compensation
- Power supply can be cross-connected using plug-in jumpers
- Suitable for insulated and uninsulated thermocouples
- WAVETOOL software helps with configuration, download at www.weidmueller.com

PRO Thermo

UL Class I, Div. 2

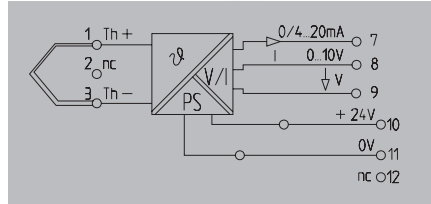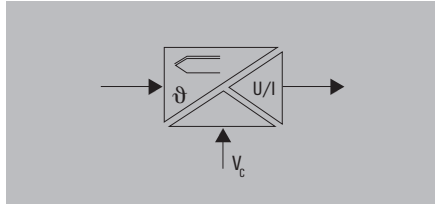

Technical data

| Input | |
|---|-----------------|
| Sensor | |
| Temperature input range | |
| Output | |
| Output voltage / Output current | |
| Load impedance, voltage/current | |
| Offset current / Offset voltage | |
| Line resistance in measuring circuit | |
| Sensor error detection | |
| Fine adjustment | |
| Status indicator | |
| General data | |
| Configuration | |
| Supply voltage | |
| Power consumption | |
| Step response time | |
| Current-carrying capacity of cross-connect. | |
| Ambient temperature | |
| Storage temperature | |
| Default setting | |
| Approvals | |
| Insulation coordination | |
| Standards | |
| EMC standards | |
| Rated voltage | |
| Impulse withstand voltage | |
| Insulation voltage | |
| Overvoltage category | |
| Pollution degree | |
| Clearance & creepage distances | |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

Ordering data

| | Screw connection |
|------|--------------------------|
| | Tension-clamp connection |
| Note | |

Accessories

| Note |
|------|
|------|

| Screw connection | | Tension clamp connection | |
|------------------|--------|--------------------------|------------|
| 2.5/0.5/2.5 | | 1.5/0.5/2.5 | |
| 112.4/17.5 | | 112.4/17.5 | |
| Type | | | |
| WAS5 PRO Thermo | Qty. 1 | Order No. | 8560720000 |
| WAZ5 PRO Thermo | Qty. 1 | Order No. | 8560730000 |

| Type | Qty. | Order No. |
|-----------------|------|------------|
| WAS5 PRO Thermo | 1 | 8560720000 |
| WAZ5 PRO Thermo | 1 | 8560730000 |

Cross-connector for power supplies and markers - refer to Accessories

| Typ | Select of thermocoupler SW1 | | | Selection of minimum temperature SW1 | | | | |
|-----|-----------------------------|---|---|--------------------------------------|---|---|---|---|
| | 1 | 2 | 3 | 9 min | 1 | 2 | 3 | 4 |
| K | ■ | ■ | ■ | 0 °C | ■ | ■ | ■ | ■ |
| J | □ | ■ | ■ | -10 °C | ■ | ■ | ■ | □ |
| T | ■ | □ | ■ | -20 °C | ■ | ■ | □ | ■ |
| E | □ | □ | ■ | -30 °C | ■ | ■ | □ | □ |
| N | ■ | ■ | □ | -40 °C | ■ | □ | ■ | ■ |
| R | □ | □ | □ | -50 °C | ■ | □ | □ | □ |
| S | ■ | □ | □ | -100 °C | ■ | □ | □ | ■ |
| B | □ | □ | □ | -150 °C | ■ | □ | □ | □ |
| | | | | -200 °C | □ | ■ | ■ | ■ |
| | | | | +50 °C | □ | ■ | ■ | □ |
| | | | | +100 °C | □ | ■ | ■ | ■ |
| | | | | +150 °C | □ | ■ | □ | □ |
| | | | | +200 °C | □ | □ | ■ | □ |
| | | | | +250 °C | □ | □ | ■ | □ |
| | | | | +500 °C | □ | □ | □ | ■ |
| | | | | Special range | □ | □ | □ | □ |

| Span | Selection of temperature span SW2 | | | | | Selection of output Switch 2 | | |
|---------|-----------------------------------|---|---|---|---|--|---|---|
| | 1 | 2 | 3 | 4 | 5 | Output | 6 | 7 |
| 100 °C | ■ | ■ | ■ | ■ | ■ | 0 ... 10 V | ■ | □ |
| 150 °C | ■ | ■ | ■ | ■ | □ | 0 ... 20 mA | □ | □ |
| 200 °C | ■ | ■ | ■ | ■ | □ | 4 ... 20 mA | □ | ■ |
| 250 °C | ■ | ■ | ■ | □ | □ | Switching on the manual fine adjustment SW 2 | | |
| 300 °C | ■ | ■ | ■ | □ | □ | man. adjust. | 6 | |
| 350 °C | ■ | ■ | □ | □ | □ | off | □ | □ |
| 400 °C | ■ | ■ | □ | □ | □ | on | ■ | |
| 450 °C | ■ | ■ | □ | □ | □ | Switching on the filter function SW 2 | | |
| 500 °C | ■ | □ | □ | □ | □ | Filter | 8 | |
| 550 °C | ■ | □ | □ | □ | □ | off | □ | □ |
| 600 °C | ■ | □ | □ | □ | □ | on | ■ | |
| 650 °C | ■ | □ | □ | □ | □ | ■ = on □ = off | | |
| 700 °C | ■ | □ | □ | □ | □ | | | |
| 750 °C | ■ | □ | □ | □ | □ | | | |
| 800 °C | ■ | □ | □ | □ | □ | | | |
| 850 °C | ■ | □ | □ | □ | □ | | | |
| 900 °C | □ | ■ | ■ | ■ | ■ | | | |
| 950 °C | □ | ■ | ■ | ■ | □ | | | |
| 1000 °C | □ | ■ | ■ | ■ | ■ | | | |
| 1050 °C | □ | ■ | ■ | ■ | □ | | | |
| 1100 °C | □ | ■ | ■ | ■ | □ | | | |
| 1150 °C | □ | ■ | ■ | ■ | □ | | | |
| 1200 °C | □ | ■ | □ | □ | □ | | | |
| 1250 °C | □ | ■ | □ | □ | □ | | | |
| 1300 °C | □ | □ | ■ | ■ | ■ | | | |
| 1350 °C | □ | □ | ■ | ■ | □ | | | |
| 1400 °C | □ | □ | ■ | ■ | □ | | | |
| 1450 °C | □ | □ | ■ | ■ | □ | | | |
| 1500 °C | □ | □ | □ | ■ | ■ | | | |
| 1600 °C | □ | □ | □ | ■ | □ | | | |
| 1700 °C | □ | □ | □ | ■ | ■ | | | |
| 1800 °C | □ | □ | □ | ■ | □ | | | |



| Accuracy | | |
|----------|---------------------|-----------------------------|
| K | -200 °C ... -150 °C | ±(5K + 0.1 % of set range) |
| | -150 °C ... 1200 °C | ±(3K + 0.1 % of set range) |
| | 1200 °C ... 1372 °C | ±(4K + 0.1 % of set range) |
| J | -200 °C ... -150 °C | ±(4K + 0.1 % of set range) |
| | -150 °C ... 1200 °C | ±(3K + 0.1 % of set range) |
| T | -200 °C ... -150 °C | ±(5K + 0.1 % of set range) |
| | -150 °C ... 400 °C | ±(3K + 0.1 % of set range) |
| E | -200 °C ... -150 °C | ±(4K + 0.1 % of set range) |
| | -150 °C ... 1000 °C | ±(3K + 0.1 % of set range) |
| N | -200 °C ... -150 °C | ±(6K + 0.1 % of set range) |
| | -150 °C ... 1300 °C | ±(3K + 0.1 % of set range) |
| R | -50 °C ... 200 °C | ±(10K + 0.1 % of set range) |
| | 200 °C ... 1760 °C | ±(6K + 0.1 % of set range) |
| S | -50 °C ... 200 °C | ±(10K + 0.1 % of set range) |
| | 200 °C ... 1760 °C | ±(6K + 0.1 % of set range) |
| B | 50 °C ... 250 °C | ±(25K + 0.1 % of set range) |
| | 250 °C ... 500 °C | ±(10K + 0.1 % of set range) |
| | 500 °C ... 1820 °C | ±(6K + 0.1 % of set range) |

Thermal converter type:

K, J, T, E, N, R, S, B

- No calibration necessary
- Internal cold-junction compensation
- Output signal selectable
- Power supply can be cross-connected using plug-in jumpers
- Suitable for insulated thermocouples
- No galvanic isolation between input and output circuits

Thermo Select

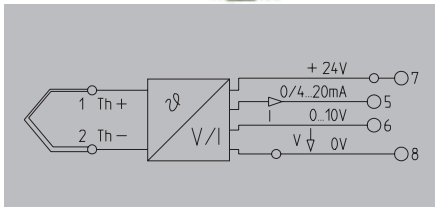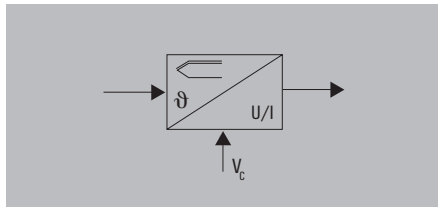

Technical data

| Input | Sensor |
|---|---|
| Temperature input range | -200...+1820 °C |
| Output | Output voltage / Output current |
| Load impedance, voltage/current | / ≤ 500 Ω |
| Temperature coefficient | ± (200 ppm from the span + 0.075 K)/K |
| Step response time | without filter: 1.1 s; with filter: 6 s |
| Sensor error detection | LED flashing (output value: > 20 mA, >10 V) |
| General data | DIP switch |
| Configuration | 24 V DC ± 20 % |
| Supply voltage | < 38 mA @ I _{OUT} = 20 mA |
| Current consumption | ≤ 2 A |
| Current-carrying capacity of cross-connect. | 0 °C...55 °C |
| Ambient temperature | -20 °C...85 °C |
| Storage temperature | CE, CSA; cULus; EAC |
| Approvals | DIN EN 50178, DIN EN 61000-4-2 |
| Insulation coordination | EN 55011, EN 61000-6 |
| Standards | |
| EMC standards | |

| Screw connection | | Tension clamp connection | |
|------------------|--|--------------------------|--|
| 2.5/0.5/2.5 | | 1.5/0.5/2.5 | |
| 112.4/12.5 | | 112.4/12.5 | |

| Dimensions | Clamping range (nominal / min. / max.) | mm ² |
|------------|--|-----------------|
| | Depth x width x height | mm |
| Note | | |

Ordering data

Screw connection
Tension-clamp connection

| Note | |
|------|--|
|------|--|

Accessories

| Note | |
|------|--|
|------|--|

| Type | Qty. | Order No. |
|-------------|------|------------|
| WTS4 THERMO | 1 | 8432300000 |
| WTZ4 THERMO | 1 | 8432310000 |

| Note | Cross-connector for power supplies and markers - refer to Accessories |
|------|---|
|------|---|

Switch position/setting options

| Type | SW 1 | | | SW 2 | | | | | |
|------|-------------------------------------|-------------------------------------|-------------------------------------|---------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | 1 | 2 | 3 | Span | 1 | 2 | 3 | 4 | 5 |
| K | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | 100 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| J | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | 150 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| T | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 200 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| E | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 250 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| N | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | 300 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| R | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | 350 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| S | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 400 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| B | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 450 °C | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 500 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 550 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 600 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 650 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 700 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 750 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 800 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 850 °C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 900 °C | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 950 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1000 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1050 °C | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1100 °C | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1150 °C | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1200 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1250 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1300 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1350 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1400 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1450 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1500 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1600 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1700 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | | | | 1800 °C | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

| Accuracy | K -200 °C ... -150 °C ± (5K + 0,1 % of set range) |
|---|---|
| | -150 °C ... 1200 °C ± (3K + 0,1 % of set range) |
| | 1200 °C ... 1372 °C ± (4K + 0,1 % of set range) |
| J -200 °C ... -150 °C ± (4K + 0,1 % of set range) | |
| | -150 °C ... 1200 °C ± (3K + 0,1 % of set range) |
| T -200 °C ... -150 °C ± (5K + 0,1 % of set range) | |
| | -150 °C ... 400 °C ± (3K + 0,1 % of set range) |
| E -200 °C ... -150 °C ± (4K + 0,1 % of set range) | |
| | -150 °C ... 1000 °C ± (3K + 0,1 % of set range) |
| N -200 °C ... -150 °C ± (6K + 0,1 % of set range) | |
| | -150 °C ... 1300 °C ± (3K + 0,1 % of set range) |
| R -50 °C ... 200 °C ± (10K + 0,1 % of set range) | |
| | 200 °C ... 1760 °C ± (6K + 0,1 % of set range) |
| S -50 °C ... 200 °C ± (10K + 0,1 % of set range) | |
| | 200 °C ... 1760 °C ± (6K + 0,1 % of set range) |
| B 50 °C ... 250 °C ± (25K + 0,1 % of set range) | |
| | 250 °C ... 500 °C ± (10K + 0,1 % of set range) |
| | 500 °C ... 1820 °C ± (6K + 0,1 % of set range) |

■ = off
□ = on

WAVEANALOG PRO Frequency

WAVEANALOG PRO Frequency delivers settings help, for any input and output values.

The input range is set using the DIP switches (a frequency generator is not required)

There are 2 different methods:

D

1. Lower measuring frequency = 0 Hz

- Choose operating mode “= ... fmax” S2.3 = 0 and S2.4 = 0
- Set the upper measuring frequency using DIP switches S1 and S2.1, S2.2 (see table)
- That’s all!








2. Lower measuring frequency ≠ 0 Hz

- First the lower measuring frequency must be saved. Select mode “save fmin”. S2.3 = 1 and S2.4 = 0. Set the frequency using DIP switches S1 and S2.1, S2.2 (see table) To save the frequency, briefly connect the module to the power supply.
- Select mode “fmin ... fmax” S2.3 = 0 and S2.4 = 1
- Set the upper measuring frequency using DIP switches S1 and S2.1, S2.2 (see table).
- That’s all!

Adjusting input range using frequency device to be measured:


- Select the switch setting for saving the frequency: S2.1 = 0, S2.2 = 1, S2.3 = 1 and S2.4 = 1
- Apply min. frequency to the module
- Connect the module to the power supply
- The LED lights up when the input frequency is being measured. If the LED goes off, the frequency has been saved and the module can be disconnected from the power supply again.
- Repeat with max. frequency: S2.1 = 1, S2.2 = 0, S2.3 = 1 and S2.4 = 1
- Select special range: S2.1 = 1, S2.2 = 1, S2.3 = 1 and S2.4 = 1

Connection configuration for the sensors

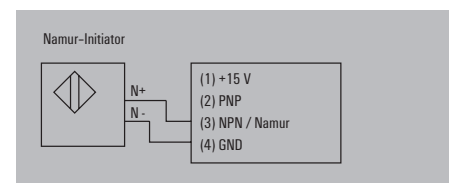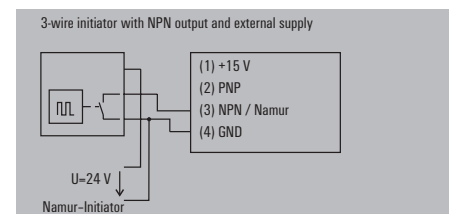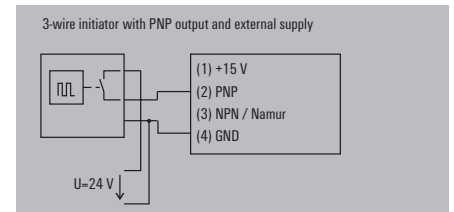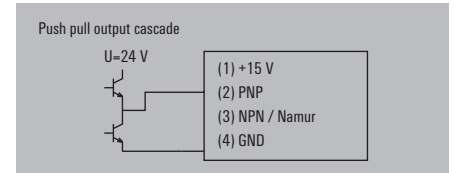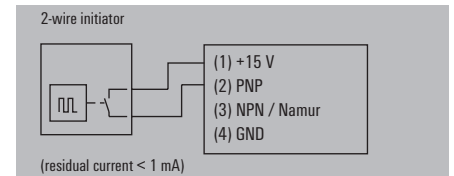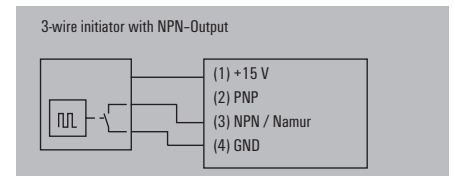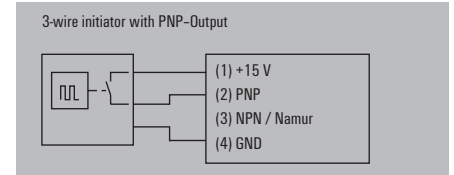


f/DC isolator/converter

- 3-way isolation
- Max. input frequency: 100 kHz
- Input and output ranges can be adjusted via DIP switches
- No calibration necessary
- Supplies the NAMUR sensor
- Programmable custom range
- Can be adjusted and set using the WAVETOOL software, download from www.weidmueller.com

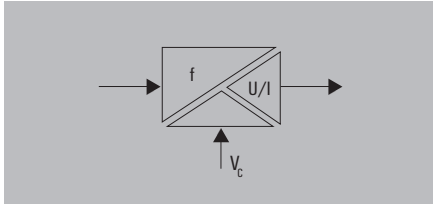

PRO Frequency

UL Class I, Div. 2

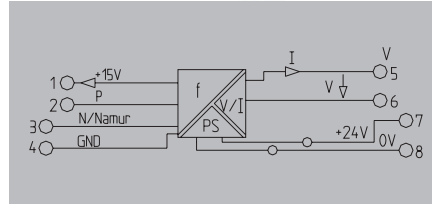

Technical data

| Input | |
|--|-----------------|
| Sensor | |
| Rated input level | |
| Output | |
| Output voltage / Output current | |
| Load impedance, voltage/current | |
| Offset current / Offset voltage | |
| Status indicator | |
| General data | |
| Configuration | |
| Supply voltage | |
| Power consumption | |
| Accuracy | |
| Temperature coefficient | |
| Step response time | |
| Ambient temperature | |
| Approvals | |
| Insulation coordination | |
| Standards | |
| EMC standards | |
| Rated voltage | |
| Impulse withstand voltage | |
| Insulation voltage | |
| Overvoltage category | |
| Pollution degree | |
| Clearance & creepage distances | |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| 2; 3-wire PNP/NPN, Namur initiator, push-pull step, Frequency | | |
|--|------|------------|
| Threshold/hysteresis: Namur: approx. 1.7 mA/approx. 0.2 mA; NPN: approx. 6.5 V/approx. 0.2 V; PNP: approx. 6,7 V/approx. 0.5 V | | |
| 0...5 V, 0...10 V, adjustable / 0...20 mA, 4...20 mA, adjustable | | |
| ≥ 1 kΩ / ≤ 600 Ω | | |
| max. 100 μA / max. 0.05 V | | |
| Green LED | | |
| DIP switch (measurement range 0...15900 Hz), Frequency generator (measurement range 0...100 kHz) | | |
| 24 V DC ± 25 % | | |
| Max. 1.6 W at I _{OUT} = 20 mA | | |
| < 0.2% of output range | | |
| Max. 200 ppm/K of output range | | |
| 360 ms + 2 times the period time of input frequency | | |
| 0 °C...55 °C | | |
| CE; cULus; cULusEX; EAC | | |
| DIN EN 50178, DIN EN 61000-4-2 | | |
| EN 55011, EN 61000-6, EN 61326 | | |
| 300 V | | |
| 6 kV | | |
| 4 kV _{eff} / 5 s | | |
| III | | |
| 2 | | |
| ≥ 5.5 mm | | |
| Screw connection | | |
| 2.5/0.5/2.5 | | |
| Tension clamp connection | | |
| 112.4/12.5 | | |
| 112.4/12.5 | | |
| Type | | |
| WAS4 PRO Freq | Qty. | Order No. |
| WAZ4 PRO Freq | 1 | 8581180000 |
| WAZ4 PRO Freq | 1 | 8581190000 |
| Cross-connector for power supplies and markers - refer to Accessories | | |

Ordering data

| Screw connection | |
|--------------------------|--|
| Tension-clamp connection | |
| Note | |

Accessories

| Note | |
|------|--|
|------|--|

| Selecting the operating mode | | | |
|------------------------------|-------------------------------------|-------------------------------------|--------------------------|
| Operating mode | Switch 2 | 3 | 4 |
| 0 ... fmax | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| fmin ... fmax | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| saving of fmin | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

f = (A+B) x C

| Selecting the frequency | | | | |
|-------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| A | Switch 1 | | | |
| 0 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 4 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 5 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 6 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 7 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 8 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 9 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 10 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 11 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 12 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 13 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 14 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 15 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

| Selecting the frequency | | | | |
|-------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| B | Switch 1 | | | |
| 0 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0.1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0.2 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 0.3 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0.4 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0.5 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 0.6 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0.7 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0.8 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0.9 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |


| Selecting the frequency | | |
|-------------------------|-------------------------------------|-------------------------------------|
| C | Switch 2 | |
| x1 | <input type="checkbox"/> | <input type="checkbox"/> |
| x10 | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| x100 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| x1000 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

| Selecting the output | | | | |
|----------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Output | Switch 2 | | | |
| 0...10 V | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 0...20 mA | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4...20 mA | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0...5 V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

| Special range (frequency generator is required) | | | | |
|---|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Function | Switch 2 | | | |
| save min. frequency | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| save max. frequency | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| select special range | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

- = on
- = off

Application

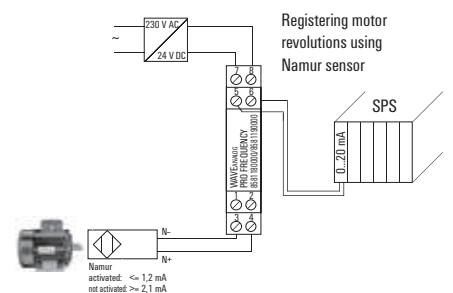

Analogue output




- Monitors AC currents
- Input and output are electrically isolated
- Input and output ranges adjustable via DIP switch

1/5/10 A AC



1/5/10 A AC 4...20 mA

Loop-powered

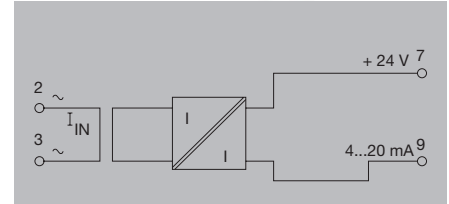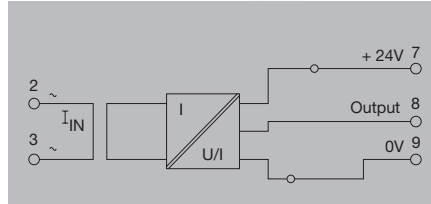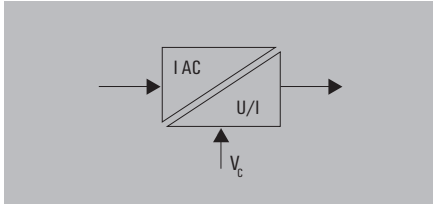

Technical data

| Input | |
|---|--|
| Input current | 0...1 A AC/ 0...5 A AC/ 0...10 A AC |
| Input frequency | 50...60 Hz |
| Max. current | 100 A for 1s |
| Voltage of measuring circuit | 250 V AC |
| Sensor | Transforming (internally) |
| Output | |
| Output current / Output voltage | 0...20 mA / 0...10 V |
| Offset current | max. 100 µA |
| Output signal limit | Approx. 13 V or 24 mA |
| Load impedance, voltage/current | ≥ 1 kΩ / ≤ 600 Ω |
| Step response time | typ. 700 ms |
| Accuracy | 0.5 % FSR |
| Temperature coefficient | ≤ 200 ppm/K |
| Status indicator | LED ON: OK; FLASHING: signal out of range; LED OFF: Error |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 10 % |
| Current consumption | 40 mA @ I _{OUT} = 20 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Ambient temperature / Storage temperature | / 0 °C...50 °C / -20 °C...70 °C |
| Default setting | 0...5 A AC, 4...20 mA |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 (secure separation) |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 6 kV |
| Pollution degree | 2 |
| Overvoltage category | III |
| Clearance & creepage distances | ≥ 5.5 mm |
| Insulation voltage | 4 kV _{eff} / 5 s |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| Screw connection | | Tension clamp connection | |
|------------------|-------------|--------------------------|-------------|
| 2.5/0.5/2.5 | 1.5/0.5/2.5 | 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 92.4/22.5 | 92.4/22.5 | 112.4/22.5 | 112.4/22.5 |

| Screw connection | | Tension clamp connection | |
|------------------|-------------|--------------------------|-------------|
| 2.5/0.5/2.5 | 1.5/0.5/2.5 | 2.5/0.5/2.5 | 1.5/0.5/2.5 |
| 112.4/22.5 | 112.4/22.5 | 112.4/22.5 | 112.4/22.5 |

Ordering data

| | Screw connection |
|------|--------------------------|
| | Tension-clamp connection |
| Note | |

| Type | Qty. | Order No. |
|---------------------|------|------------|
| WAS1 CMA 1/5/10A ac | 1 | 8523400000 |
| WAZ1 CMA 1/5/10A ac | 1 | 8523410000 |

| Type | Qty. | Order No. |
|------------------------|------|------------|
| WAS1 CMA LP 1/5/10A ac | 1 | 8528650000 |
| WAZ1 CMA LP 1/5/10A ac | 1 | 8528660000 |

Accessories

| Note |
|------|
|------|

| |
|--|
| Cross-connectors for power supplies and markers - refer to Accessories |
|--|



| |
|--|
| Cross-connectors for power supplies and markers - refer to Accessories |
|--|

Analogue output

- Monitors AC currents
- Input and output are electrically isolated
- Input and output ranges adjustable via DIP switch
- No calibration required
- ATEX II 3 G nL IIC T4
- UL Class I, Div.2

1/5/10 A AC 4...20 mA

Loop-powered

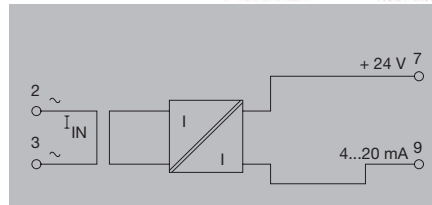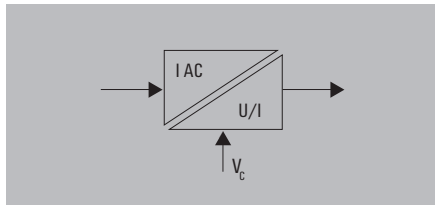

Technical data

| Input | |
|---|--|
| Input current | 0...1 A AC/ 0...5 A AC/ 0...10 A AC |
| Input frequency | 50...60 Hz |
| Max. current | 100 A for 1s |
| Voltage of measuring circuit | 250 V AC |
| Sensor | Transforming (internally) |
| Output | |
| Output current / Output voltage | 4...20 mA (current loop) / |
| Offset current | max. 100 µA |
| Output signal limit | Approx. 24 mA |
| Load impedance, voltage/current | / ≤ 600 Ω |
| Step response time | typ. 700 ms |
| Accuracy | 0.5 % FSR |
| Temperature coefficient | ≤ 200 ppm/K |
| Status indicator | LED ON: OK; FLASHING: signal out of range; LED OFF: Error |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 13...30 V DC, via output current loop |
| Current consumption | |
| Current-carrying capacity of cross-connect. | |
| Ambient temperature / Storage temperature | / 0 °C...50 °C / -20 °C...70 °C |
| Default setting | 0...5 A AC, 4...20 mA |
| Approvals | CE; cULusEX; DEMKOATEX; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 (secure separation) |
| EMC standards | EN 55011, EN 61000-6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 6 kV |
| Pollution degree | 2 |
| Overvoltage category | III |
| Clearance & creepage distances | ≥ 5.5 mm |
| Insulation voltage | 4 kV _{eff} / 5 s |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |

| Screw connection | | |
|------------------------|------|------------|
| Type | Qty. | Order No. |
| WAS1 CMA LP 1/5/10A EX | 1 | 8975590000 |

Ordering data

| Screw connection | |
|--------------------------|--|
| Tension-clamp connection | |
| Note | |

Accessories



| Note | |
|--|--|
| Cross-connectors for power supplies and markers – refer to Accessories | |

WAVESERIES - Voltage measuring transducer

Analogue output

- 3-way isolation
- Max. measuring voltage 450 V AC_{eff}
- Output range selected via DIP switch
- No calibration necessary

VMA V AC

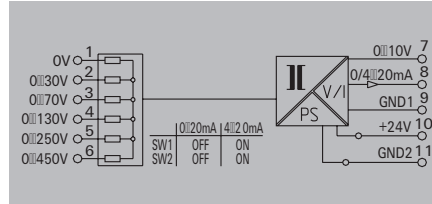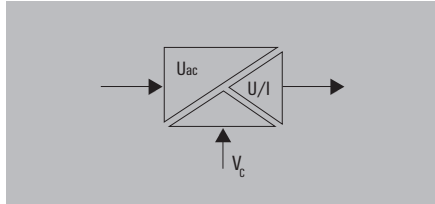


D

Technical data

| | |
|---|---|
| Input | 0...30 / 0...70 / 0...130 / 0...250 / 0...450 V AC |
| Input voltage | |
| Input frequency | 40...400 Hz sinus |
| Max. voltage | 45 / 100 / 180 / 270 / 475 V AC (briefly) |
| Output | 0...10 V / 0...20 mA |
| Output voltage / Output current | |
| Offset voltage / Offset current | max. 0.02 V / max. 40 µA |
| Load impedance, voltage/current | ≥ 1 kΩ / ≤ 600 Ω |
| Accuracy | 1,3 % (40...60 Hz) typ. 1 %; 2 % (70...400 Hz) typ. 1,5 % |
| Temperature coefficient | ≤ 250 ppm/K |
| Step response time | < 300 ms |
| Status indicator | Green LED |
| General data | |
| Configuration | DIP switch |
| Supply voltage | 24 V DC ± 25 % |
| Current consumption | 40...30...24 mA @ I _{OUT} = 20 mA |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Default setting | 0...10 V / 0...20 mA |
| Ambient temperature / Storage temperature | / 0 °C...50 °C / -20 °C...70 °C |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 |
| EMC standards | EN 61000-2-6, EN 61000-6, EN 61326 |
| Rated voltage | supply/output: 300 V; input/output, supply/output: 600 V |
| Impulse withstand voltage | Supply/output: 4 kV; input/output, supply/input: 6 kV |
| Insulation voltage | 4 kV _{eff} / 5 s |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | Supply/output: 3 mm; input/output, supply/output: 5.5 mm |
| Dimensions | |
| Clamping range (nominal / min. / max.) | mm ² |
| Depth x width x height | mm |
| Note | |
| Dimensions | |
| Screw connection | 2.5/0.5/2.5 |
| Tension clamp connection | 1.5/0.5/2.5 |
| | 112.4/22.5 |
| | 112.4/22.5 |
| Note | |

Application

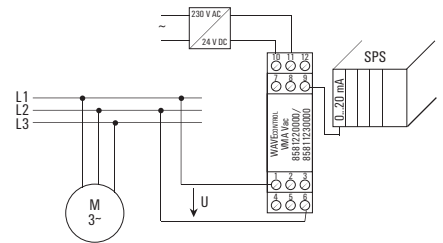

Ordering data

| Type | Qty. | Order No. |
|---------------|------|------------|
| WAS2 VMA V ac | 1 | 8581220000 |
| WAZ2 VMA V ac | 1 | 8581230000 |

Note

Accessories

| | |
|-------------|---|
| Note | Cross-connector for power supplies and markers - refer to Accessories |
|-------------|---|

Isolating converters for serial interfaces

Isolating converters for serial interfaces RS232/ RS485/422 or TTY

Serial interface are used for exchanging data between data processing systems, controllers and peripherals. The WDS2 interface isolating converter is particularly well suited for harsh conditions located near to the process. Versions are available for a variety of industrial applications:

- RS232/RS422 or RS485
- RS232/TTY


The thin (22.5 mm wide) rail-mounted modules come with a 9-pole SUB-D connector for the RS232 connection and a shield connection for the RS485/422 or TTY signal line. In order to ensure high transmission security, the serial interface isolating converters are equipped with high-quality 4-kV 3-way electrical isolation.

- **Easy to service:** the electronic components can be removed from the housing/base without using any tools. The terminating resistor can be selected with DIP switch.
- **High data transmission speeds** up to 115 kBit/s and freely adjustable
- **Secure connection:** 9-pole Sub-D connector for the RS232 interface. For the serial RS485/422 and TTY connection, the user can connect the shield using the LLBU or the EMC Set (1067470000).




RS232/RS485/422

- 3-way isolation
- RS232 connection via SUB-D 9
- RS485/422, shield connection via KLBUE
- Switchable DTE or DCE assignment
- Bi-directional communication

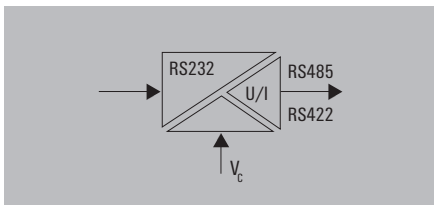

RS232/RS485/422

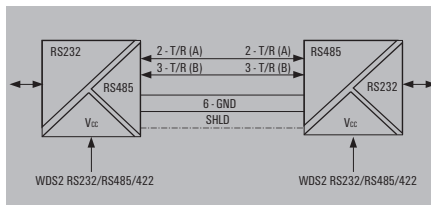

Technical data

| |
|---------------------------------|
| RS232 |
| Connection type / Input current |
| Assignment |
| RS485/422 |
| Terminating resistors |
| Type of connection |
| Bit distortion |
| Bit delay |
| Control of data direction |
| Shield connection |
| Status indicator |
| Transmission rate |
| Transmission channels |
| Transmission distance |
| General data |
| Configuration |
| Supply voltage |
| Power consumption |
| Ambient temperature |
| Approvals |
| Insulation coordination |
| Standards |
| EMC standards |
| Rated voltage |
| Impulse withstand voltage |
| Pollution degree |
| Overvoltage category |
| Clearance & creepage distances |
| Insulation voltage |

| |
|---|
| SUB-D9 (male plug) / |
| DTE/DCE switchable with DIP switch |
| Pull-down/pull-up via DIP switch |
| Screw connection |
| < 5 % |
| ≤ 3 μs |
| Automatic or via RS232 RTS/CTS |
| KLBÜ 4-6/Z1 |
| LED green: supply voltage, TxD, RxD |
| 2.4, 4.8, 9.6, 19.2, 57.6, 115.2 kBaud, 8 bit or 8 bit + parity bit |
| Half-duplex (RS485 2-wire) |
| Full-duplex (RS485 4-wire and RS422) |
| Max. 1200 m twisted pair |
| DIP switch |
| 24 V DC ± 20 % |
| ca. 1.5 W |
| 0 °C...55 °C |
| CE; cULus; EAC; GL |
| DIN EN 50178, DIN EN 61000-4-2 |
| EN 55011, EN 61000-6-2, EN 61000-6-4 |
| between adjacent electric circuits: 300 V |
| between electric circuits and PE: 150 V |
| 4 kV |
| 2 |
| III |
| Between neighbouring circuits: 3 mm |
| Between the circuits and PE: 1.5 mm |
| 2 kV DC / 1 min. |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Depth x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 2.5 / 0.5 / 2.5 |
| / 22.5 / 112.4 |

Ordering data

| |
|------------------|
| Screw connection |
|------------------|

| Type | Qty. | Order No. |
|----------------------|------|------------|
| WDS2 RS232/RS485/422 | 1 | 8615700000 |

| |
|-------------|
| Note |
|-------------|

Accessories


| |
|-------------|
| Note |
|-------------|

| |
|---|
| Cross-connector for power supplies and markers – refer to Accessories |
|---|


Isolating converter for serial interfaces

RS232/TTY

- 3-way isolation
- RS232 connection via SUB-D 9
- TTY shield connection via KLBUE retaining clip
- Switchable DTE or DCE assignment
- Bi-directional communication

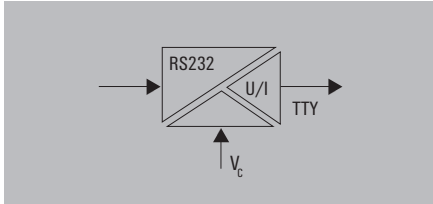

RS232/TTY

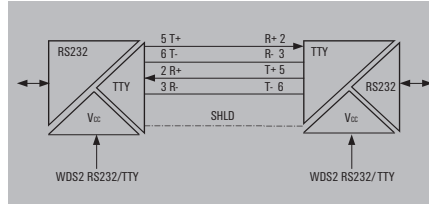

Technical data

RS232

Connection type / Input current

Assignment

TTY

Type of connection

Bit distortion

Bit delay

Load

Shield connection

Status indicator

Transmission rate

Transmission channels

Transmission distance

General data

Configuration

Supply voltage

Power consumption

Ambient temperature

Storage temperature

Approvals

Insulation coordination

Standards

EMC standards

Rated voltage

Impulse withstand voltage

Pollution degree

Overvoltage category

Clearance & creepage distances

Insulation voltage

SUB-D9 (male plug) /

DTE/DCE switchable with DIP switch

Screw connection

< 1.5%

≤ 3 μs

≤ 500 Ω

KLBÜ 4-6/Z1

LED green: supply voltage, TxD, RxD

19.2 kBit/s

Full-duplex

Max. 1000 m twisted pair

DIP switch

24 V DC ± 20 %

ca. 0.8 W

0 °C...55 °C

-20 °C...85 °C

CE; cULus; EAC; GL

DIN EN 50178, DIN EN 61000-4-2

EN 55011, EN 61000-6-2, EN 61000-6-4

between adjacent electric circuits: 300 V

between electric circuits and PE: 150 V

4 kV

2

III

Between neighbouring circuits: 3 mm

Between the circuits and PE: 1.5 mm

2 kV DC / 1 min.

Dimensions

Clamping range (nominal / min. / max.)

Depth x width x height

Note

Screw connection

2.5 / 0.5 / 2.5

/ 22.5 / 112.4

Ordering data

Screw connection

| Type | Qty. | Order No. |
|----------------|------|------------|
| WDS2 RS232/TTY | 1 | 8615690000 |

Note

Accessories

Note

Cross-connector for power supplies and markers – refer to Accessories

Trip amplifier for monitoring AC/DC circuits

| | | |
|---|---|-----|
| Trip amplifier for monitoring AC/DC circuits | Trip amplifier for monitoring AC/DC circuits - Overview | E.2 |
| | WAVESERIES - Limit value monitoring | E.4 |
| | PLUGCONTROL - Current monitoring | E.6 |
| | WAVESERIES - Voltage monitoring | E.8 |

Trip amplifier for monitoring AC/DC circuits

Monitoring AC/DC currents and voltages within single-phase and three-phase power networks.

Some WAVESERIES products provide the function of monitoring voltage and current. Typical uses include low voltage distribution applications. This includes the monitoring of phase voltages and current while controlling actuators. Another application is in monitoring dropouts of a power supply, or accumulators and feed-in systems within industrial production lines. There are many applications for threshold monitoring (trip amplifier) products in process automation. Typically they are used to generate alarms when „out-of-limits“ signals are detected with fill levels, flow quantities or temperature signals.

The PLUGCONTROL series of current monitoring products monitor DC current up to 10 amps. They can be used in applications to monitor the functioning of valves, servo-controls and DC motors. The pluggable detector uses the same socket (base) as Weidmüller PLUGSERIES relays and optos socket base so it uses the same quick-and-easy to use pluggable ZQV cross-connections for saving wiring time. A lever is provided to quickly release or instal the detector.


Features

WAVECONTROL:

- Threshold monitoring of analogue standard signals
- Measuring AC currents ranging from 1 to 30 A
- Monitoring DC and AC voltages up to 400 V
- Fully adjustable switching thresholds
- Relay outputs for monitoring threshold
- Versatile pluggable connection method – screw or spring

PLUGCONTROL:

- Monitoring for DC currents ranging from 0.5 to 10 A
- Very small, pluggable monitoring unit
- Reed relay contact for monitoring and measuring current
- Install on standard base
- Quick initial commissioning – with replaceable electronics
- Minimal wiring effort – with pluggable ZQV 2,5N cross-connector

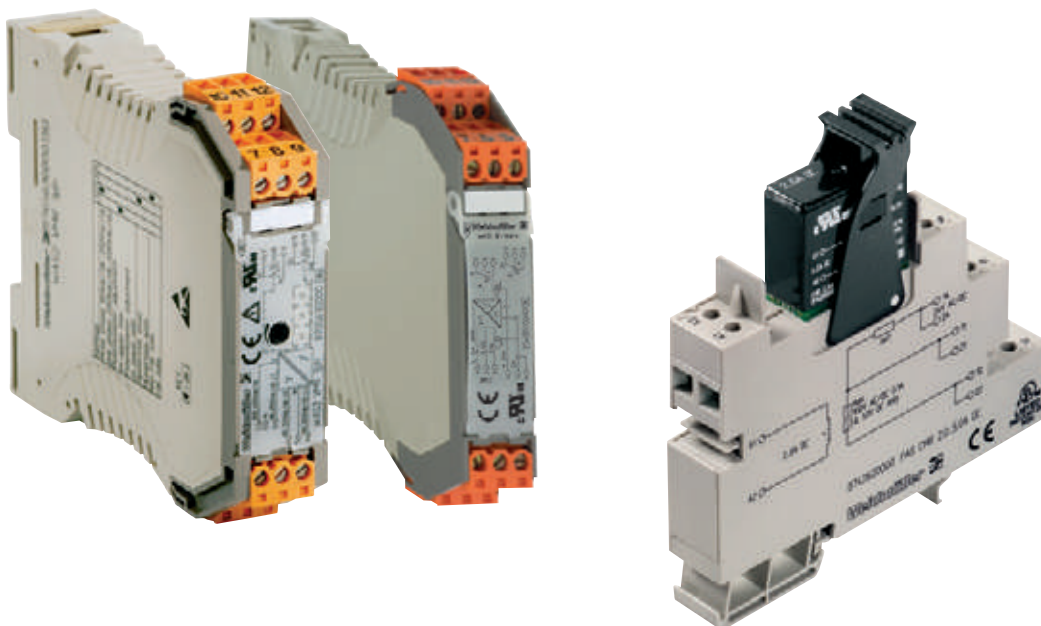



**Threshold monitoring of analogue
standard signals**




Current monitoring




Voltage monitoring

Relay output

- 3-way isolation
- Low trip / high trip
- FAILSAFE / NON-FAILSAFE
- 2 relay outputs 250 V AC / 3 A

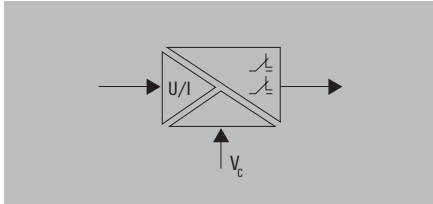

DC/Alarm

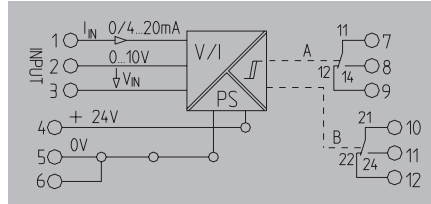

Technical data

| Input | |
|---|--|
| Input voltage | 0...10 V |
| Input current | 0...20 mA |
| Input resistance, voltage/current | ≥ 100 kΩ / ≤ 110 Ω |
| Output | |
| Contact assembly | 2 CO contacts |
| Contact material | AgNi 90/10 |
| Switching thresholds | 1...90 % (independently for channel 1 and channel 2) |
| Hysteresis | 1...10 % (independent for channel 1 and channel 2) |
| Max. switching voltage, AC | 250 V |
| Continuous current | 3 A |
| Function | Open-circuit/closed-circuit principle |
| Temperature coefficient | ≤ 500 ppm/K |
| Status indicator | LED green ON: OK, LED red ON: alarm (per channel) |
| General data | |
| Configuration | DIP switch, Potentiometer |
| Supply voltage | 24 V DC ± 25 % |
| Power consumption | Typically 1 W both relays picked up |
| Current-carrying capacity of cross-connect. | ≤ 2 A |
| Ambient temperature | 0 °C...55 °C |
| Default setting | Channel A/B: low trip and FAILSAFE |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 |
| EMC standards | EN 61000-4-2, -3, -4, -5, -6 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 4 kV |
| Pollution degree | 2 |
| Overvoltage category | III |
| Clearance & creepage distances | ≥ 3 mm |
| Insulation voltage | 2 kV _{eff} / 5 s |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | mm ² |
| Length x width x height | mm |
| Note | |

Ordering data

| | |
|--|--------------------------|
| | Screw connection |
| | Tension-clamp connection |

| Note | |
|------|--|
|------|--|

Accessories

| Note | |
|------|--|
|------|--|

| Screw connection | | Tension clamp connection | |
|------------------|---|--------------------------|---|
| 2.5/0.5/2.5 | 1 | 1.5/0.5/2.5 | 1 |
| 92.4/17.5 | 1 | 92.4/17.5 | 1 |

| Type | Qty. | Order No. |
|---------------|------|------------|
| WAS5 DC/Alarm | 1 | 8543820000 |
| WAZ5 DC/Alarm | 1 | 8543880000 |

| Note | |
|------|--|
|------|--|



| Note | |
|------|--|
|------|--|

Switch position/setting options

| function | SW 1 | | | |
|---------------------------|------|---|---|---|
| | 1 | 2 | 3 | 4 |
| Channel A High Trip | ■ | | | |
| Channel A Low Trip | □ | | | |
| Channel B High Trip | | ■ | | |
| Channel B Low Trip | | □ | | |
| FAILSAFE, Channel 1 & 2 | | | □ | □ |
| NON FAILSAFE, Chan. 1 & 2 | | | ■ | ■ |

- = on
- = off
- NON FAILSAFE: The relay picks up when the alarm is triggered
- FAILSAFE: The relay drops out when the alarm is triggered. An alarm is also triggered in the FAILSAFE mode, if for example, the operating voltage to the modules fails
- Low Trip: Alarm is triggered if the signal is under the threshold.
- High Trip: Alarm is triggered if the signal is over the threshold.
- Signal threshold: Adjustments of the signal threshold (1...90%) are made for channel 1 with the potentiometer P1, and separately for channel 2 via potentiometer P2.
- Hysteresis: Adjustments of the hysteresis (1...10%) are made for channel 1 with the potentiometer P3, and separately for channel 2 via potentiometer P3.


WAVEANALOG DC/Alarm - Alarm indication

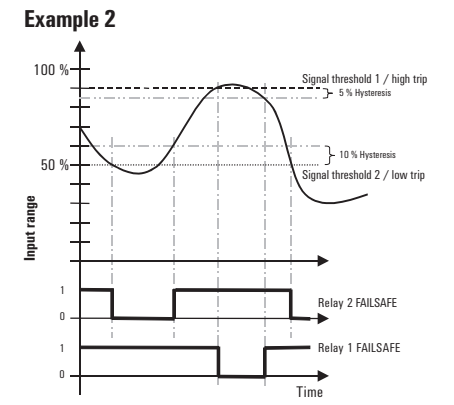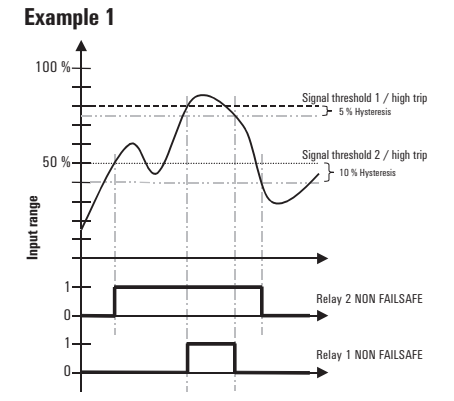


Relay output

- Monitors currents up to 10 A DC
- Used with valves, servo-controls or DC motors
- Pull-up / pull-down resistor 4.7 kΩ

PAS CMR 0.5...2.5 A DC



PAS CMR 2.0...5.0 A DC



Technical data

| Input | |
|---|---|
| Input current | 0.5...2.5 A DC |
| Max. current | 7.5 A for 10 s |
| Making current threshold | ≤ 500 mA |
| Input resistance, current | < 50 mΩ |
| Secure off | ≤ 50 mA |
| Pulse duration | min. 1 ms |
| Output | |
| Switching current | 100 mA |
| Switching voltage AC / Switching voltage DC | / 1 V...100 V1 V...100 V |
| Max. switching frequency | 15 Hz |
| Contact assembly | 1 NO contact |
| Contact material | RH/Rd (Reed contact)* |
| General data | |
| Configuration | none |
| Ambient temperature | 0 °C...55 °C |
| Humidity | 5-95% rel. humidity, T _v = 40°C, no condensation |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 (secure separation) |
| EMC standards | EN 55011, EN 61000-6-1, 2, 3, 4 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 6 kV |
| Insulation voltage | 4 kV _{eff} / 1 min. |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 5 mm (grout encapsulated) |

| Input | |
|---|---|
| Input current | 0.5...2.5 A DC |
| Max. current | 7.5 A for 10 s |
| Making current threshold | ≤ 500 mA |
| Input resistance, current | < 50 mΩ |
| Secure off | ≤ 50 mA |
| Pulse duration | min. 1 ms |
| Output | |
| Switching current | 100 mA |
| Switching voltage AC / Switching voltage DC | / 1 V...100 V1 V...100 V |
| Max. switching frequency | 15 Hz |
| Contact assembly | 1 NO contact |
| Contact material | RH/Rd (Reed contact)* |
| General data | |
| Configuration | none |
| Ambient temperature | 0 °C...55 °C |
| Humidity | 5-95% rel. humidity, T _v = 40°C, no condensation |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 (secure separation) |
| EMC standards | EN 55011, EN 61000-6-1, 2, 3, 4 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 6 kV |
| Insulation voltage | 4 kV _{eff} / 1 min. |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 5 mm (grout encapsulated) |

| Input | |
|---|---|
| Input current | 2...5.0 A DC |
| Max. current | 15 A for 10 s |
| Making current threshold | ≤ 2 A |
| Input resistance, current | < 50 mΩ |
| Secure off | ≤ 300 mA |
| Pulse duration | min. 1 ms |
| Output | |
| Switching current | 100 mA |
| Switching voltage AC / Switching voltage DC | / 1 V...100 V1 V...100 V |
| Max. switching frequency | 15 Hz |
| Contact assembly | 1 NO contact |
| Contact material | RH/Rd (Reed contact)* |
| General data | |
| Configuration | none |
| Ambient temperature | 0 °C...55 °C |
| Humidity | 5-95% rel. humidity, T _v = 40°C, no condensation |
| Approvals | CE; cULus; EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 (secure separation) |
| EMC standards | EN 55011, EN 61000-6-1, 2, 3, 4 |
| Rated voltage | 300 V |
| Impulse withstand voltage | 6 kV |
| Insulation voltage | 4 kV _{eff} / 1 min. |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 5 mm (grout encapsulated) |

| Dimensions | |
|--|-----------------|
| Clamping range (nominal / min. / max.) | 1.5 / 2.5 / 2.5 |
| Length x width x height | 92 / 15.3 / |
| Note | |

| Screw connection | |
|---|-----------------|
| Clamping range (nominal / min. / max.) | 1.5 / 2.5 / 2.5 |
| Length x width x height | 92 / 15.3 / |
| Note | |
| * The peak current should be limited to 100 mA when under capacitive loads. | |

| Screw connection | |
|---|-----------------|
| Clamping range (nominal / min. / max.) | 1.5 / 2.5 / 2.5 |
| Length x width x height | 92 / 15.3 / |
| Note | |
| * The peak current should be limited to 100 mA when under capacitive loads. | |

Ordering data

| |
|------------------|
| Screw connection |
|------------------|

| Type | Qty. | Order No. |
|------------------------|------|------------|
| PAS CMR 0.5...2.5 A DC | 10 | 8742610000 |

| Type | Qty. | Order No. |
|------------------------|------|------------|
| PAS CMR 2.0...5.0 A DC | 10 | 8742620000 |

| Note | |
|------|--|
|------|--|

| Note | |
|------|--|
|------|--|

| Note | |
|------|--|
|------|--|

Accessories

| Note | |
|------|--|
|------|--|


| | |
|--|--|
| Cross-connectors and markers - refer to WAVESERIES accessories | |
|--|--|

| | |
|--|--|
| Cross-connectors and markers - refer to WAVESERIES accessories | |
|--|--|

Relay output

- Monitors currents up to 10 A DC
- Used with valves, servo-controls or DC motors
- Pull-up / pull-down resistor 4.7 kΩ

PAS CMR 4.5...10 A DC



Technical data

Input

Input current
 Max. current
 Making current threshold
 Input resistance, current
 Secure off
 Pulse duration

4.5...10 A DC
 30 A for 10 s
 $\leq 4,5$ A
 < 50 mΩ
 ≤ 600 mA
 min. 1 ms

Output

Switching current
 Switching voltage AC / Switching voltage DC
 Max. switching frequency
 Contact assembly
 Contact material

100 mA
 / 1 V...100 V1 V...100 V
 15 Hz
 1 NO contact
 RH/Rd (Reed contact)*

General data

Configuration
 Ambient temperature
 Humidity
 Approvals

none
 0 °C...55 °C
 5-95% rel. humidity, $T_v = 40^\circ\text{C}$, no condensation
 CE; cULus; EAC

Insulation coordination

Standards
 EMC standards
 Rated voltage
 Impulse withstand voltage
 Insulation voltage
 Overvoltage category
 Pollution degree
 Clearance & creepage distances

DIN EN 50178 (secure separation)
 EN 55011, EN 61000-6-1, 2, 3, 4
 300 V
 6 kV
 4 kV_{eff} / 1 min.
 III
 2
 ≥ 5 mm (grout encapsulated)

Dimensions

Clamping range (nominal / min. / max.)
 Length x width x height

Screw connection

1.5 / 2.5 / 2.5
 92 / 15.3 / 95

Note

* The peak current should be limited to 100 mA when under capacitive loads.

Ordering data

Screw connection

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| PAS CMR 4,5...10 A DC | 10 | 8742630000 |

Note


Accessories

Note

Cross-connectors and markers - refer to WAVESERIES accessories


Relay output

- 3-way isolation
- Monitoring of single-phase systems up to 260 V AC/DC
- 4 input ranges per DIP switch can be selected
- 1 relay module with CO contact
- Switchable hysteresis
- Switch adjusted via potentiometer
- Reset input

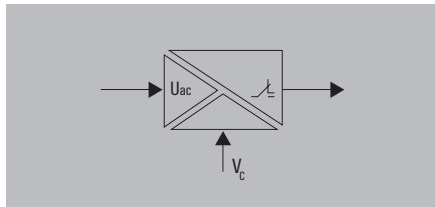

VMR V AC / DC

Single-phase

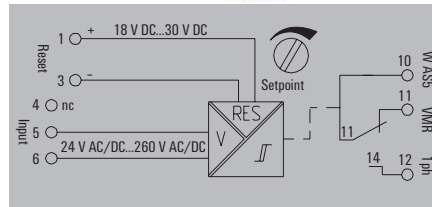

Technical data

| Input | |
|--|--|
| Input voltage | 24...70 / 70...140 / 140...210 / 210...260 V AC / DC |
| Input frequency | 50...60 Hz |
| Max. voltage | 260 V AC / DC |
| Output | |
| Max. switching voltage, AC | 250 V |
| Switching current | 8 A |
| Continuous current | 3 A |
| Hysteresis | 24...70 V AC, small = 5 V / large = 10 V, 70-260 VAC, small = 8 V / large = 16 |
| Temperature coefficient | ≤ 250 ppm/K |
| Step response time | < 300 ms |
| Repeat accuracy | < 0.3 % of set range |
| Status indicator | LED green = OK / LED yellow/red = alarm status |
| General data | |
| Supply voltage | from the measuring circuit |
| Reset input voltage, min./max. | 18 V DC / 30 V DC |
| Pulse duration | ≥ 700 ms |
| Configuration | DIP switch, Potentiometer, Alarm status reset via reset input or button |
| Default setting | DIP switches: ON = 1,2,5,8 / OFF = 3,4,6,7 |
| Ambient temperature | -10 °C...55 °C |
| Storage temperature | -20 °C...70 °C |
| Approvals | CE, cULus, EAC |
| Insulation coordination | |
| Standards | DIN EN 50178 |
| EMC standards | EN 55011, EN 61000-6, EN 61326 |
| Rated voltage | input/output, input/reset input, reset input/output: 300 V |
| Impulse withstand voltage | Input/output, input/reset input, reset input/output: 4 kV |
| Insulation voltage | 2 kV _{eff} |
| Overvoltage category | III |
| Pollution degree | 2 |
| Clearance & creepage distances | ≥ 3 mm |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 2.5 / 0.5 / 2.5 |
| Length x width x height | 96.5 / 17.5 / |
| Note | |

Ordering data

Screw connection

Note

Accessories

Note

| Type | Qty. | Order No. |
|--------------|------|------------|
| WAS5 VMR 1ph | 1 | 8705640000 |

| | | |
|--------------|------|------------|
| Type | Qty. | Order No. |
| WAS5 VMR 1ph | 1 | 8705640000 |

Markers - refer to Accessories.

Table of setting options

| Input | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---------------------------|---|---|---|---|---|---|---|---|
| 24 V AC/DC...70 V AC/DC | | | | ■ | □ | □ | □ | □ |
| 70 V AC/DC...140 V AC/DC | | | | □ | □ | □ | □ | ■ |
| 140 V AC/DC...210 V AC/DC | | | | □ | □ | ■ | □ | |
| 210 V AC/DC...260 V AC/DC | | | | □ | ■ | □ | □ | |
| Trip | | | | | | | | |
| High Trip | | | | | | | | ■ |
| Low Trip | | | | | | | | □ |
| Memory | | | | | | | | |
| Memory on | | | | | | | | □ |
| Memory out | | | | | | | | ■ |
| Hysteresis | | | | | | | | |
| Hysteresis small | | | | | | | | □ |
| Hysteresis large | | | | | | | | ■ |
| Input voltage | | | | | | | | |
| AC voltage | | | | | | | | ■ |
| DC voltage | | | | | | | | □ |

■ = on
□ = out

Status indicator

- Set value not exceeded.
- ⊗ Alarm status.
- ⊗ Alarm status can be reset because set value has been exceeded.

Abb.1: Overvoltage monitoring

Alarm set to "high trip"
(Set permanently to closed-circuit principle.)


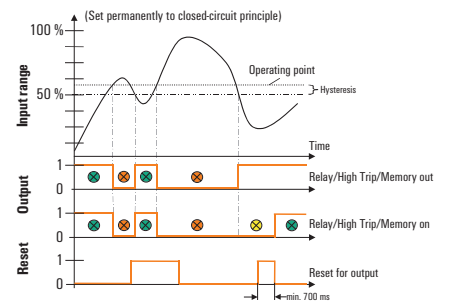



Abb.2: Undervoltage monitoring

Alarm set to "low trip"
(Set permanently to closed-circuit principle.)

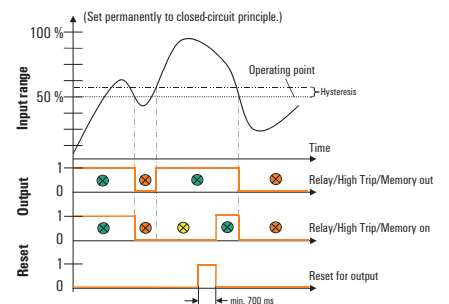


Relay output

- 2-way isolation
- Monitoring of 1- and 3-phase systems from 80 to 400 V AC/DC
- Adjustable by DIP switches
- Monitoring of low and surge voltages
- Detects loss of phase
- 2 relay modules with CO contact

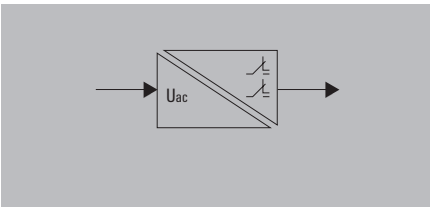

VMR V AC

Three-phase

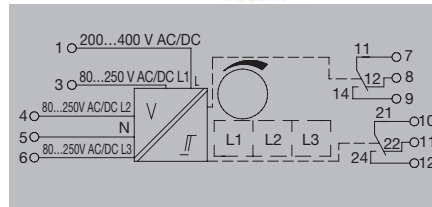

Technical data

Input

Input voltage
Input current

Output

Contact assembly
Max. switching voltage, AC
Continuous current
Hysteresis
Temperature coefficient
Step response time
Repeat accuracy
Status indicator

General data

Configuration

Supply voltage
Default setting
Ambient temperature
Approvals

Insulation coordination

Standards
EMC standards
Rated voltage
Impulse withstand voltage
Insulation voltage
Overvoltage category
Pollution degree
Clearance & creepage distances

Dimensions

Clamping range (nominal / min. / max.)
Length x width x height

Note

Ordering data

Screw connection

Note

Accessories

Note

Technical data

200...400 V AC/DC 1~, 80...250 V AC/DC 3~
< 10 mA DC; 15 mA AC

2 CO contacts

250 V

3 A

5% of final value

≤ 300 ppm/K

< 300 ms

< 0.3 % of set range

Green LED

DIP switch, Potentiometer, Alarm status reset via reset input or button

from the measuring circuit

DIP switches: ON = 1,2,4 / OFF = 3

0 °C...50 °C

CE; cULus; EAC

DIN EN 50178

EN 55011, EN 61000-6, EN 61326

600 V

6 kV

4 kV_{eff} / 1 min.

III

2

Output circuit: 1.8 mm; input circuit, output circuit 1/output circuit 2: 3 mm; input/output: 5.5 mm

Screw connection

2.5 / 0.5 / 2.5
96.5 / 22.5 /

| Type | Qty. | Order No. |
|--------------|------|------------|
| WAS2 VMR 3ph | 1 | 8705630000 |

Markers - refer to Accessories.

Table of setting options

| Input | 1 | 2 | 3 | 4 |
|-----------------------------------|---|---|---|---|
| 3 phases 80 V AC/DC...250 V AC/DC | | ■ | | |
| 1 phase 200 V AC/DC...400 V AC/DC | | | □ | |
| Limit value | | | | |
| Setting to upper switching point | ■ | | | |
| Setting to lower switching point | | □ | | |
| Hysteresis | | | | |
| Hysteresis, small | | ■ | | |
| Hysteresis, large | | | □ | |
| Fault tolerance | | | | |
| Operating current method | | | | ■ |
| Closed-circuit current method | | | | □ |

■ = on
□ = off

Status indicator

⊗ Voltage is in set range

Fig. 1: Overvoltage and undervoltage monitoring, example of setting

- 3-phase monitoring
- Setting limit value to upper operating point: 230 V Hysteresis 5% = -12.5 V
- Lower operating point 10% less 230 V - 25 V = 205 V Hysteresis 5% = + 12.5 V
- The device operates with the operating current principle.
- All 3 phases monitored in parallel


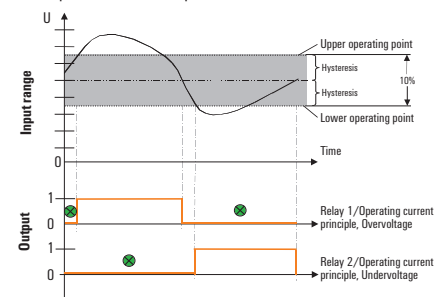


Fig. 2: Overvoltage and undervoltage monitoring, example of setting

- 3-phase monitoring
- Setting limit value to lower operating point: 150 V Hysteresis 5% = +12.5 V
- Upper operating point 20% greater 150 V + 50 V = 200 V Hysteresis 5% = -12.5 V
- The device operates with the closed-circuit current principle.
- All 3 phases monitored in parallel

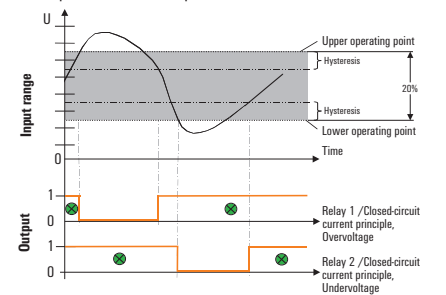

Indicators and configurable displays

| | | |
|---|---|------|
| Indicators and configurable displays | Overview | F.2 |
| | Process value displays with LED display | F.4 |
| | Process value displays with LCD display | F.20 |


Indicators and configurable displays

In industrial and process automation, displays provide a visual rendering of data and an digital presentation of electrical and non-electrical measurements. They provide essential diagnostics, logging and operational guidance when operating machines and facilities.

Displays make dialogue-based operations possible. They show measurements, error messages and also allow processes to be monitored. Displays can also feature digital and analogue outputs, interference-suppression functions, or the ability to calculate certain process variables internally. This turns a simple display into a high-quality process interface capable of independently controlling sub-processes.


F





All-purpose

A fitting solution for any application – with a multitude of input ranges, external or input loop-powered supply, and analogue or digital outputs.



Security

No additional signal isolation is required since there is a high insulation voltage.



Saves time

Easy push-button configuration.



Protection

IP 65 protection allows for use in harsh industrial conditions.

F



Flow rate or volume monitoring with LED display



Process value indication with LCD display

Counters

PTX800 SERIES

Panel-mounted totaliser/counter/rate monitors

The configurable monitors of the PTX800 SERIES are available in two designs:

- PTX800A for analogue (mA, Volts) inputs
- PTX800D with digital pulse inputs (NAMUR, NPN/PNP sensors, TTL, etc)

The eight-digit LED rate/total display can be changed via a button on the front of the unit. Both versions make use of output relays to close valves when the "total" setpoint is reached. They also have electrically-isolated analogue outputs for re-transmission.



The display can be globally scaled based on the flow quantity per second, minute, hour or day. The flow-quantity counter can be multiplied by factors of 0.001, 0.01, 0.1, 1, 10, 100 or 1000. This allows for best use of the display.

The PTX800A counter processes standardised analogue current and voltage signals. Linearisation and filtering functions are available for processing measurement signals. In addition, the counter has a 24 V DC power supply for loop-powered sensors.

The PTX800D can be connected on the input side to all standard initiators (NPN/PNP/Namur) and with other current/voltage transmitters. The monitor will accept any periodic signal type and can total the input pulses into a "total" display.

It can also calculate the resulting flow rate. External proximity switches can be supplied with 12 V DC directly from the PTX800D.

Typical application of PTX800

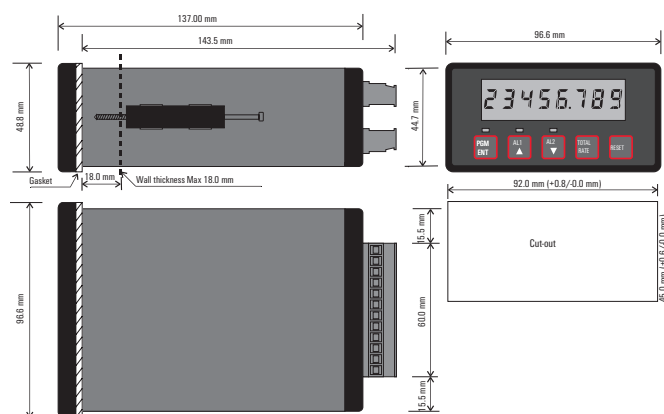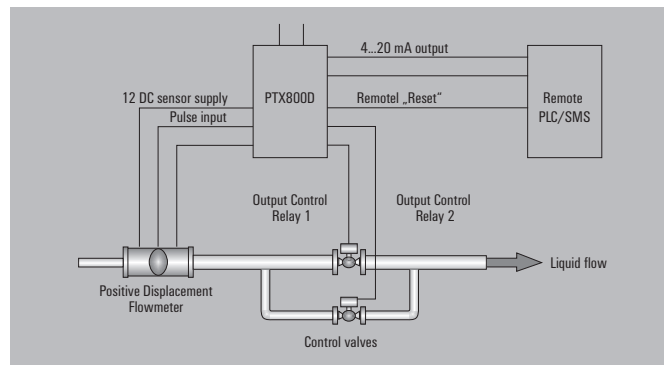

Technical Features

- Display of the flow quantity/rate
- Easily-readable eight-digit LED display
- Up to two outputs for alarm monitoring or control
- Optional analogue output
- Pulse output
- Reset function can be controlled locally or remotely, for fill-quantity monitoring (batching)
- The most recent measured value is stored in case of a power outage
- DC power supply
- LED display for values outside of range
- Complete electrical isolation
- DIN-standard 1/8 front panel with IP 65 protection
- Integrated power supply for initiators
- Changing the device configuration is possible without performing a new calibration
- No internal adjustments needed

Common technical data

| Display | |
|---|---|
| Type | Eight digits, red LED, 7.2 mm |
| Brightness | Adjustable to 14 levels of brightness |
| Display value | Percent or real-value displayed |
| Partial display | Display from 0 to 50,000 (five digits) |
| Time range, partial display | per sec., min., hour (PT800A also per day) |
| Total display | Display from 0 to 99,999,999 (8 digits) |
| Decimal point | Adjustable separately for partial and total display |
| Status indicator | Alarm 1/2; Status LED |
| Pulse output | |
| Type | Transistor output |
| Display value | One pulse per signal jump of the total display |
| Pulse duration | 32 ms |
| Cut-off time | Minimum of 32 ms |
| Analogue output (optional) | |
| Type | Current or voltage output configurable with jumper |
| Display range | Dependent on the calibration (within 0 to 22 mA, or 0 to 11 V) |
| Resolution | 1.6 μ A or 0.8 mV / Bit |
| Load resistance, current | $\leq 900 \Omega$ |
| Load resistance, voltage | $\geq 1 \text{ k}\Omega$ |
| Residual ripple | $< 20 \text{ mV}_{\text{ss}}$ |
| Alarm output (optional) | |
| Type | 2 relay contacts (CO) |
| Switching current | 3 A at 240 V AC, 5 A at 24 V DC / 110 V AC (resistive load) |
| Isolation | 1.5 kV between ports |
| Input reset | |
| Type | Normally open |
| Function | Complete reset (display/alarm) |
| General information | |
| Supply voltage | 24 V DC $\pm 10 \%$ |
| Power consumption | 6 W at 24 V DC |
| Accuracy | $< 0.05 \%$ |
| Linearity | $< 0.05 \%$ |
| Repeat accuracy | $\pm 0.02 \%$ of signal range |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | $< 0.02 \%$ of signal range |
| Long-term drift | 0.1 % / 10,000 h |
| Impulse withstand voltage | 4 kV (1.2/50 μ s) |
| Ambient temperature (operational)/storage temperature | 0 °C...60 °C / -25 °C...70 °C |

Connections


| Terminal | Signal | |
|----------|-----------------------------|----------------------------|
| 1 | L+ | Supply voltage |
| 2 | L- | |
| 3 | Signal + | Analogue output (optional) |
| 4 | Signal - | |
| 5 | 0 V | Pulse output |
| 6 | Pulse | |
| 7 | Optional, depending on type | Inputs |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | NO contacts | Alarm channel 1 (optional) |
| 13 | | |
| 14 | NC contact | Alarm channel 2 (optional) |
| 15 | NO contacts | |
| 16 | Common | |
| 17 | NC contact | |
| 18 | | |

Process value displays with LED display

PTX800 Series

Counter and totaliser with additional functionality and limit-value monitoring

- Installation in control panels
- Pluggable connection terminals
- Scalable impulse and frequency counters for digital input signals
- Suitable on input side for all standard initiators

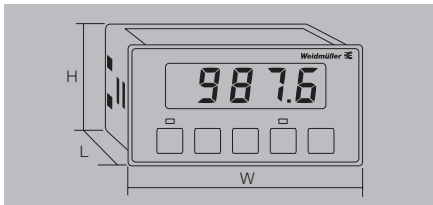


Technical data

| |
|-----------------------------------|
| Input |
| Type |
| Input signal |
| Sensor supply |
| Input voltage |
| Total display, display range |
| Analogue output (optional) |
| Type (analogue output) |
| Input reset |
| Pulse duration, min. |
| Pulse output |
| Pulse rate, max. |
| General data |
| Type |
| EMC standards |
| Approvals |

PTX800D

Digital pulse input

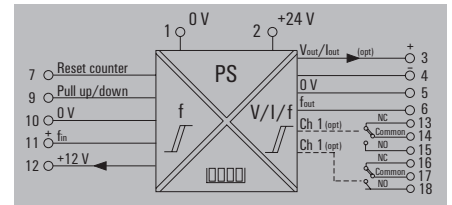

Connections

| Terminal | Signal | |
|----------|---|---------------|
| 7 | Reset by connection to class 12 | Reset |
| 8 | Setup configuration by connection to class 12 | Configuration |
| 9 | Pull Up / Down | |
| 10 | Signal - / 0 V | |
| 11 | Signal + | |
| 12 | 12 V DC | |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Length x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 1.5 / 0.5 / 2.5 |
| 137 / 96.6 / 48.8 |

Ordering data

| | |
|--|---------------------------------|
| | with analogue/alarm output |
| | without analogue / alarm output |

| Type | Qty. | Order No. |
|---------------|------|------------|
| PTX800D RO/AO | 1 | 7940012323 |
| PTX800D | 1 | 7940011133 |

| |
|-------------|
| Note |
|-------------|


Accessories

| |
|-------------|
| Note |
|-------------|

PTX800 Series

Counter and totaliser with additional functionality and limit-value monitoring

- Installation in control panels
- Pluggable connection terminals
- Configurable for analogue current and voltage signals
- Linearisation and interference suppression
- Power supply for external sensors

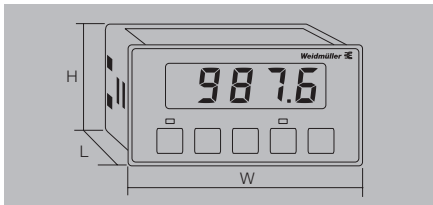

Technical data


| |
|-----------------------------------|
| Input |
| Type |
| Input signal |
| Sensor supply |
| Resolution |
| Input resistance |
| Total display, display range |
| Analogue output (optional) |
| Type (analogue output) |
| Input reset |
| Pulse duration, min. |
| Pulse output |
| Pulse rate, max. |
| General data |
| Type |
| EMC standards |
| Approvals |

PTX800A

Analogue current input / voltage input



| |
|--|
| Conversion of linear/quadratic input signals into analogue signals |
| -24...+24 mA / -11...+11 V |
| 24 V DC (up to 25 mA) |
| 0.6 μ , A / 0.3 mV |
| 22 Ω (current input); 1 M Ω (voltage input) |
| 0,001; 0,01; 0,1; 1; 10; 100; 1000 |
| Current of voltage output, configured with jumper |
| 250 ms |
| 15 / s |
| RO/AO version with 1 analogue output and 2 alarm outputs |
| DIN EN 61326 |
| CE; cULus; EAC |

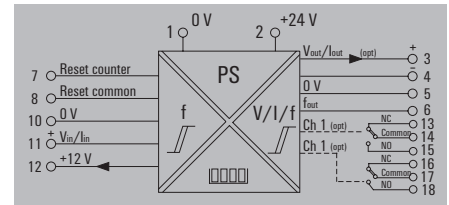

Connections

| Terminal | Signal | |
|----------|--|---------------|
| 7 | Reset by connection to class Kl. 8 | Reset |
| 8 | Common | |
| 9 | Setup configuration by connection to class 8 | Configuration |
| 10 | Signal - / 0 V | Inputs |
| 11 | Signal + | |
| 12 | 24 V DC | |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Length x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 1.5 / 0.5 / 2.5 |
| 137 / 96.6 / 48.8 |

Ordering data

| |
|---------------------------------|
| with analogue/alarm output |
| without analogue / alarm output |

| Type | Qty. | Order No. |
|----------------------|------|------------|
| PTX800A 4-20mA/RO/AO | 1 | 7940014374 |
| PTX800A 4-20mA | 1 | 7940010243 |

| |
|-------------|
| Note |
|-------------|

Accessories

| |
|-------------|
| Note |
|-------------|

Indicators and configurable displays for analogue signals

PMX420 SERIES

Universal, 4-digit, current/voltage displays

The current/voltage displays of the PMX420 SERIES are available as a pure display unit or optionally with analogue outputs/4 alarm outputs.

The basic model is suitable for displaying a wide range of bipolar mA or voltage signals. Inputs are isolated from the power supply. An integrated power source is available for supplying external sensors and transmitters.



The PMX420 Plus adds four alarm channels (each with its own status indicator and relay contact outputs) and a fully isolated analogue current/voltage output.

Device functions can be configured, specifically for the application, using the integrated keypad on the front panel. There are also several other handy features like maximum and minimum value recall, integrated linearisation, an acoustic alarm, a group alarm function, and the option for manual or automatic alarm reset.

Technical features:

- 4-digit LED display
- Suitable for current and voltage signals
- Bipolar inputs
- Integrated square root function
- Retrieval of min. and max. values
- Integral power supply for active sensors
- DC power supply
- Complete electrical isolation
- Four alarm channels and an analogue current/voltage output (PMX420 Plus)
- LED alarm status indication
- DIN-standard 1/8 front panel with IP 65 protection
- Decimal point can be adjusted to any position
- Configurable via front-panel keypad

Typical application of PMX420 Plus

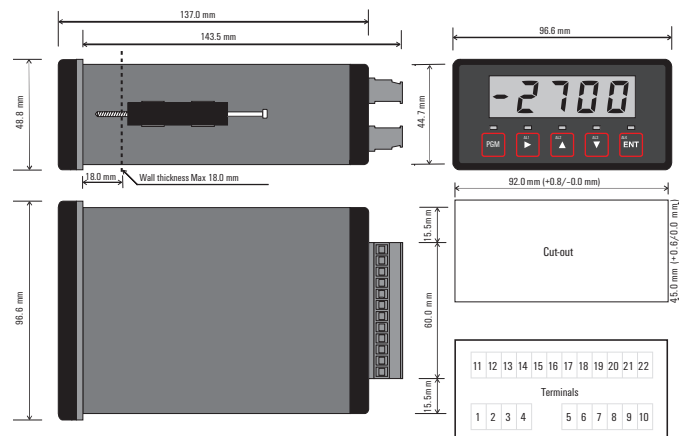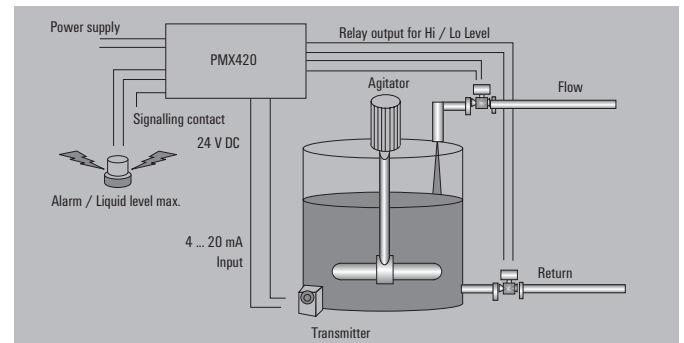

Common technical data

| Display | |
|---|--|
| Type | 4 Digits, red LED, 14.2 mm |
| Display value | Percent or real-value displayed |
| Display range | 9999 to +9999 |
| Status indicator | Alarm channel 1-4; status LED |
| Input | |
| Type | Current or voltage input is programmable |
| Input current limits | -22...+22 mA (preset for 4...20 mA) |
| Input voltage limits | -11...+11 V |
| Input resistance | 25 Ω (current input) or 1.5 MΩ (voltage input) |
| Resolution | 4 μA / 2 mV |
| Sensor current | 4...20 mA |
| Feed voltage | 24 V DC ±1.5 V DC (bis 25 mA) |
| Attenuation factor | 0...99; programmable digital filter |
| Functions | |
| Values | Linear or $\sqrt{\quad}$ |
| General information | |
| Supply voltage | 18...50 V DC, other voltages on request |
| Power input | 8.5 W @ 24 V DC |
| Accuracy | Typically ± 0.1 % of signal range |
| Linearity | < 0.05 % |
| Repeat accuracy | ±0.02 of signal range |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | < 0.02 % / °C at 100 % |
| Long-term drift | 0.1 % / 10.000 h |
| Cut-off frequency (-3 dB) | 5 Hz |
| Step response time | 300 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1,2/50 μs) |
| Isolation voltage | 2 kV input / output / power supply |
| Data backup | > 10 years without power supply |
| Ambient temperature (operational)/storage temperature | 0 °C...60 °C / -25 °C...+70 °C |
| EMC standard | DIN EN 61326 |
| Approvals | CE, cULus |

Connections


| Terminal | Signal | |
|----------|------------------------|--------------------|
| 1 | - | Supply voltage |
| 2 | + | High level |
| 3 | + | Supply voltage |
| 4 | - | Low level |
| 5 | Signal + sensor supply | Inputs |
| 6 | Configuration | |
| 7 | Signal + voltage input | |
| 8 | Signal + current input | |
| 9 | Signal 0 V | |
| 10 | Not used | |
| 11 | NC contact | Alarm channel 1 |
| 12 | Common | (only PMX-420Plus) |
| 13 | NO contacts | |
| 14 | NC contact | Alarm channel 2 |
| 15 | Common | (only PMX420Plus) |
| 16 | NO contacts | |
| 17 | NO contacts | Alarm channel 3 |
| 18 | Common | (only PMX420Plus) |
| 19 | NO contacts | Alarm channel 4 |
| 20 | Common | (only PMX420Plus) |
| 21 | Signal + | Analogue Output |
| 22 | Signal - | (only PMX420Plus) |

Process value monitoring with LED display

PMX420 Series

Universal, 4-character current/voltage display

- Display instrument for control panel installation
- Pluggable connection terminals
- 4-character, scalable display
- Simple menu-driven configuration

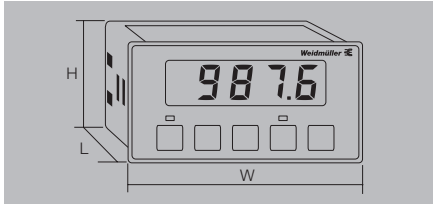

Technical data

Alarm

Type
Scaling
Output current
Output voltage
Transmit function
Load impedance, voltage/current

Residual ripple

Alarm


Type

Number of channels
Type of contact
Switching current

Insulation voltage
Leakage current quenching

PMX420Plus

Display with analogue output and 4 alarm channels



Adjustable output for current or voltage

Variable

0...22 mA

0...11 V

direct or inverted

850 Ω @ 20 mA (current output) / < 500 Ω (voltage output)

≤ 20 mV_{ss}

Internal Alarm via LED or output signal to external controller

4


2 CO contact und 2 NO contacts

5 A @ 240 V AC,

10 A @ 24 V DC

2 kV input / power supply

internal

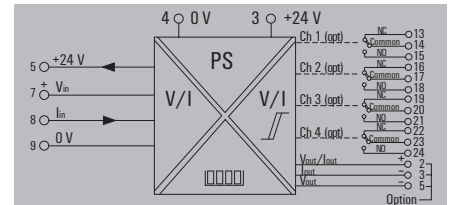

Connections

| Terminal | Signal | |
|----------|------------------------|-----------------|
| 1 | - | Supply voltage |
| 2 | + | High level |
| 3 | + | Supply voltage |
| 4 | - | Low level |
| 5 | Signal + sensor supply | Inputs |
| 6 | Configuration | |
| 7 | Signal + voltage input | |
| 8 | Signal + current input | |
| 9 | Signal 0 V | |
| 10 | Not used | |
| 11 | NC contact | Alarm channel 1 |
| 12 | Common | |
| 13 | NO contacts | Alarm channel 2 |
| 14 | NC contact | |
| 15 | Common | Alarm channel 3 |
| 16 | NO contacts | |
| 17 | NO contacts | Alarm channel 4 |
| 18 | Common | |
| 19 | NO contacts | Alarm channel 4 |
| 20 | Common | |
| 21 | Signal + | Analogue Output |
| 22 | Signal - | |

Dimensions

Clamping range (nominal / min. / max.)
Length x width x height

Note

Screw connection

1.5 / 0.5 / 2.5
137 / 96.6 / 48.8

Ordering data

Voltage input/Current input

| Type | Qty. | Order No. |
|------------|------|------------|
| PMX420Plus | 1 | 7940018957 |

Note


Accessories

Note

PMX420 Series


Universal, 4-character current/voltage display

- Display instrument for control panel installation
- Pluggable connection terminals
- 4-character, scalable display
- Simple menu-driven configuration

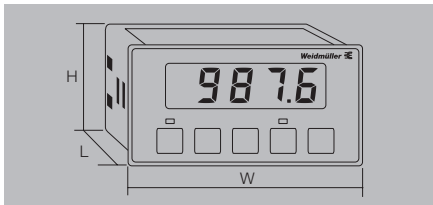

PMX420

Display

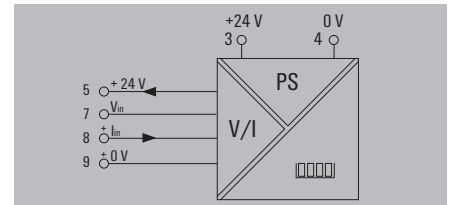

Technical data

| Display | |
|--|--|
| Type | 4-digit, red LED, 14.2 mm |
| Scaling | |
| Display range | -9999...9999 |
| Status indicator | |
| Inputs | |
| Type | Adjustable input for current or voltage |
| Input current | -22...+22 mA (preset to 4...20 mA) |
| Input resistance | 25 Ω (current input) or 1.5 MΩ (voltage input) |
| Resolution | 4 μA / 2 mV |
| Sensor current | 4...20 mA |
| Current output | |
| Transfer functions | |
| Power supply | |
| Supply voltage | 18...50 V DC, other voltages on request |
| Input | |
| Attenuation factor | 0...99, programmable digital filter |
| General data | |
| Sampling rate | |
| Linearity | < 0.05 % |
| Repeat accuracy | |
| Temperature coefficient | |
| Long-term drift | 0.1 % / 10.000 h |
| Cut-off frequency (-3 dB) | 5 Hz |
| Step response time | |
| Insulation coordination | |
| Rated voltage | |
| Overvoltage category | |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 2 kV input / power supply |
| Ambient temperature (operational) | 0 °C...60 °C |
| Storage temperature | -25 °C...70 °C |
| Pollution degree | |
| Humidity | 0...90 % (no condensation) |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|--------|------|------------|
| PMX420 | 1 | 7940018956 |

Note

Accessories

Note

Connections

| Terminal | Signal | |
|----------|------------------------|----------------|
| 1 | - | Supply voltage |
| 2 | + | High level |
| 3 | + | Supply voltage |
| 4 | - | Low level |
| 5 | Signal + sensor supply | Inputs |
| 6 | Configuration | |
| 7 | Signal + voltage input | |
| 8 | Signal + current input | |
| 9 | Signal 0 V | |
| 10 | Not used | |

Indicators and configurable displays for temperature

PMX400 SERIES

Four-digit temperature and frequency displays with analogue-value read-out and alarm monitoring

The PMX400 SERIES consists of two modules:



- Temperature display
- Frequency display / tachometer

A variety of temperature or frequency signals can be processed. On the output side, optional analogue signals are available, as well as either two or four relay contacts for alarm monitoring. The PMX400 HZX frequency display module offers, as default, two open-collector outputs as the relay contacts. The outputs are designated for the alarm function. An integrated power supply can be used for supplying external sensors and input devices.

Technical features:

- Four-digit digital LED display
- Up to four alarm channels and an analogue current/voltage output
- Retrieval of min. and max. values
- Integral power supply for active sensors
- DC power supply
- Complete electrical isolation
- LED alarm status indication
- DIN-standard 1/8 front panel with IP 65 protection
- Decimal point can be adjusted to any position
- Configurable via front-panel keypad

Typical application of PMX400

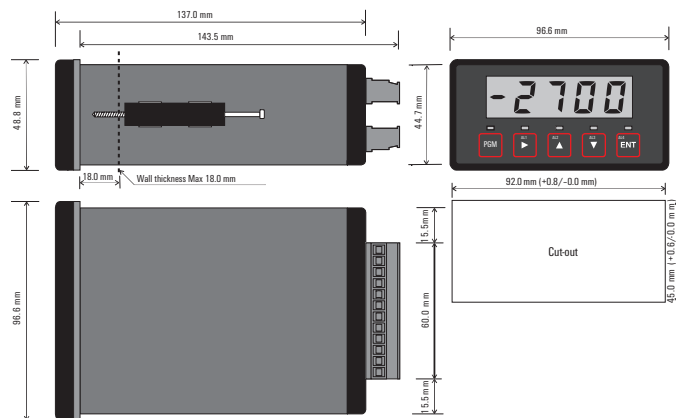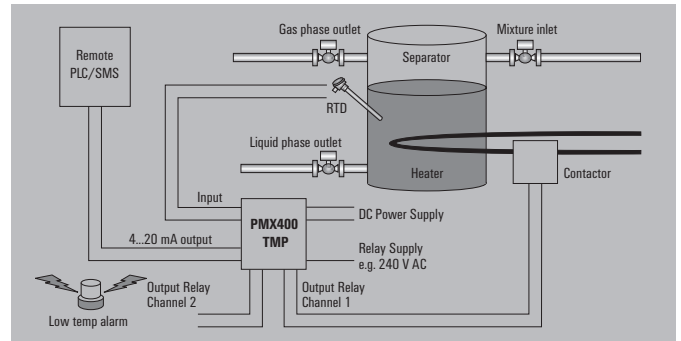

Common technical data

| Display | |
|---|-------------------------------------|
| Type | Four-digit, red LED, 14.2 mm |
| Display value | Percent or real-value displayed |
| Display range | -9999 to +9999 |
| Status indicator | Alarm channel 1-4; Status LED |
| Output | |
| Type | Current or voltage output |
| Scaling | Variable |
| Output signal limits | 0...20 mA or 0...11 V |
| Load resistance | ≤ 850 Ω (current), ≥ 1 MΩ (voltage) |
| Residual ripple | < 20 mV _{ss} |
| Transmit function | direct or reverse |
| General information | |
| Accuracy | Typically ± 0.1 % of signal range |
| Linearity | ≥ 0.05 % |
| Repeat accuracy | ± 0.02 % of signal range |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | ≤ 0.02 % / °C |
| Long-term drift | 0.1 % / 10,000 h |
| Cut-off frequency (-3 dB) | 5 Hz |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Isolation voltage | 1 kV input / output / power supply |
| Data backup | ≥ 100 years (without power supply) |
| Ambient temperature (operational)/storage temperature | 0 °C...60 °C / -25 °C...75 °C |
| EMC standard | DIN EN 61326 |
| Approvals | CE, cULus |

| | |
|----|-----------------------------|
| 4 | Optional, depending on type |
| 5 | Optional, depending on type |
| 6 | Optional, depending on type |
| 7 | Optional, depending on type |
| 8 | Optional, depending on type |
| 9 | Optional, depending on type |
| 10 | Optional, depending on type |
| 11 | Optional, depending on type |
| 12 | Optional, depending on type |
| 13 | Optional, depending on type |
| 14 | Optional, depending on type |
| 15 | Optional, depending on type |
| 16 | Optional, depending on type |
| 17 | Optional, depending on type |
| 18 | Optional, depending on type |
| 19 | Optional, depending on type |
| 20 | Optional, depending on type |
| 21 | Optional, depending on type |
| 22 | Optional, depending on type |
| 23 | Optional, depending on type |
| 24 | Optional, depending on type |

Connections


| Terminal | Signal | |
|----------|------------------|---|
| 1 | - | Supply voltage |
| 2 | + | |
| 3 | Signal + | Analogue output |
| 4 | Signal - current | (only for AO version) |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | NO contacts | Alarm channel 1 (only for 4RO version) |
| 14 | Common | |
| 15 | NC contact | |
| 16 | NO contacts | Alarm channel 2 (only for 4RO version) |
| 17 | Common | |
| 18 | NC contact | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |

Process value displays with LED display

PMX400 Series

- Temperature measuring and monitoring (PT100, thermocouple, mV)
- Automatic sensor detection
- Automatic compensation for PT100 measurement leads
- Cold-junction compensation for thermocouple inputs
- Display instrument for control panel installation


PMX400TMP

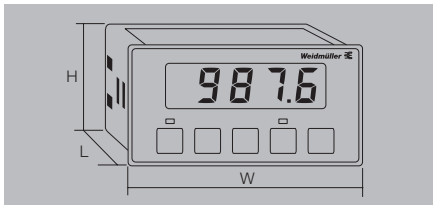

Technical data

| Display | |
|----------------------------|-------------------------------------|
| Display value | Percentage or real value display |
| Input | |
| Type | Thermocouple, PT100 RTD or mV |
| Input signal | Configurable for 10 ranges |
| cold junction compensation | automatic |
| Cable-length compensation | automatic |
| General data | |
| Supply voltage | 20...28 V DC |
| Power consumption | 6 W @ 24 V DC |
| Step response time | 300 ms (10...90 %) |
| Sampling rate | 5x pro s |
| Attenuation factor | 0...99, programmable digital filter |
| Type | 4-digit, red LED, 14.2 mm |
| Insulation voltage | Voltage input/ current input |
| EMC standards | 1 kV input / output / power supply |
| Approvals | DIN EN 61326 CE; cULus; EAC |

| Display | |
|----------------------------|-------------------------------------|
| Display value | Percentage or real value display |
| Input | |
| Type | Thermocouple, PT100 RTD or mV |
| Input signal | Configurable for 10 ranges |
| cold junction compensation | automatic |
| Cable-length compensation | automatic |
| General data | |
| Supply voltage | 20...28 V DC |
| Power consumption | 6 W @ 24 V DC |
| Step response time | 300 ms (10...90 %) |
| Sampling rate | 5x pro s |
| Attenuation factor | 0...99, programmable digital filter |
| Type | 4-digit, red LED, 14.2 mm |
| Insulation voltage | Voltage input/ current input |
| EMC standards | 1 kV input / output / power supply |
| Approvals | DIN EN 61326 CE; cULus; EAC |

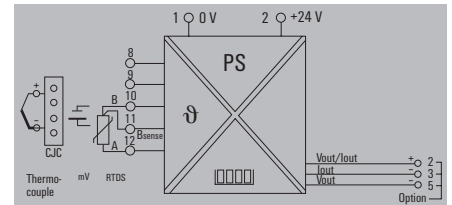

Connections

| Terminal | Signal | |
|----------|--------------------------------|---------------------|
| 1 | - | Supply voltage |
| 2 | + | |
| 6 | Connections for changing setup | Configuration |
| 7 | | |
| 8 | Cold-junction compensation | Thermocouple inputs |
| 9 | | |
| 10 | | |
| 11 | Not used | |
| 12 | Not used | |
| 8 | Not used | RTD inputs |
| 9 | | |
| 10 | | |
| 11 | B | |
| 12 | B-Sense | |
| 8 | Not used | mV inputs |
| 9 | | |
| 10 | | |
| 11 | mV Signal - | |
| 12 | mV Signal + | |
| 12 | Not used | |

Thermocouple (type J, K, N, T, E, B, S, R), RTD or mV signals

| Input Type | Max. display range | |
|------------|--------------------|-------------------|
| | highest | lowest |
| J | 870 °C (1598 °F) | -50 °C (-58 °F) |
| K | 1372 °C (2502 °F) | |
| N | 1300 °C (2372 °F) | |
| T | 400 °C (752 °F) | |
| E | 700 °C (1292 °F) | |
| B | 1800 °C (3272 °F) | 0 °C (32 °F) |
| S | 1768 °C (3214 °F) | -50 °C (-58 °F) |
| R | 1768 °C (3214 °F) | -50 °C (-58 °F) |
| RTD | 820 °C (1508 °F) | -220 °C (-364 °F) |
| mV | 200 mV | -200 mV |

| Dimensions | |
|--|--|
| Clamping range (nominal / min. / max.) | |
| Length x width x height | |
| Note | |

| Screw connection | |
|-------------------|--|
| 1.5 / 0.5 / 2.5 | |
| 137 / 96.6 / 48.8 | |
| Note | |

Ordering data

| |
|---------------------------------|
| without analogue / alarm output |
|---------------------------------|

| Type | Qty. | Order No. |
|-----------|------|------------|
| PMX400TMP | 1 | 7940017862 |

| Note | |
|------|--|
|------|--|


Accessories

| Note | |
|------|--|
|------|--|

PMX400 Series

- Frequency measuring and monitoring (3-wire NPN/PNP, NPN/PNP Open Collector, TTL logic, solid-state switch, potential-free contacts)
- Integrated power supply for external sensors
- Two outputs for monitoring limit-values
- De-bouncing of switched input pulses


PMX400HZX

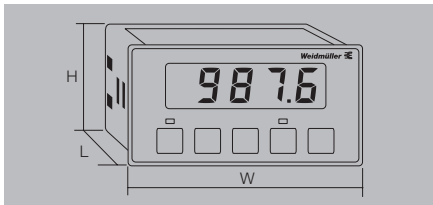

Technical data

| | |
|----------------------------|---|
| Display | Display value |
| Input | Type Input signal Sensor supply Input voltage |
| Alarm (channel 1/2) | Type Rated switching current Rated switching voltage |
| Alarm (channel 3/4) | Type Switching current |
| General data | Supply voltage Power consumption Step response time Attenuation factor Type Insulation voltage EMC standards Approvals |

| |
|---|
| Percentage or real value display |
| Adjustable frequencies Configurable for 4 ranges 12 V DC to 25 mA |
| Channel 1/2: transistor output channel 3/4: relay contact (CO) |
| 200 mA 50 V DC |
| Channel 1/2: transistor output channel 3/4: relay contact (CO) |
| Channel 3/4: 3 A @ 240 V AC / 24 V DC (resistive load) |
| 24 V DC ± 10 % 6 W @ 24 V DC < 220 ms (10...90 %) |
| 0...99, programmable digital filter RO/AO version with 1 analogue output and 2 alarm outputs |
| 1 kV input / output / power supply DIN EN 61326 CE; cULus; EAC |

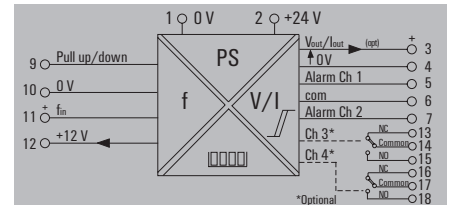

Connections

| Terminal | Signal | |
|----------|---------------------|---|
| 1 | - | Supply voltage |
| 2 | + | |
| 3 | Signal + | Analogue output (only for AO version) |
| 4 | Signal - | |
| 5 | Common | Alarm channel 1 and 2 (only for 4RO version) |
| 6 | Channel 1 | |
| 7 | Channel 2 | |
| 8 | Configuration | Inputs/Configuration (Set-up: 12/8 connection) |
| 9 | Pull up / pull down | |
| 10 | Signal - | |
| 11 | Signal + | |
| 12 | 12 V DC | |
| 13 | Common | Alarm channel 3 (only for 4RO version) |
| 14 | NC contact | |
| 15 | NO contacts | |
| 16 | Common | Alarm channel 4 (only for 4RO version) |
| 17 | NC contact | |
| 18 | NO contacts | |

| Input range | Offset | Resolution |
|--------------|--------------|------------|
| 0...9.999 Hz | 0...9.998 Hz | 0.001 Hz |
| 0...99.99 Hz | 0...99.98 Hz | 0.01 Hz |
| 0...999.9 Hz | 0...999.8 Hz | 0.1 Hz |
| 0...9999 Hz | 0...9998 Hz | 1 Hz |

| | |
|-------------------|---|
| Dimensions | Clamping range (nominal / min. / max.) Length x width x height |
| Note | |

| | |
|-------------------------|--------------------------------------|
| Screw connection | 1.5 / 0.5 / 2.5 137 / 96.6 / 48.8 |
| Note | |

Ordering data

| | | | |
|---------------------------------|-----------------|-------------|------------------|
| with analogue/alarm output | Type | Qty. | Order No. |
| without analogue / alarm output | PMX400HZX RO/AO | 1 | 7940011979 |
| | PMX400HZX | 1 | 7940015595 |

| | |
|-------------|--|
| Note | |
|-------------|--|

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

Universal auto-manual stations AMS400A

Universal auto-manual stations

The AMS400A modules are interface devices which are used between controllers / PLCs and valves / actuators in the field. They implement auto-manual transfer operations for automatically controlled processes.

Typical applications are:



- Manual start-up of sensitive processes before handover to automatic control
- Manual over-ride in case of controller failure or malfunction.

The AMS400A offers three different I/O configurations, which serve as interfaces between:

- Analogue control equipment and analogue control devices
- Digital control equipment and analogue control devices
- Digital control equipment and digital control devices

In AA (analogue-analogue) mode, it is possible for a remote source to switch between manual and automatic operations using digital inputs. Ramp rates and additional handover. Two options are available for the method of returning to automatic control, in order to ensure a bumpless transfer.


Typical application of AMS400A

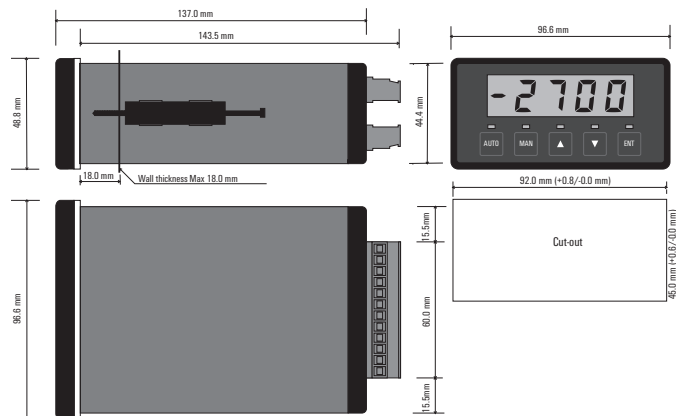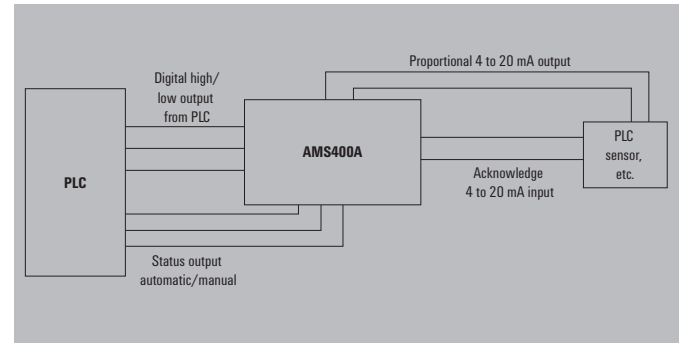

AMS400A

Universal interface device

- Display instrument for control panel installation
- 1/8 DIN standard front
- IP 65 fully insulated
- Pluggable connection terminals

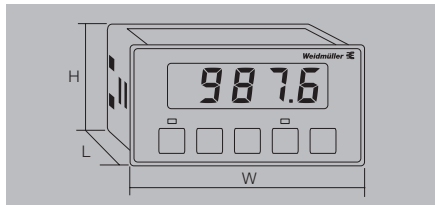

Technical data

| Display | |
|---|---|
| Type | 4-digit, red LED, 14.2 mm |
| Display value | Percentage or real value display |
| Display range | -9999...9999 |
| Input | |
| Type | Current input or digital input (pulse-controlled or no-voltage contact) |
| Input signal | 0...24 mA / 0...12 V DC |
| Input resistance | 50 Ω (mA) / 10 MΩ (V) |
| Sampling rate | 5x per sec. (current input) |
| Pulse width, min. | 64 ms (digital input) |
| Output | |
| Type | Analogue and digital output |
| Output analogue | Current or voltage, configured with jumper |
| Output current | 0...24 mA |
| Output voltage | 0...18 V |
| Last resistor, max. | 900 Ω @ 20 mA |
| Alarm (RO version only) | |
| Type | Status relay |
| Number of channels | 2 |
| Type of contact | CO contact |
| Ratings | 3 A @ 240 V AC or 5 A @ 24 V DC |
| General data | |
| Supply voltage | 24 V DC ± 10 %, other voltages on request |
| Power consumption | 6 W @ 24 V DC |
| Accuracy | Typically ± 0.1 % of signal range |
| Repeat accuracy | ± 0.02 % of signal range |
| Temperature coefficient | ≤ 0.02 % / °C |
| Cut-off frequency (-3 dB) | 5 Hz |
| Step response time | 300 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 1 kV input / output / power supply |
| Ambient temperature / Storage temperature | / 0 °C...60 °C / -25 °C...70 °C |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; EAC |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

Ordering data

| |
|-----------------|
| Analogue output |
|-----------------|

Note

Accessories

| |
|------|
| Note |
|------|

AMS400A

Universal interface device




| Display | |
|---|---|
| Type | 4-digit, red LED, 14.2 mm |
| Display value | Percentage or real value display |
| Display range | -9999...9999 |
| Input | |
| Type | Current input or digital input (pulse-controlled or no-voltage contact) |
| Input signal | 0...24 mA / 0...12 V DC |
| Input resistance | 50 Ω (mA) / 10 MΩ (V) |
| Sampling rate | 5x per sec. (current input) |
| Pulse width, min. | 64 ms (digital input) |
| Output | |
| Type | Analogue and digital output |
| Output analogue | Current or voltage, configured with jumper |
| Output current | 0...24 mA |
| Output voltage | 0...18 V |
| Last resistor, max. | 900 Ω @ 20 mA |
| Alarm (RO version only) | |
| Type | Status relay |
| Number of channels | 2 |
| Type of contact | CO contact |
| Ratings | 3 A @ 240 V AC or 5 A @ 24 V DC |
| General data | |
| Supply voltage | 24 V DC ± 10 %, other voltages on request |
| Power consumption | 6 W @ 24 V DC |
| Accuracy | Typically ± 0.1 % of signal range |
| Repeat accuracy | ± 0.02 % of signal range |
| Temperature coefficient | ≤ 0.02 % / °C |
| Cut-off frequency (-3 dB) | 5 Hz |
| Step response time | 300 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 1 kV input / output / power supply |
| Ambient temperature / Storage temperature | / 0 °C...60 °C / -25 °C...70 °C |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; EAC |
| Dimensions | |
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

| Type | Qty. | Order No. |
|-------------------|------|------------|
| AMS400A 4-20mA/AO | 1 | 7940011895 |

Note

Accessories

| |
|------|
| Note |
|------|

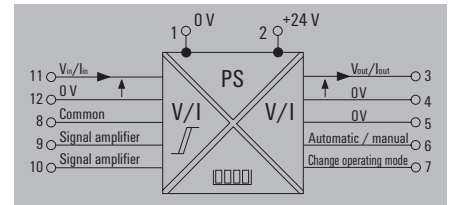

Connections

| Terminal | Signal | |
|----------|-----------------------|-----------------|
| 1 | - | Supply voltage |
| 2 | + | |
| 3 | Signal + | Analogue Output |
| 4 | Signal - | |
| 5 | Signal - 0 V | Status outputs |
| 6 | Automatic / manual | |
| 7 | Change operating mode | Digital inputs |
| 8 | Common | |
| 9 | Signal amplifier | Analogue inputs |
| 10 | Signal reduction | |
| 11 | Signal + | |
| 12 | Signal - | |

Indicators with scalable displays

DI350

3½-digit LED display, auxiliary powered

The DI350 is a pair of inexpensive 3½-digit displays - one for analogue current (4-20 mA) and the other for voltage (0-10 V) signals, for use in industrial applications.

An integrated regulated power supply can be used to supply two-wire transmitters.


The decimal point can be moved to any of the positions (1.XXX, 1X.XX, 1XX.X or 1XXX) so that it can display values in any range.

The bright seven-segment LEDs are easily visible even in weak lighting. The special filtering properties of the front face give it a wide viewing angle.


The DIN-standard 1/8 front panel with IP 65 protection ensures reliable operation in wet areas. The connection uses pluggable screw-connection elements.

The DI350 models are hazardous area approved cuLus Ex (Class 1 Div. 2, Groups A, B, C & D)

Typical application of DI350

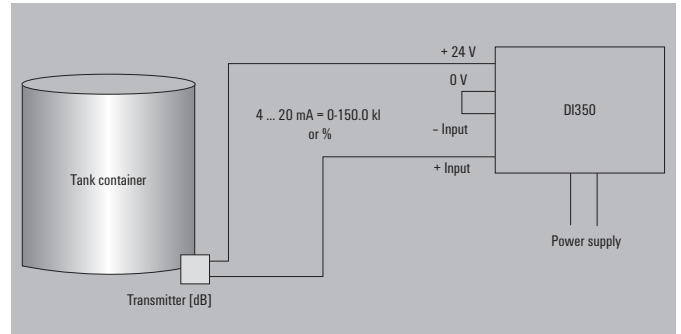


Wiring diagramm DI350

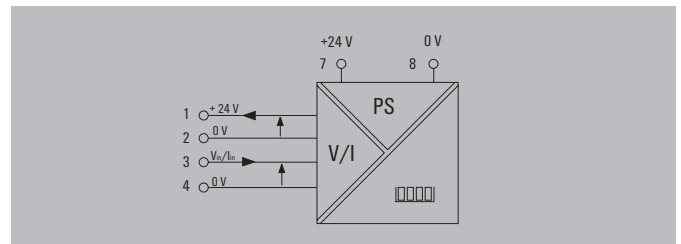


Connections

| Terminal | Signal | |
|----------|--------------------------------|----------------|
| 1 | 24 V DC power supply sensor | Inputs |
| 2 | 0 V DC power supply sensor | |
| 3 | Input signal + | |
| 4 | Input signal - | |
| 5 | | |
| 6 | Not used | |
| 7 | L - | Supply voltage |
| 8 | L + | |

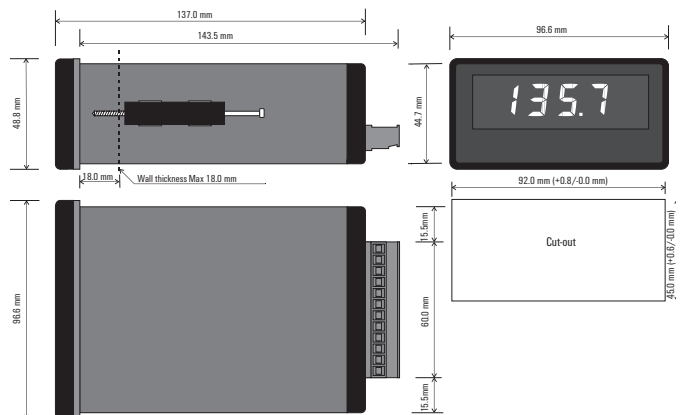

DI350

- Display instrument for control panel installation
- 1/8 DIN standard front
- 3½ digits
- IP 65 fully insulated
- Pluggable connection terminals

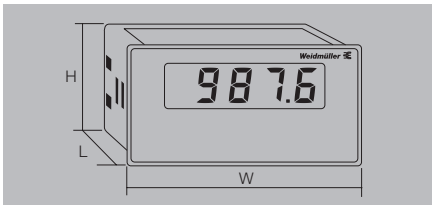

Technical data

| Input | |
|---|---|
| Input signal | 0...10 V |
| Input resistance | 1 MΩ |
| Supply voltage | 24 V DC (up to 25 mA) |
| Display | |
| Type | 3.5 digits, red LED, 14.2 mm |
| Display range | -1999...1999 |
| Display value | Percentage or real value display |
| Format | 1-line / decimal point: 1.000, 100.0, 10.00 |
| Settings | |
| Offset | ± 1200 digital steps |
| Range of adjustment | 20 - 2100 digital steps |
| General data | |
| Supply voltage | 24 V DC (12...35 V DC) |
| Power consumption | 6 W @ 24 V DC |
| Linearity | < 0.1 % typ. |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | ≤ 0.02 % / °C |
| Long-term drift | 0.1 % / 10.000 h |
| Step response time | 200 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 1 kV input / power supply |
| Ambient temperature / Storage temperature | / 0 °C...60 °C / -25 °C...70 °C |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; cULusEX; EAC |

| Dimensions | |
|--|-------------------|
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

Ordering data

| | | | |
|-----------------------------|---------------------|-------------|-------------------|
| Voltage input/Current input | Type | Qty. | Order No. |
| | DI350 0-10V/0-100.0 | 1 | 7940011570 |

| Note | |
|------|--|
|------|--|

Accessories

| Note | |
|------|--|
|------|--|

DI350

Display with voltage input



- Integrated power supply for external sensors
- Linearity with an accuracy of 0.1 % of the measuring range
- Complete galvanic isolation

| Input | |
|---|---|
| Input signal | 0...10 V |
| Input resistance | 1 MΩ |
| Supply voltage | 24 V DC (up to 25 mA) |
| Display | |
| Type | 3.5 digits, red LED, 14.2 mm |
| Display range | -1999...1999 |
| Display value | Percentage or real value display |
| Format | 1-line / decimal point: 1.000, 100.0, 10.00 |
| Settings | |
| Offset | ± 1200 digital steps |
| Range of adjustment | 20 - 2100 digital steps |
| General data | |
| Supply voltage | 24 V DC (12...35 V DC) |
| Power consumption | 6 W @ 24 V DC |
| Linearity | < 0.1 % typ. |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | ≤ 0.02 % / °C |
| Long-term drift | 0.1 % / 10.000 h |
| Step response time | 200 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 1 kV input / power supply |
| Ambient temperature / Storage temperature | / 0 °C...60 °C / -25 °C...70 °C |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; cULusEX; EAC |

| Screw connection | |
|--|-------------------|
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

| | | | |
|-----------------------------|---------------------|-------------|-------------------|
| Voltage input/Current input | Type | Qty. | Order No. |
| | DI350 0-10V/0-100.0 | 1 | 7940011570 |

| Note | |
|------|--|
|------|--|

| Note | |
|------|--|
|------|--|

DI350

Display with current input



- Integrated power supply for external sensors
- Linearity with an accuracy of 0.1 % of the measuring range
- Complete galvanic isolation

| Input | |
|---|---|
| Input signal | 4...20 mA |
| Input resistance | 22 Ω |
| Supply voltage | 24 V DC (up to 25 mA) |
| Display | |
| Type | 3.5 digits, red LED, 14.2 mm |
| Display range | -1999...1999 |
| Display value | Percentage or real value display |
| Format | 1-line / decimal point: 1.000, 100.0, 10.00 |
| Settings | |
| Offset | ± 1200 digital steps |
| Range of adjustment | 20 - 2100 digital steps |
| General data | |
| Supply voltage | 24 V DC (12...35 V DC) |
| Power consumption | 6 W @ 24 V DC |
| Linearity | < 0.1 % typ. |
| Humidity | 0...90 % (no condensation) |
| Temperature coefficient | ≤ 0.02 % / °C |
| Long-term drift | 0.1 % / 10.000 h |
| Step response time | 200 ms (10...90 %) |
| Impulse withstand voltage | 4 kV (1.2/50 μs) |
| Insulation voltage | 1 kV input / power supply |
| Ambient temperature / Storage temperature | / 0 °C...60 °C / -25 °C...70 °C |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; cULusEX; EAC |

| Screw connection | |
|--|-------------------|
| Clamping range (nominal / min. / max.) | 1.5 / 0.5 / 2.5 |
| Length x width x height | 137 / 96.6 / 48.8 |
| Note | |

| | | | |
|-----------------------------|----------------------|-------------|-------------------|
| Voltage input/Current input | Type | Qty. | Order No. |
| | DI350 4-20mA/0-100.0 | 1 | 7940010185 |

| Note | |
|------|--|
|------|--|

| Note | |
|------|--|
|------|--|

Indicators and configurable displays

LPD350

3½-digit digital display, loop powered

The LPD350 is a compact, cost effective, 3½ digit digital indicator designed specifically for current loop signals. The decimal point can be moved to any position (1.XXX, 1X.XX, 1XX.X or 1XXX) so that it can display values in a range of ± 1999 .

The LPD350 uses a liquid crystal display which can be read even under poor lighting conditions.



No additional wiring is needed for a power supply. The user can simply break the loop and connect to the LPD350.

The housing has a DIN-standard 1/8 front panel with IP 65 protection. The connection uses pluggable screw-connection elements.

Technical features:


- Large 3½-digit digital LCD display
- 4...20 mA input
- Loop-powered two-wire design (125 Ω loop load)
- Direct or reverse-action display
- Linearity is $\pm 0.1\%$ of the corresponding signal range
- DIN-standard front-panel with IP 65 protection
- Pluggable screw-connection mechanism
- Hazardous area approved cuLus Ex (Class 1 Div. 2, Groups A, B, C & D)

Typical application of LPD350

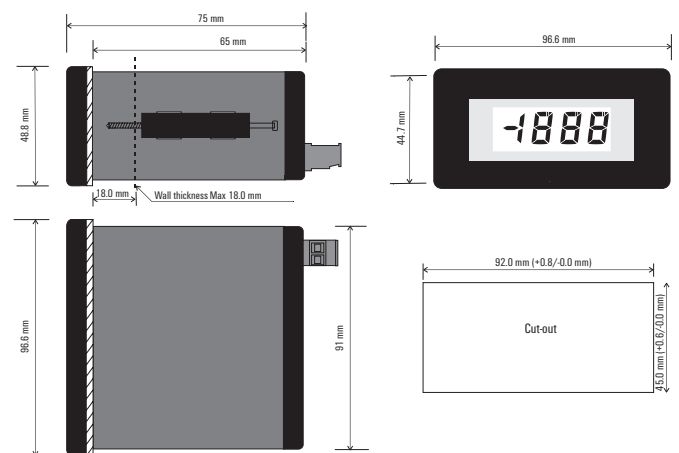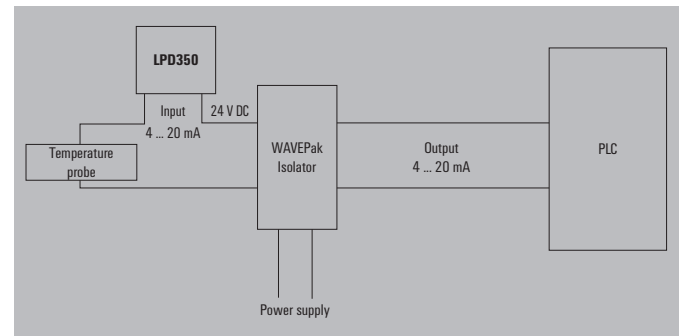

LPD350

- Display instrument for control panel installation
- 1/8 DIN standard front
- 3½ digits
- IP 65 fully insulated
- Pluggable connection terminals

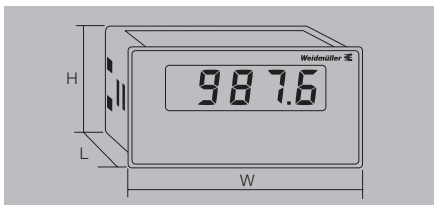


Technical data

| |
|--|
| Input |
| Input current |
| Voltage drop |
| Input resistance |
| Input current, max. |
| Input current, max. when wired incorrectly |
| Display |
| Type |
| Display range |
| Format |
| Settings |
| Offset |
| Range of adjustment |
| General data |
| Accuracy |
| Repeat accuracy |
| Temperature coefficient |
| Step response time |
| Sampling rate |
| Ambient temperature / Storage temperature |
| EMC standards |
| Approvals |

LPD350

Current input

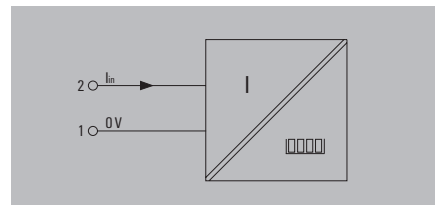

| |
|--|
| 4...20 mA |
| 2.5 V @ 20 mA |
| 125 Ω |
| 100 mA constant / 500 mA for 10 s |
| 500 mA constant |
| 3.5 digits, black LCD with clear background, 12.7 mm |
| -1999...1999 |
| Single-line |
| ± 1999 digital steps in two switching ranges |
| 0...3998 in three switching ranges |
| ± 0.05 % from signal range ± 1 digital step |
| ± 0.05 % of signal range |
| Offset ± 0.1 digital steps per °C |
| adjustment range ± 0.1 digital steps per °C |
| 200 ms (10...90 %) |
| 2,5 x pro s |
| -20 °C...70 °C / -25 °C...85 °C |
| DIN EN 61326 |
| CE; cULus; cULusEX; EAC |

Connections

| Terminal | Signal |
|----------|---------|
| 1 | Input - |
| 2 | Input + |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Length x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 1.5 / 0.5 / 2.5 |
| 75 / 96.6 / 48.8 |

Ordering data

| |
|---------------|
| Current input |
|---------------|

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| LPD350 4-20mA/0-100.0 | 1 | 7940010163 |

| |
|-------------|
| Note |
|-------------|

Accessories

| |
|-------------|
| Note |
|-------------|

Configurable IP 67 field-mounted LCD indicator LPD405F

4½-digit display, loop powered

The display is loop powered by the 4...20 mA current loop with no external supply required. The twenty-mm LCD displays can be read even under poor light conditions.

A sheet of perforated self-adhesive labels is included. They include standard engineering units and can be used for all label needs.



The electronic subassembly is housed in a rugged, glass reinforced polycarbonate, IP 67 case. This housing is suitable for any industrial environment.

Optionally available is a pipe mounting bracket which can be used for horizontal and vertical mounting.

Technical features:


- Big 20 mm LCD display
- 4...20 mA inputs (two-wire loop-powered)
- Integrated signal linearisation ($\sqrt{\quad}$, $x^{3/2}$, $x^{5/2}$ or user-defined)
- Min./max. value display feature
- IP 67 protection
- Pipe mount bracket option
- Hazardous area approved cULus Ex (Class 1 Div. 2, Groups A, B, C & D)

Typical application of LPD405F

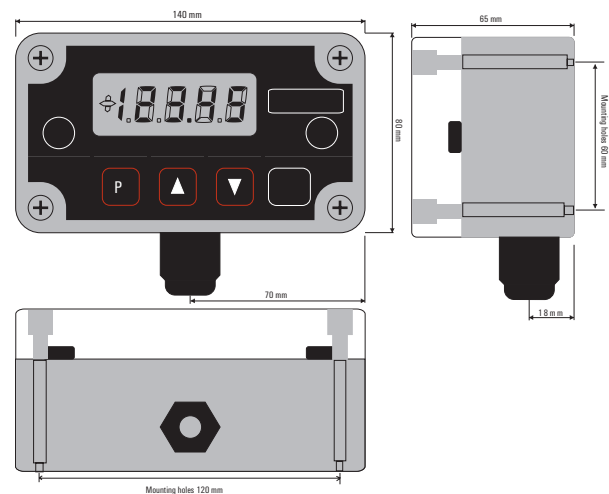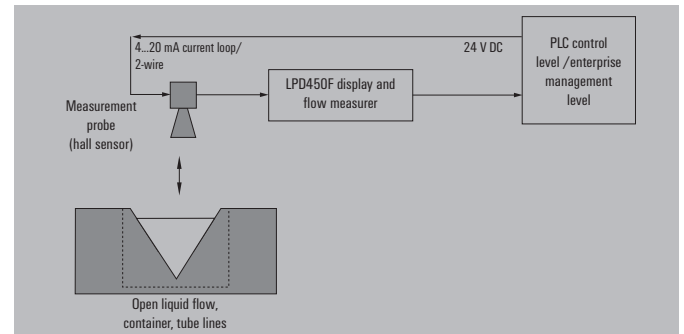

LPD450F

- Display instrument for outdoor use
- 4½ Digits
- IP 67 fully insulated
- Optionally available with fixing clips for pipe mounting

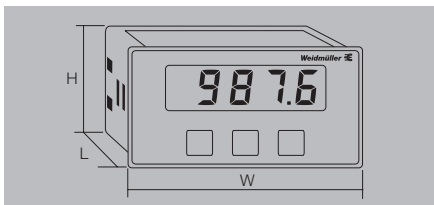

Technical data


| |
|---|
| Input |
| Input current |
| Transmit function |
| Display |
| Type |
| Display value |
| Display range |
| Decimal point |
| General data |
| Supply voltage |
| Voltage drop |
| Accuracy |
| Repeat accuracy |
| Temperature coefficient |
| Humidity |
| Step response time |
| Sampling rate |
| Change of display |
| Ambient temperature / Storage temperature |
| EMC standards |
| Approvals |

LPD450F


Current input



| |
|---|
| 4...20 mA |
| $\sqrt{\cdot}$, $x^{3/2}$, $x^{5/2}$ or programmable (2-21 steps) |
| 4.5-character, black LCD with clear background, 20 mm |
| Percentage or real value display |
| ± 19.999 (0.00...100.00 factory setting) |
| 18888, 1.8888, 18.888, 188.88, 1888.8 |
| Loop powered, via 4...20 mA input |
| < 4.3 V |
| $\pm 0.05\%$ from signal range ± 1 digital step |
| $\pm 0.01\%$ of signal range |
| Offset $\pm 0.01\%$ / °C |
| adjustment range ± 0.1 digital steps or 0.01 % / °C |
| 10...90 % (no condensation) |
| Programmable in 99 steps from 1...30 sec. |
| 16 x pro s |
| 2 x per sec. |
| / 0 °C...60 °C / -25 °C...70 °C |
| DIN EN 61326 |
| CE; cULus; cULusEX; EAC |

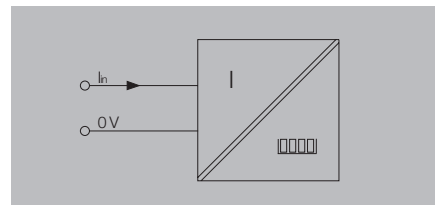

Mounting sketch

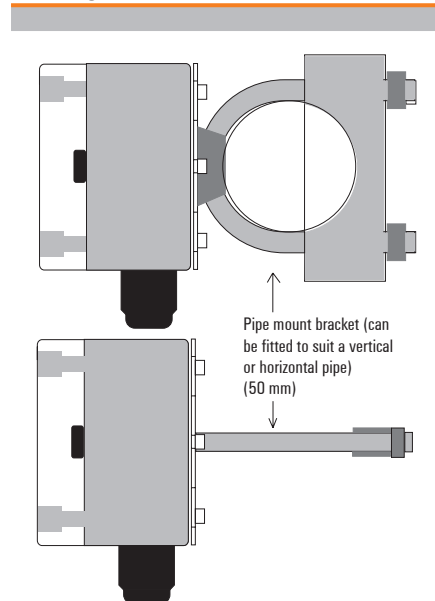

F

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Length x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 1.5 / 0.5 / 2.5 |
| 65 / 140 / 80 |

Ordering data

| |
|---------------|
| Current input |
|---------------|

| Type | Qty. | Order No. |
|----------------|------|------------|
| LPD450F 4-20mA | 1 | 7940010236 |

| |
|-------------|
| Note |
|-------------|

Accessories

| |
|-------------|
| Note |
|-------------|

| |
|--|
| Fixing clip Pipe Mount Kit - 7940010667 |
|--|

Accessories Analogue Signal Conditioning


| | | |
|---|---|------|
| Accessories Analogue Signal Conditioning | Accessories Analogue Signal Conditioning – Overview | G.2 |
| | USB configuration adapter | G.4 |
| | CH20M DIN rail bus | G.6 |
| | ACT20 power-feed modules for rail bus | G.8 |
| | ACT20X/ACT20C/ACT20P – Accessories | G.10 |
| | MICROSERIES/ACT20M – Accessories | G.11 |
| | MCZ/WAVE – Accessories | G.12 |
| | Calibrators | G.14 |

Accessories Analogue Signal Conditioning

Configure, calibrate, mount, mark, (cross-) connect.

A comprehensive line of accessories is available for the analogue signal converter product family. The line includes configuration adapters for software-programmable products, interface modules, calibrators and mounting accessories (such as cross-connectors, end plates and terminal connectors) – all naturally in the top Weidmüller quality that you've come to expect.





USB configuration interface



CH20M DIN rail bus



Power supply modules for rail bus



ACT20X/ACT20P – Accessories



**MICROSERIES ACT20M
Accessories**



MCZ/Wave Accessories



Calibrators

CBX200

CBX200 USB



Technical data

| Input | |
|-------------------------|-------------------------------------|
| Type | USB 2.0 (USB type A plug) |
| Input current | ≤ 100 mA |
| Input resistance | 22 kΩ |
| Input voltage | 1.6 ... 5.6 V |
| Output | |
| Type | RS232 (4-pole 2.5-mm jack plug) |
| Output voltage | 3.3 V regulated |
| Output current | 3 A |
| Level on interfaces | 1.8...5.6 V (automatically adapted) |
| Baud rate | ≤ 115 kBd |
| Activation signal | 9...15 V typ. 12 V / 4 mA |
| Insulation coordination | |
| Insulation voltage | 2.5 kV (input / output) |

| Type | USB 2.0 (USB type A plug) |
|-------------------------|-------------------------------------|
| Input current | ≤ 100 mA |
| Input resistance | 22 kΩ |
| Input voltage | 1.6 ... 5.6 V |
| Output | |
| Type | RS232 (4-pole 2.5-mm jack plug) |
| Output voltage | 3.3 V regulated |
| Output current | 3 A |
| Level on interfaces | 1.8...5.6 V (automatically adapted) |
| Baud rate | ≤ 115 kBd |
| Activation signal | 9...15 V typ. 12 V / 4 mA |
| Insulation coordination | |
| Insulation voltage | 2.5 kV (input / output) |

The CBX200 USB is a USB2.0/RS232-interface converter with galvanic isolation. It has additional functionality for controlling and supplying the connected RS232 device. The CBX200 USB makes it possible to configure the intrinsically safe ACT20X product line and the WAVE TTA signal converter.
The CBX200 USB is not compatible with the CBX100 USB.

Table for selecting a configuration adapter

| Product | CBX100 | CBX200 |
|----------|--------|--------|
| ACT20X | | X |
| WAVE TTA | X | X |
| ITX+ | X | |

Pin assignments for jack plug



| DTR* | Vcc |
|------|-------|
| 0 | 3,3 V |
| 1 | 0 V |

| Control input | RTS* | RS232 interface |
|---------------|------|-----------------|
| 12 V | 1 | active |
| 12 V | 0 | active |
| 0 V | 1 | active |
| 0 V | 0 | not active |

* RTS and DTR are internal control signals

Installation notes

The power supply to the device comes from the USB port via a USB type-A plug. The output-side of the RS232 interface uses a four-pole 2.5-mm jack plug to connect. This jack plug is also capable of activating the RS232 interface when needed with a 12-V control voltage. With the assistance of the DTM, the USB interface is diverted to a COM interface. The RS232 interface can be activated with an RTS signal (RTS = 1 → output activated) via the diverted COM interface. The jack plug is also capable of supplying the RS232 node with a regulated voltage of 3.3 V at 4 mA current. The DTR signal (DTR = 0 → supply activated) is used for control. It is also possible to query the status using the DSR signal (DSR = 0 → output activated).

The "WI-Manager" software, the "TTA Set" and the DTM library can all be downloaded free of charge from www.weidmueller.com.

| | |
|------|--|
| Note | |
|------|--|

Ordering data

| Type | Qty. | Order No. |
|------------|------|------------|
| CBX200 USB | 1 | 8978580000 |

| | |
|------|--|
| Note | |
|------|--|


Accessories

| | |
|------|--|
| Note | |
|------|--|

CH20M DIN rail bus

Quick and safe power supply through the mounting rail.

This customer-friendly infrastructure solution brings power, signals and data to the rail in a quick and reliable manner. The DIN rail bus can replace the tedious individual wiring process with a flexible and uninterrupted system solution. As a result, the wiring overhead and the error rate are both reduced. The uninterrupted system bus is securely integrated within the 35 mm standard mounting rail. Whether 7.5 mm or 15 mm high, the custom-fit rail profiles are easy to install on all TS 35 standard rails in accordance with DIN EN 60715.

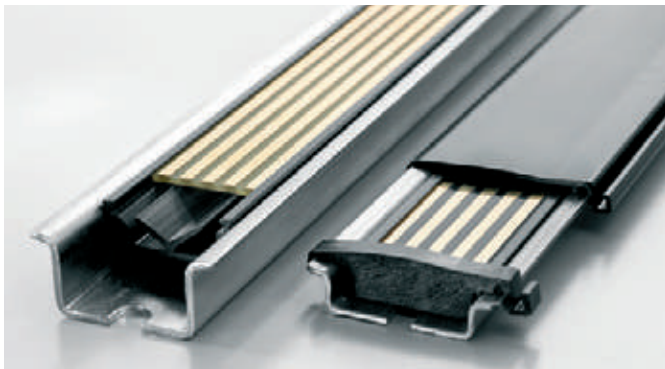

The resistant gold-plated contacts ensure a permanent and reliable contact. The ACT20M modules are simply snapped onto the mounting rail and are automatically in contact with the DIN rail bus.

The supply to the 24 V power supply can be from either one of the modules (up to 400 mA) or a separate power supply terminal (up to 4 A). This is sufficient for up to 120 modules. The ACT20-Feed-In-Basic provides a simple and compact (6 mm width) power supply terminal solution. The ACT20-Feed-In-Pro is a more powerful 22.5 mm wide solution. This makes a backup power supply that includes error messaging possible.



Rail bus accessories

CH20M BUS-PROFIL TS35x7.5/1000

Support section for bus circuit board



- Support section for TS 35 x 7.5
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x7.5/250 | 10 | 1248150000 |
| CH20M BUS-PROFIL TS35x7.5/500 | 10 | 1248160000 |
| CH20M BUS-PROFIL TS35x7.5/750 | 5 | 1248170000 |

CH20M BUS-PROFIL TS35x15/1000

Support section for bus circuit board



- Support section for TS 35 x 15
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| CH20M BUS-PROFIL TS35x15/250 | 5 | 1248180000 |
| CH20M BUS-PROFIL TS35x15/500 | 5 | 1248190000 |
| CH20M BUS-PROFIL TS35x15/750 | 5 | 1248210000 |

CH20M BUS 4.50/05 AU/1000

Bus PCB



- Bus circuit board for use on TS 35 x 7.5 and TS 35 x 15
- Length: 250, 500 or 750 mm
- Five conductor paths, gold-plated
- Electrical rating: 63 V AC, 5 A/conductor path

Ordering data

| Type | Qty. | Order No. |
|--------------------------|------|------------|
| CH20M BUS 4.50/05 AU/250 | 10 | 1248220000 |
| CH20M BUS 4.50/05 AU/500 | 10 | 1248230000 |
| CH20M BUS 4.50/05 AU/750 | 5 | 1248240000 |

CH20M BUS-ADP TS35/1000

Cover plate



- Cover plate for DIN rail bus
- Length: 250, 500 or 750 mm

Ordering data

| Type | Qty. | Order No. |
|------------------------|------|------------|
| CH20M BUS-ADP TS35/250 | 10 | 1248250000 |
| CH20M BUS-ADP TS35/500 | 10 | 1248260000 |
| CH20M BUS-ADP TS35/750 | 5 | 1248270000 |

CH20M BUS-AP LI TS35x7.5 & 15

End plate



- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- left

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP LI TS35x7.5 & 15 | 50 | 1193160000 |

CH20M BUS-AP RE TS35x7.5 & 15

End plate




- End plate for DIN rail bus
- Fits on TS 35 x 7.5 and TS 35 x 15
- right

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| CH20M BUS-AP RE TS35x7.5 & 15 | 50 | 1193170000 |

SET CH20M BUS 250MM TS 35X15

Set

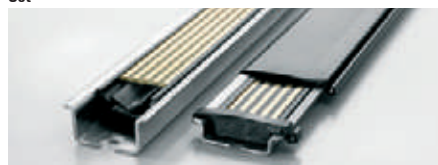


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X15/250

Ordering data

| Type | Qty. | Order No. |
|------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X15 | 1 | 1335150000 |

SET CH20M BUS 250MM TS 35X7.5

Set

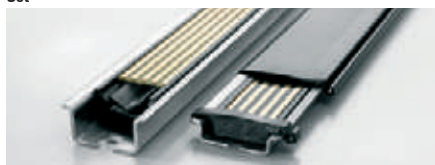


- SET consists of one each of
CH20M BUS 4.50/05 AU/250
CH20M BUS-ADP TS 35/250
CH20M BUS-AP LI TS 35X7.5 & 15
CH20M BUS-AP RE TS 35X7.5 & 15
CH20M BUS-PROFIL TS 35X7.5/250

Ordering data

| Type | Qty. | Order No. |
|-------------------------------|------|------------|
| SET CH20M BUS 250MM TS 35X7.5 | 1 | 1335140000 |

TS 35x7.5 / TS 35x15

DIN rail

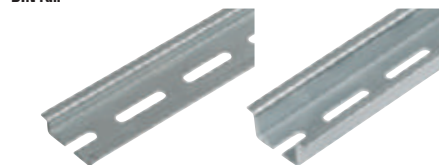

- DIN rail with slot
- Passivated galvanised steel


Ordering data

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| TS 35X7.5/LL 1M/ST/ZN | 10 | 0514510000 |
| TS 35X15/LL 1M/ST/ZN | 10 | 0236510000 |


Power-feed module for the CH20M DIN rail bus

4 A supply with backup supply and error analysis

The power-feed unit ACT20-FEED-IN-PRO-S supplies the devices on the CH20M DIN rail bus with 24 V DC. At the same time, the FEED-IN device reads the group error contact – optionally provided by the installed devices – from the CH20M rail bus and sends a message through the status relay to the external controller. Optionally, two power supplies can be connected for the primary and secondary supplies (backup). An installation in Zone 2 / Division 2 is also possible. Three LEDs show the status of the power supply and the error status.

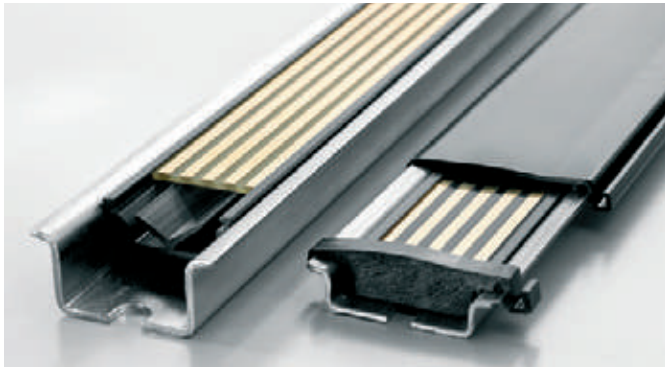

The FEED-IN-PRO can supply a maximum of 4 A to feed up to 120 devices mounted on a CH20M rail bus. Quick identification of errors on the DIN rail bus is through the internal status relay. The FEED-IN-PRO device immediately recognises and displays when a power supply has failed. The supply is then switched automatically to the redundant power supply.

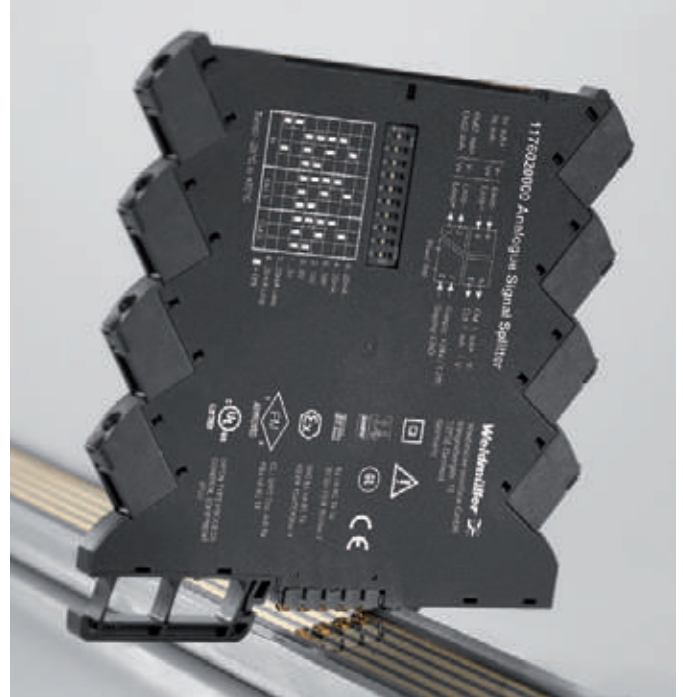


Weidmüller offers a compact and narrow 6 mm feed-in module as an alternative. This wires the terminal level directly to the DIN rail bus. Up to 80 modules can be fed with a maximum available current of 2.5 A.


ACT20 power-feed module

- Distributes the supply onto the busbar
- Compatible with Weidmüller CH20 DIN rail bus
- Optional connection for backup supply
- Approved for use in Ex-Zone 2 /Div. 2
- Monitoring of the supply voltage
- Alarm alerts via the status relay

ACT20-Feed-In-PRO-S

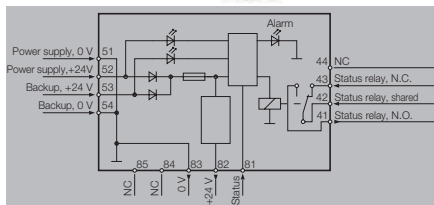

ACT20-Feed-In-BASIC-S

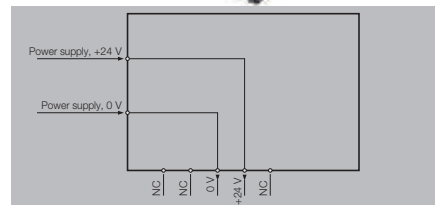

Technical data

| |
|---|
| Input |
| Supply voltage |
| Input current |
| Trigger level for the power supply |
| Output, power supply |
| Output voltage |
| Output power |
| Output current |
| Output, status relay in safe zone |
| Max. switching voltage, AC / Max. switching voltage, DC |
| Continuous current |
| AC power, max. |
| General data |
| Degree of efficiency |
| Ambient temperature |
| Power consumption |
| Protection degree |
| Weight |
| Humidity |
| Approvals |

| |
|--|
| 21.6...26.4 V DC |
| Max. 4 A |
| 21.6...26.4 V DC |
| Fault < 21 V DC |
| Input voltage -0.5 V DC / 4 A |
| 96 W |
| Max. 4 A |
| 250 V / 30 V |
| 2 A AC / DC |
| 500 VA / 60 W |
| 0,976 |
| < 2 W |
| IP 20 |
| 140 |
| 95 %, no condensation |
| cULus; DEKRAATEX; DETNORVER; EAC; FMEX; GOSTME25; IECEXDEK |

| |
|---|
| 21.6...26.4 V DC |
| 0.5...2.5 A DC |
| Corresponds to the input voltage |
| Equivalent to input current |
| 250 V / 30 V |
| 100 % |
| -20 °C...60 °C |
| IP 20 |
| 70 |
| 95 %, no condensation |
| cULus; DETNORVER; EAC; FMEX; GL; GOSTME25; IECEXKEM; KEMAATEX |

| |
|--|
| Dimensions |
| Clamping range (nominal / min. / max.) |
| Length x width x height |
| Note |

| |
|-------------------------|
| Screw connection |
| 2.5 / 0.5 / 2.5 |
| / 22.5 / 117.2 |

| |
|-------------------------|
| Screw connection |
| 2.5 / 0.5 / 2.5 |
| / 6.1 / 112.5 |

Ordering data

| |
|------------------|
| Screw connection |
|------------------|

| Type | Qty. | Order No. |
|---------------------|------|------------|
| ACT20-FEED-IN-PRO-S | 1 | 8965500000 |

| Type | Qty. | Order No. |
|-----------------------|------|------------|
| ACT20-FEED-IN-BASIC-S | 1 | 1282490000 |

| |
|-------------|
| Note |
|-------------|


Accessories

| |
|-------------|
| Note |
|-------------|

| |
|------------------------------------|
| DIN mounting rail, see Accessories |
|------------------------------------|

| |
|------------------------------------|
| DIN mounting rail, see Accessories |
|------------------------------------|

ACT20X/ACT20C/ACT20P

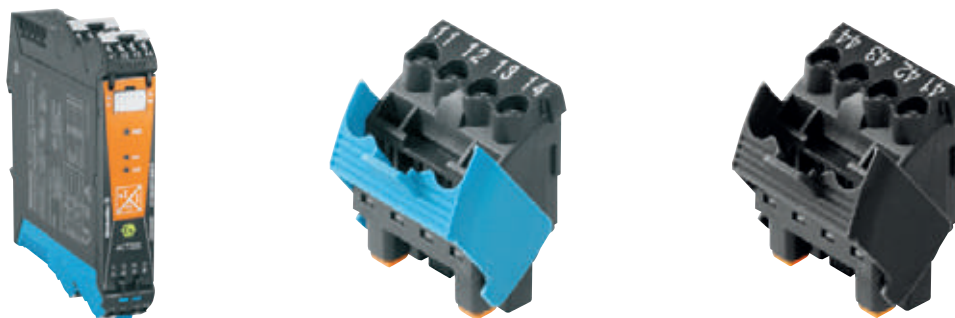

Connection terminals

| Colour of housing | Release lever colour | Connection number | Printing | Type | Order No. | | | |
|-------------------|----------------------|-------------------------------|-------------|-------------------------------|-------------------------------|------------|-------------------------------|------------|
| black | blue | 65/66/67/68 | white | BHZ 5.00/04/90LH BK/BL PRT 65 | 1086480000 | | | |
| | | 55/56/57/58 | white | BHZ 5.00/04/90LH BK/BL PRT 55 | 1086470000 | | | |
| | | 45/46/47/48 | white | BHZ 5.00/04/90LH BK/BL PRT 45 | 1086460000 | | | |
| | | 61/62/63/64 | white | BHZ 5.00/04/90LH BK/BL PRT 61 | 1086420000 | | | |
| | | 51/52/53/54 | white | BHZ 5.00/04/90LH BK/BL PRT 51 | 1086410000 | | | |
| | | 41/42/43/44 | white | BHZ 5.00/04/90LH BK/BL PRT 41 | 1086400000 | | | |
| | black | black | 65/66/67/68 | white | BHZ 5.00/04/90LH BK/BK PRT 65 | 1086240000 | | |
| | | | 55/56/57/58 | white | BHZ 5.00/04/90LH BK/BK PRT 55 | 1086230000 | | |
| | | | 45/46/47/48 | white | BHZ 5.00/04/90LH BK/BK PRT 45 | 1086220000 | | |
| | | | 61/62/63/64 | white | BHZ 5.00/04/90LH BK/BK PRT 61 | 1086180000 | | |
| | | | 51/52/53/54 | white | BHZ 5.00/04/90LH BK/BK PRT 51 | 1086170000 | | |
| | | | 41/42/43/44 | white | BHZ 5.00/04/90LH BK/BK PRT 41 | 1086160000 | | |
| | | | black | blue | 35/36/37/38 | white | BHZ 5.00/04/90LH BK/BL PRT 35 | 1086450000 |
| | | | | | 25/26/27/28 | white | BHZ 5.00/04/90LH BK/BL PRT 25 | 1086440000 |
| 15/16/17/18 | white | BHZ 5.00/04/90LH BK/BL PRT 15 | | | 1086430000 | | | |
| 31/32/33/34 | white | BHZ 5.00/04/90LH BK/BL PRT 31 | | | 1086390000 | | | |
| 21/22/23/24 | white | BHZ 5.00/04/90LH BK/BL PRT 21 | | | 1086380000 | | | |
| 11/12/13/14 | white | BHZ 5.00/04/90LH BK/BL PRT 11 | | | 1086370000 | | | |
| 11/12 | white | BHZ 5.00/02/90LH BK/BL PRT 11 | | | 1086250000 | | | |
| 21/22 | white | BHZ 5.00/02/90LH BK/BL PRT 21 | | | 1086260000 | | | |
| black | black | 35/36/37/38 | | white | BHZ 5.00/04/90LH BK/BK PRT 35 | 1086210000 | | |
| | | 25/26/27/28 | | white | BHZ 5.00/04/90LH BK/BK PRT 25 | 1086200000 | | |
| | | 15/16/17/18 | | white | BHZ 5.00/04/90LH BK/BK PRT 15 | 1086190000 | | |
| | | 31/32/33/34 | | white | BHZ 5.00/04/90LH BK/BK PRT 31 | 1086150000 | | |
| | | 21/22/23/24 | | white | BHZ 5.00/04/90LH BK/BK PRT 21 | 1086140000 | | |
| | | 11/12/13/14 | | white | BHZ 5.00/04/90LH BK/BK PRT 11 | 1086130000 | | |
| | | 41/42 | white | BHZ 5.00/02/90LH BK/BK PRT 41 | 1086040000 | | | |

Cold-junction compensation terminals (optional for the ACT20X temperature modules)

| 1-channel | Release lever colour | Connection number | Printing | Order No. |
|-----------|----------------------|-------------------|----------|------------|
| black | blue | 11/12/13/14 | white | 1160640000 |
| 2-channel | | | | |
| black | blue | 11/12/13/14 | white | 1160650000 |



Markers

| Type | Version | Dimensions | Qty. | Order No. |
|------------------------|---|-------------|------|------------|
| ESG 66/20BHZ500/04 | Individual markers | 6.6 x 20 mm | 200 | 1082540000 |
| ESG 8/13,5/43,3 SAI AV | MultiCard (24 individual markers per MultiCard) | 8 x 13.5 mm | 5 | 1912130000 |

ACT20M



Ordering data markers

| |
|---------------|
| ACT20M marker |
| Note |

| Type | Qty. | Order No. |
|--|------|-------------------|
| MS 5/7,5 MC NEUTRAL | 320 | 1877680000 |
| The ACT20M voltage supply is cross-connected using the CH20M rail bus. Details are available on pages C.14 and G.6 | | |

ACT20P



Ordering data markers

| |
|-------------------|
| ACT20P/X/C marker |
| Note |

| Type | Order No. |
|------------------------|-------------------|
| ESG 8/13.5/43.3 SAI AU | 1912130000 |

Accessories MCZ



Ordering data end plates

| Type | Qty. | Order No. |
|-----------|------|-----------|
| End plate | | |

| Type | Qty. | Order No. |
|------------|------|------------|
| AP MCZ 1.5 | 50 | 8389030000 |



Ordering data cross-connection

| Type | No. of poles |
|----------------------------------|--------------|
| Plug-in cross-connection, yellow | 2 |
| Plug-in cross-connection, yellow | 3 |
| Plug-in cross-connection, yellow | 4 |
| Plug-in cross-connection, yellow | 10 |

| Type | Qty. | Order No. |
|----------------|------|------------|
| ZQV 4N / 2 GE | 20 | 1758250000 |
| ZQV 4N / 3 GE | 20 | 1762630000 |
| ZQV 4N / 4 GE | 20 | 1762620000 |
| ZQV 4N / 10 GE | 20 | 1758260000 |

G



Ordering data markers

| Type | Qty. | Order No. |
|----------------------------|------|-----------|
| Multicard connector marker | | |

| Type | Qty. | Order No. |
|-----------|------|------------|
| WS10/6 MC | 600 | 1828450000 |

WAVE Accessories



Ordering data cross-connection

| Type | No. of poles |
|----------------------------------|--------------|
| Plug-in cross-connection, black | 2 |
| Plug-in cross-connection, red | 2 |
| Plug-in cross-connection, blue | 2 |
| Plug-in cross-connection, yellow | 2 |

| Type | Qty. | Order No. |
|---------------|------|------------|
| ZQV 2,5N/2 sw | 60 | 1718080000 |
| ZQV 2,5N/2 rt | 60 | 1717900000 |
| ZQV 2,5N/2 bl | 60 | 1717990000 |
| ZQV 2,5N/2 ge | 60 | 1693800000 |



Ordering data markers

| Type | Qty. | Order No. |
|----------------------------|------|-----------|
| Multicard connector marker | | |
| Multicard connector marker | | |
| Multicard connector marker | | |

| Type | Qty. | Order No. |
|------------------|------|------------|
| WS 10/5 MC NE WS | 920 | 1635000000 |
| WS15/5 MC | 480 | 1609880000 |
| WS10/6 MC | 600 | 1828450000 |

Screw-connect connector strip for the WAVESERIES**3-pole**

| Type | Printing | Order No. |
|------------------------|------------|------------|
| BLZ 5.08/3 SN OR BEDR. | 1, 2, 3 | 2242030000 |
| BLZ 5.08/3 SN OR BEDR. | 4, 5, 6 | 2242050000 |
| BLZ 5.08/3 SN OR BEDR. | 7, 8, 9 | 2242060000 |
| BLZ 5.08/3 SN OR BEDR. | 10, 11, 12 | 2242070000 |

2-pole

| Type | Printing | Order No. |
|---------------------------|-------------------|------------|
| BLZ 5.08/02/180 SN OR BX | without labelling | 1526460000 |
| BLZ 5.08/02/180 SN OR PRT | 1, 2 | 2246070000 |
| BLZ 5.08/02/180 SN OR PRT | 3, 4 | 2246080000 |
| BLZ 5.08/02/180 SN OR PRT | 5, 6 | 2246090000 |
| BLZ 5.08/02/180 SN OR PRT | 7, 8 | 2246100000 |

Portacal 1000EU

Calibration device for current and voltage signals

The Portacal 1000EU is a calibration device which is controlled by a microprocessor. It is used for current and voltage signals. It has three output modes for simulating signals:

- **Voltage source:** for the simulation of externally-supplied voltage transmitters
- **Current source:** for the simulation of externally-supplied current sensors
- **Current sink mode:** simulates the outputs of a two-wire (loop-powered) transmitter.

Commonly used calibration functions can be invoked for each mode by pressing a button. Up to 9 storage locations per mode are available to save the individual values.

Furthermore, the Portacal 1000EU can be programmed in a way that all modes can be cycled automatically. The corresponding values are controlled continually for a pre-defined time by means of a value storage. The following values can be checked and parameterised:


- Voltage outputs
- Current outputs
- Two-wire transmitter outputs

The Portacal 1000EU provides the necessary voltage supply for the sensor in order to check a two-wire transmitter.

Technical features:

- Complete diagnosis tool for current and voltage supply
- Measuring and simulating of voltage and current signals
- Simulation of function of signal transmitter, which can be auxiliary-powered or process-powered (two-wire type)
- Continually adjustable step and ramping function
- Accuracy < 0.05 % in all signal domains
- Light and portable
- Supply via NiMH rechargeable battery or comparable battery
- Signal tone at the press of a button

Typical application of Portacal 1000EU

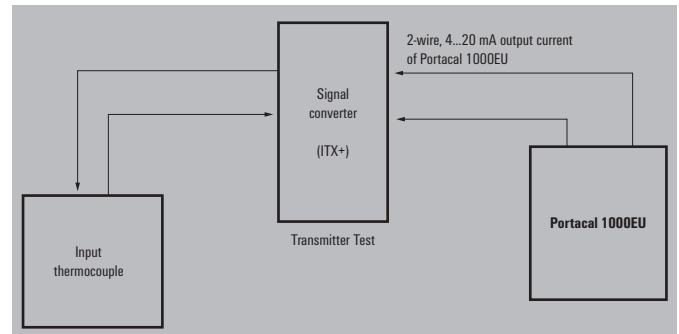

PORTACAL 1000EU

Instrument Calibrator

Technical data


| | |
|---|---|
| Output voltage mode | |
| Output voltage | 0...13 V |
| Resolution | 0.01 V |
| Load current | 0...10 mA |
| Accuracy | ±5 mV |
| Residual ripple | < 1 mV |
| Internal storage | Nine user-defined voltages |
| Output current mode | |
| Output current | 0...26 mA |
| Resolution | 0.01 mA |
| Load resistance | 600 Ω @ 20 mA (power source) 100 Ω (current sink) |
| max. input voltage current sink | 9...45 V DC |
| Accuracy | ±5 µA |
| Residual ripple | < 1 µA |
| Internal storage | Nine user-defined currents |
| Input voltage mode | |
| Input voltage | 0...13 V |
| Input resistance | 200 kΩ |
| Accuracy | ±5 µA or ±1 digital step |
| Input current mode | |
| Input current | 0...26 mA |
| Input resistance | 47 Ω |
| Accuracy | ±5 µA or ±1 digital step |
| Loop powered mode | |
| Type | Mode for loop-powered signal-converters |
| Input current | 0...26 mA |
| Feed voltage | 16 V ±10 % |
| Accuracy | ±5 µA or ±1 digital step |
| Auto step/ramp mode | |
| Step | Output of each value within a certain time period |
| Ramp | Output via a programmed ramp function |
| Number of recorded values | 2...9 |
| Time interval | 10...4200 s |
| Display | |
| Type | Four-digit display with LCD, 12 mm |
| Status indicator | Five LEDs for output mode, signal amplification and reduction |
| Display value | Percent or real-value displayed |
| Keyboard | |
| Type | 16 buttons with acoustic signal |
| Calibration | Adjustable fixed values: 0, 2, 4, 8, 10, 12, 16, 18, 20 mA 0, 1, 2, 4, 5, 6, 8, 9, 10 V Nine freely-definable values 1 / 0.1 / 0.01 mA or V |
| Memory | |
| Decimals | |
| General data | |
| Supply voltage | Battery, 4x type 'AA' |
| Temperature coefficient | < 0.01 % / °C at 100 % |
| Ambient temperature (operational)/storage temperature | 0 °C...60 °C / -25 °C...+70 °C |
| Type of connection | Sockets |
| EMC standard | DIN EN 61326 |
| Approvals | CE, cULus |
| Dimensions | |
| Length x width x height | 44 x 100 x 180 mm |
| Note | |

Ordering data

| Type | Qty. | Order No. |
|--|------|------------|
| PORTACAL 1000EU | 1 | 1439640000 |
| 2 x 1 m test cable sw/rt with banana plug/terminal | | |

Accessories

| | |
|-------------|--|
| Note | |
|-------------|--|

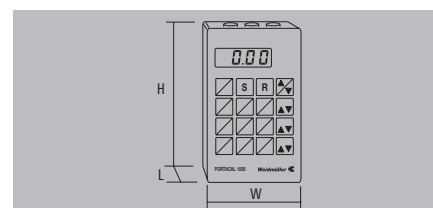

Portacal 275

Hand-held signal source and loop calibrator

The Portacal 275 is a precise hand-held signal source for current and voltage signals. It can be used in four modes which allows the calibration of standard current/voltage transmitters.

The operating mode "voltage source" simulates auxiliary-powered transmitters with proportional voltage outputs. The mode "current source" allows emulation of transmitters with proportional current outputs. The "mv source" mode simulates a variety of other analogue signals from many different applications. The "current sink" mode simulates the outputs of a two-wire (loop powered) transmitter.


The Portacal 275 is equipped with a scalable potentiometer (0 to 100 %) that can be adjusted in steps to an accuracy of 0.1 %. Together with the output-range switch, the potentiometer allows for a quick and precise adjustment of the signal value. A typical accuracy of ± 0.25 % is possible. An integrated test point, for connecting external measurement devices, allows for a higher accuracy of ± 0.1 %.

Technical features:

- Light and portable device
- Simulates loop-powered transmitter operation
- LED for indication of source/sink operating mode
- Current ranges: 0 to 20 mA / 4 to 20 mA / Voltage ranges: 0 to 5 V / 1 to 5 V / 0 to 200 mV
- 0.1 % accurate current source
- Test points for current output monitoring
- Switch select 0 %, 100 % or variable output
- Signal outputs can be adjusted with spindle potentiometer for high accuracy
- Powered from two 9 V block batteries

Portacal 275

Calibration device for current and voltage signals

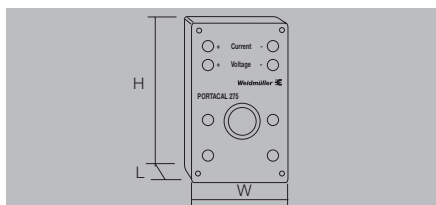

Portacal 275



Technical data

Output of voltage mode

| | |
|-------------------|---|
| Output voltage | 0...5 V / 1...5 V; 0...200 mV / 40...200 mV |
| Resolution | 0.01 V |
| Output resistance | 250 Ω @ V / 10 Ω @ mV |
| Accuracy | < 0.2% (0% and 100%) |

Output current mode

| | |
|---------------------|--|
| Output current | 0...20 mA |
| Resolution | 0.01 mA |
| Last resistor, max. | 700 Ω (current source) (V _{out} - 4) / 0.02 Ω (current sink) |

| | |
|-------------------------------------|----------------------|
| Output voltage, max. @ current sink | 4...45 V DC |
| Accuracy | < 0.1% (0% and 100%) |
| Residual ripple | < 1 μA |

Settings

| | |
|---------------------|--|
| Range of adjustment | 0...20 mA / 0...200 mA (current source), 0...5 V (voltage source) or as current sink selectable with toggle switch |
|---------------------|--|

| | |
|------------------|--|
| Output, variable | 0...100 % with precision potentiometer |
| Output, fixed | 0 or 100 % with toggle switch |

General data

| | |
|-------------------------|---|
| Temperature coefficient | typ. 40 ppm @ °C |
| Accuracy | 0.25 % of signal range |
| Supply voltage | Batteries, 2 x 9-V blocks 6...22 mA (current source) 2 mA (current sink) |
| Ambient temperature | 0 °C...60 °C |
| Storage temperature | -25 °C...70 °C |
| Type of connection | Socket |
| EMC standards | DIN EN 61326 |
| Approvals | CE; cULus; EAC |

Dimensions

| | |
|-------------------------|---------------|
| Length x width x height | 31 / 62 / 112 |
|-------------------------|---------------|

Note

Including two one-metre-long test leads sw/rt with banana plug/terminal and one bridge lead

Ordering data

| | | |
|------|------|-----------|
| Type | Qty. | Order No. |
|------|------|-----------|


| | | |
|------|---|------------|
| P275 | 1 | 7940010202 |
|------|---|------------|

Note

Accessories

Note

Wiring diagram

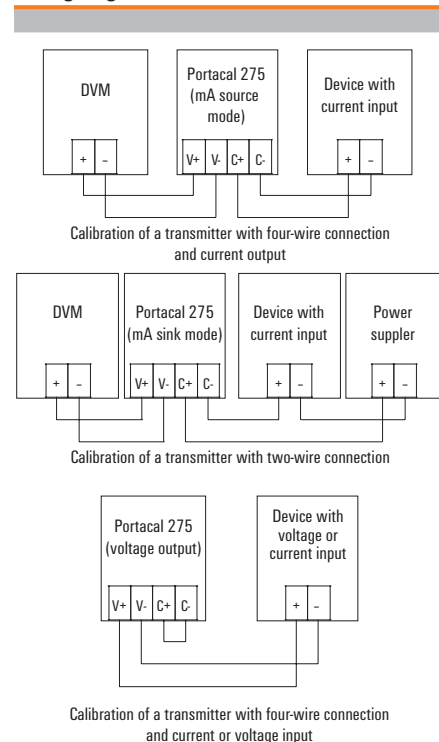


Technical appendix/Glossary



| | | |
|------------------------------------|--|------|
| Technical appendix/Glossary | Dimensioned drawings | W.2 |
| | Introduction | W.4 |
| | Technical data | W.6 |
| | FDT/DTM - The standard solution for device configuration | W.10 |
| | EX basics | W.12 |
| | ATEX | W.18 |
| | Electrical data | W.20 |
| | General technical information | W.22 |
| | Glossary | W.23 |

Dimensioned drawings


ACT20M - Dimensioned drawings

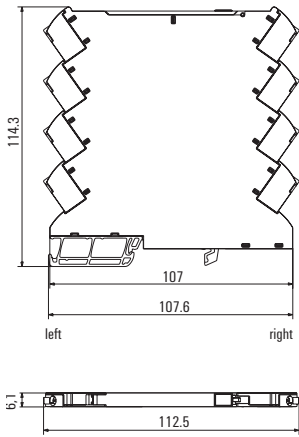


MICROSERIES

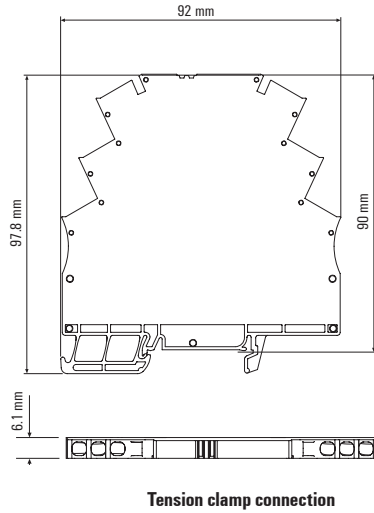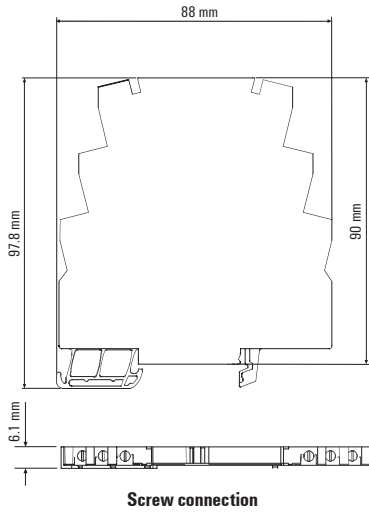

ACT20X/ACT20C/ACT20P

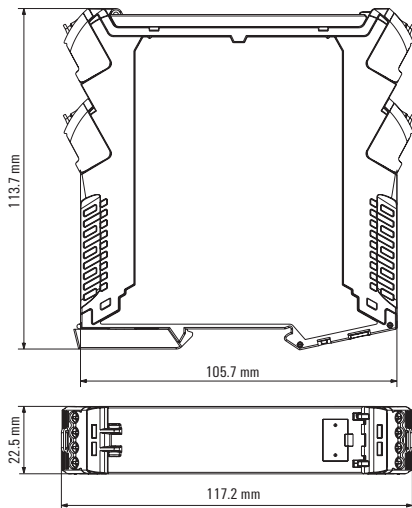


ACT20X HUI-SAO-LP-S

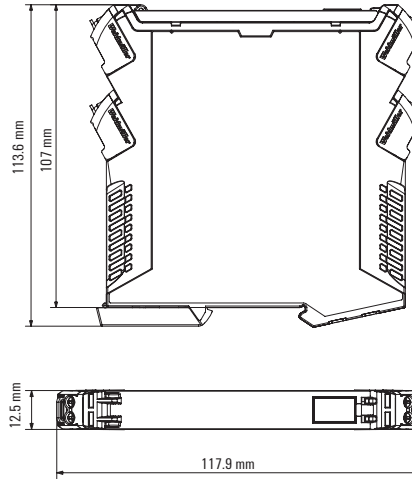


W


WAVEBOX S 22,5

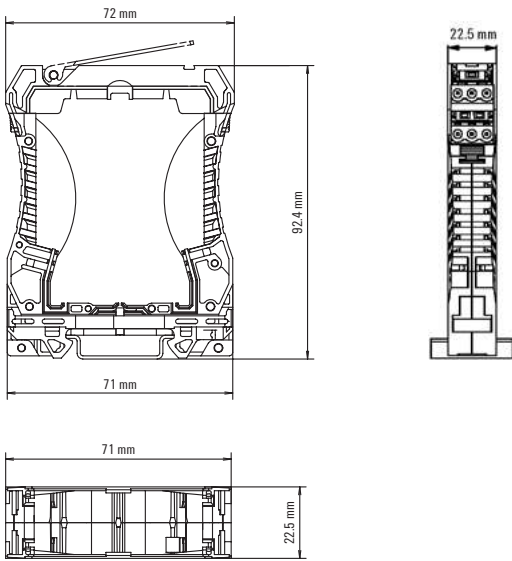


WAVEBOX L 22,5

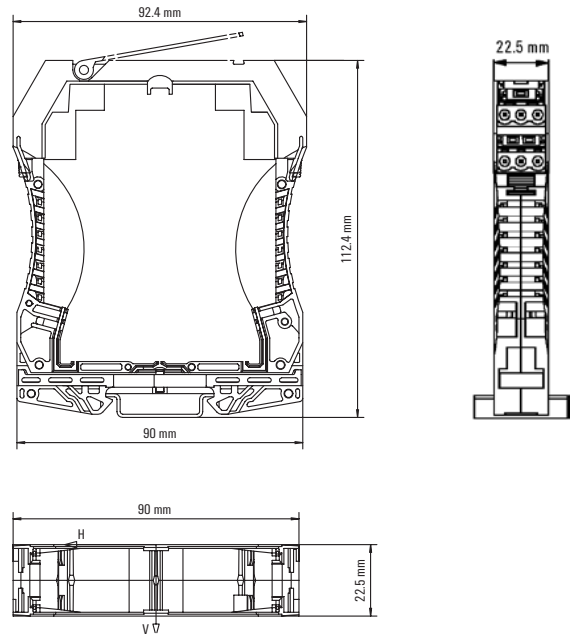

WAVEBOX 12,5

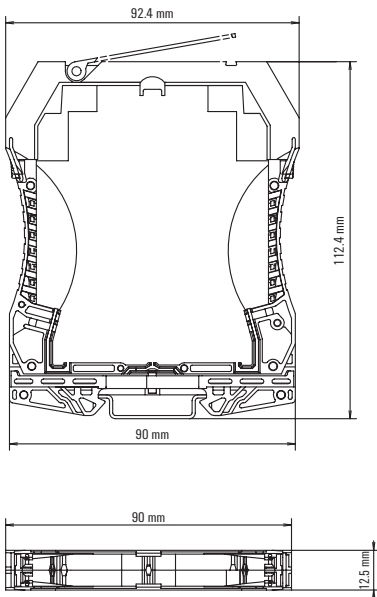

WAVEBOX 17,5

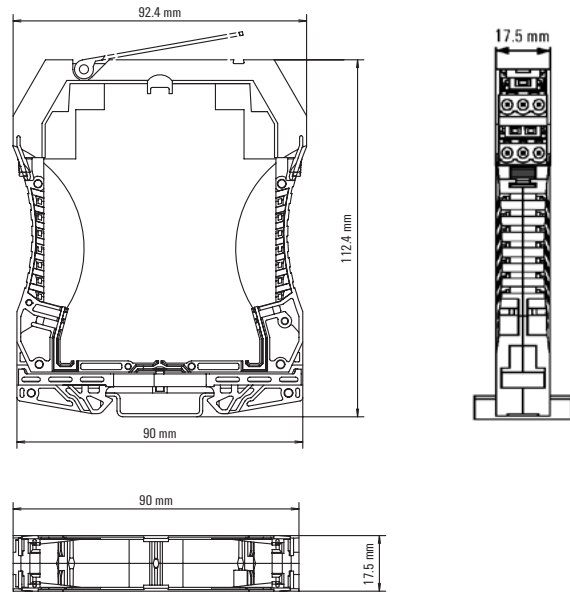

Different types of analogue signalling

The working environment can be measured in many different forms, e.g. in terms of temperature, humidity or air pressure. The values of these physical variables change constantly. Components that monitor the status and changes of a given environment and provide alerts of any changes must be able to continuously display the changes taking place.

In industrial and process automation, the outputs received from field sensors, switches and transmitters provides measurement and status data which becomes the analogue and digital inputs (AI and DI) for the control system. Similarly, control signals are passed from the control system to field control equipment such as analog and digital valves and actuators.

If automation processes are expected to reach certain statuses or keep them constant, then analogue signal conditioning is required. It is also important in areas where this has already been part of long established practice, e. g. in process engineering or the chemicals industry.

In process engineering, standardised electrical signals are normally used. Currents of 0 ... 20 mA, 4 ... 20 mA or voltages of 0 ... 10 V have become established as the output variables for sensors recording various different physical parameters.

Weidmüller takes account of the growing preference for automation – including and the resulting need for analogue signal conditioning – and offers a wide range of products tailor-made to the requirements involved in handling sensor signals. Units for the common signals (0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V) generate an output signal as a proportional value of the variable input signal. "Protective separation", e.g. of the sensor circuit from the evaluation circuit, is also taken into account. "Protective separation" prevents mutual interference among several sensor circuits, e.g. as in the case of earth loops in interlinked measuring circuits.


The wide range of Weidmüller products completely covers the functions involved in signal conversion, signal separation and signal monitoring. The products can thus handle nearly all applications in industrial measuring technology, and safeguard elementary functions between field signals and further processing systems. The mechanical properties of the products are built up around a consistent concept.

Signal converters can be used with other Weidmüller products and combined with each other. They are designed to entail a minimum wiring workload and maintenance in both electrical and mechanical terms.

The product range contains the following functions:

- DC/DC converters
- Current converters
- Voltage converters
- Temperature converters for resistance thermometers (RTDs) and thermocouples
- Frequency converters
- Potentiometer transducers
- AC transducers
- Bridge transducers (strain gauges)
- Threshold monitoring modules
- AD/DA converters

The products are available as pure signal converters, or with 2-port or 3-port isolation and a choice of passive or output loop powered or auxiliary powered, depending on the application requirements.

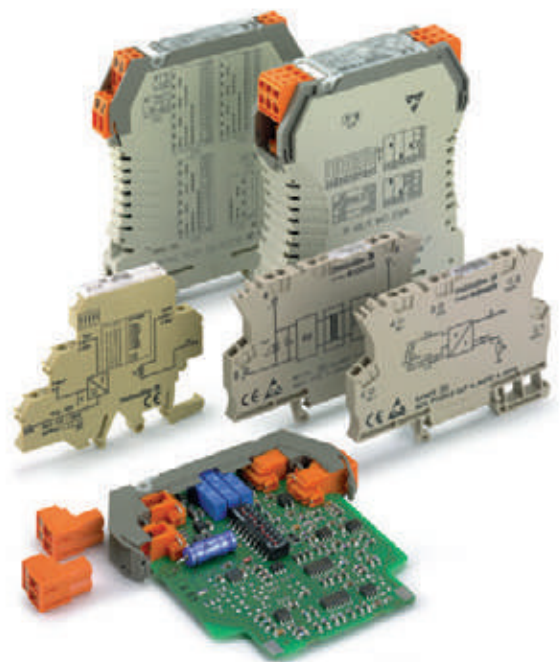

2-way isolation separates the signals from each other electrically and decouples the measuring circuits. Potential differences – caused by long line lengths and common reference points – are eliminated. Furthermore, the electrical separation protects against irreparable damage caused by overvoltages as well as inductive and capacitive interference.

3-way isolation decouples the supply voltage from the input and output circuits as well and enables the function to operate with just one operating voltage.

The **passive separator** offers an extra, decisive advantage – it requires no additional voltage supply. The power supply to the module is achieved via the input or output circuit and is transmitted to the input/output. This current loop feed is characterised by a very low consumption.

A number of products are available for temperature measurements. For example, **PT100** signals in 2-, 3- and 4-wire systems are converted into standard 0...20 mA, 4...20 mA and 0...10 V signals.










The modules for connecting conventional **thermoelements** are fitted with cold trap compensation as standard. Furthermore, they amplify and linearise the voltage signal provided by the thermocouple. This guarantees accurate analogue signal conditioning while eliminating sources of interference or error.

Frequency converters convert frequencies into standard analogue signals. Downstream controls can therefore directly process pulse strings for measuring rpm or speed.

AD or DA converters are required for bringing together the analogue signal forms mapping the local conditions and the digital processing in the process monitoring system. Weidmüller can supply such components for the customary 0...20 mA, 4...20 mA and 0...10 V input and output signals. 8-bit processors are available on the digital side.

Current-monitoring modules can be used to control DC and AC currents up to 60 amps. A switching operation is triggered when the set current values are not met or exceeded. Components with analogue outputs monitor the current load continuously via downstream controls.

Voltage monitoring modules can be used to monitor AC and DC voltages. Adjustable switching thresholds can be used to reliably detect and notify in the event of fluctuations caused by switching operations or mains overloads.

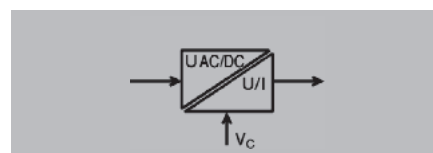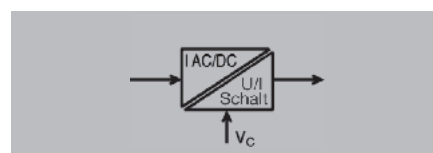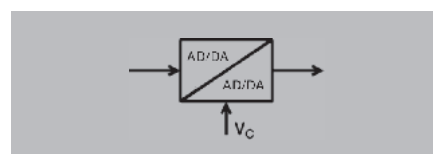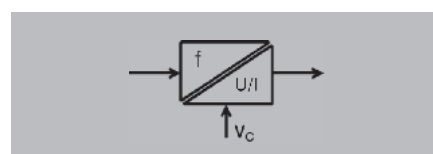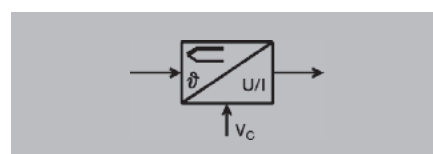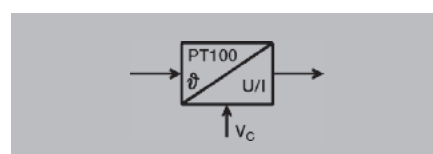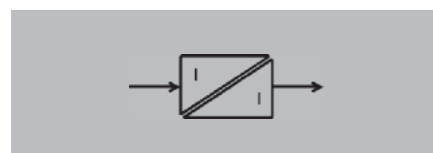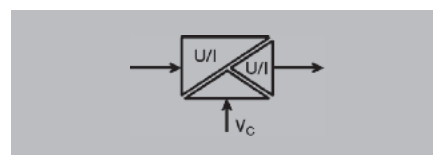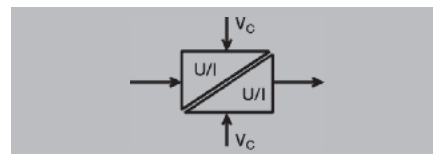


Technical data



Common Mode Noise Elimination

- Generally, signals emitted by sensors have low levels and are thus susceptible to capacitive and inductive interference, such as those generated by motors, frequency changers and other change processes. This noise contents the measuring value and frequently destroys expensive analog I/O cards in the control electronics. Through the utilisation of analogue signal isolators this interference, which usually actions both signal lines in common mode (push push), is effectively eliminated through the zero potential input.

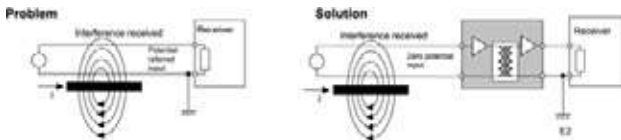


Active Isolator / Passive Isolator

- Active isolators draw their power supply from a separate supply terminal to ensure that they can operate perfectly. Depending upon the applications the input, output and additionally the power supply are isolated from each other. Only one supply is required for 3-port isolation. However, it is isolated from the input and output circuits. Thus even in the event of a short circuit, surge voltage or reverse polarity, the downstream control electronics cannot be damaged. Isolating the signals between the input and output can be conducted either optically or by transformer barrier depending upon the transfer rate. Active isolators are non interacting, i.e. a change in the load does not exert any influence on an input circuit.
- Passive isolators generate the current required for the supply from the measuring signal. The current required internally is so small that transfer problems do not occur here.
- The feed can be effected from either the input or the output side. Isolation is by transformer barrier. The advan-

tages are: cessation of network influences, outstanding accuracy, low signal delay and low potential requirement. Passive isolators are not interacting; a change in load in the output circuit will influence the input circuit.

Ground Loops

- The voltage supply's secondary side is earthed for the purpose of setting up fast and secure ground loop monitoring. If an analogue signal is fed in from a separate voltage supply or if the sensing device itself is earthed, then transient currents will flow between the ground potentials across the interconnected ground connectors, which in turn corrupts the measuring signal. Analogue signal isolating amplifiers prevent this form of measuring signal corruption and influence.

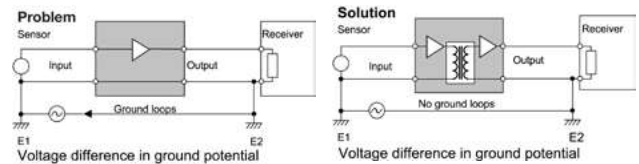


2-port Isolation

- The simplest form of analogue signal isolator is that of 2-port isolation. It serves to isolate the input circuit from the output circuit as well as the two auxiliary voltages from each other. Depending upon the isolator design and the observed isolation data one refers here to base isolation (galvanic isolation) or safe separation. ① For current signals, 4...20 mA input current loop fed modules are available. An additional auxiliary voltage for the input circuit is not required here. ② By connecting the input and output side voltage supplies, the 2-port isolation can be converted to operate as a simple signal converter. This is of particular interest where isolation is not required for an application, but a signal conversion has to be performed.




3-port Isolation

- 3-port isolation is the most universal form of signal isolator
- An optical coupler or transformer isolates the input from the output circuit. Together with the clearance and creepage distances it serves to define the isolation level. For example, the input signal is converted by means of pulse-width modulation into a frequency signal and demodulated again on the output side to form an analogue value. An amplifier then generates a standardised analogue signal. A galvanic isolated DC/DC converter feeds the input and output circuit with a potential free supply voltage. It also determines the isolation level through its data, air and creepage distances. In the case of these three isolation paths (input/output, input/auxiliary voltage, output/auxiliary voltage) one refers to 3-port isolation.

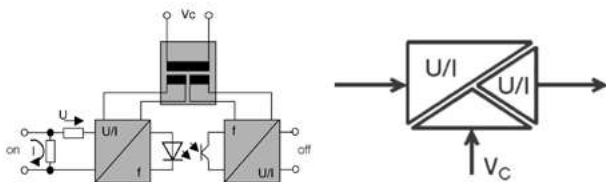

Temperature Signal Measuring Method

- Measurement using resistors (RTD)
When measuring with temperature-dependent resistors a current of approx. 1.5 mA is passed through the resistor from a constant current source in the signal converter.

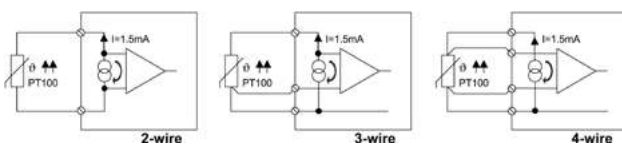

An operational amplifier is used to measure the potential drop at the resistor (2-wire circuit).

In order to take account of lead length, the voltage drop is measured at the return conductor and calculated with double the value (3-wire circuit). This simulates the wire resistances from the feed and return lines.


Accurate measurements are achieved by separately measuring the voltage drop at the feed and return lines (4-wire circuit). The values for the supply lines are calculated against the measured value.

Temperature Signal Measuring Method

- Measurements using thermocouples
When conducting measurements using thermocouples the voltage that is generated when two differently alloyed metals come into contact with each other is measured. A differential amplifier is then used to recondition the signal. The easiest (and the most cost-effective) method of subsequent processing is conducted by means of an amplifier circuit, which converts these signals into standard signals. High-end components process the measuring signal using a microprocessor, which simultaneously reconditions the signal (filtering, linearisation)

Cold Junction Compensation For Thermocouples

- Recording temperatures by using thermocouples encounters the problem of a thermal voltage forming at the clamping terminals on the signal converter on account of the different materials in the conductors and bus bar. This voltage then counteracts the thermal element's voltage.




In order to compensate for the error to the measured value which arises here, the temperature is measured at the clamping terminal. The microprocessor in the signal converter reads the value measured there and calculates it against the measured value. This procedure is known as cold junction compensation.

$$\frac{\text{Voltage at the measuring point } (V_{\text{meas}}) + \text{Voltage at the terminal } (V_{\text{terminal}})}{\text{Voltage at the thermocouple } (V_{\text{thermo}})} \Rightarrow \text{Temperature at the thermocouple } (T_{\text{thermo}})$$

Linearisation

- Temperature-dependent components do not normally have linear characteristic curves. To ensure that further processing can take place with the necessary accuracy, these characteristic curves have to be linearised to some extent. The graph showing measurements of thermocouples, in particular, reveals significant deviations at some points from the "ideal graph". As a consequence, the signal which has been measured is worked up by microprocessor.

Technical data

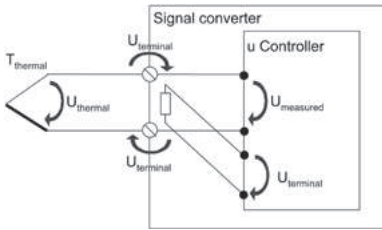


The microprocessor compares the value measured with the characteristic curve for the thermocouple in its memory and calculates the corresponding value on the "ideal characteristic curve". At the output, it supplies the latter to an amplifier, which produces the analogue value in linear form. The output stage converts this into a standardised value or into a switching output with a switching threshold.


The linearisation of PT100-elements can be undertaken via simple amplifier stages. The first stage corrects the peak value of the graph of the measurements. The deviation at the end of the graph resulting from this is corrected by a second stage. The under- and overshooting generated in this way is very slight and is covered by the tolerance for the module.

Current Measurement Using A Measuring Transformer

- Transformer principle: Each conductor through which current flows is surrounded by a magnetic field H, the intensity of which is proportional to the current. The field, which is bundled in a magnetic core, generates a magnetic flux B, through which suitable sensors are used to measure current.

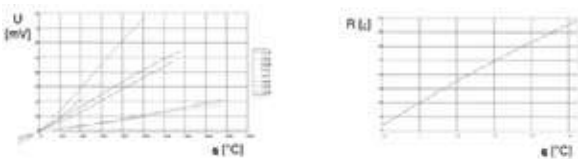


Converters with transformer-type couplings are used to establish the most cost effective measurement method for simple sinusoidal currents. The current to be measured flows directly through the measuring transformer's primary winding.



The secondary winding supplies the measuring electronics with a proportional current signal. Because of power loss this method of measuring current is limited to smaller currents up to 5 A. These converters react sensitively to peak loads and therefore have to be fused on the primary winding side.

Measuring Current Using A Hall-type Sensor

- Hall-type sensor principle: Hall-type sensors also measure the magnetic flux B and supply a proportional voltage at the measured output, which is then reconditioned to form a standard signal by an amplifier circuit.
- Components with Hall-type sensors are ideally suited to measuring higher currents, as any possible high residual currents from motors or peak loads cannot damage the component. Additionally, they are also ideal for measuring direct and alternating currents of various curve shapes.




Root Mean Square Measurement / Crest Factor

- The root mean square value (r.m.s) of a sinusoidal shaped alternating current is the value, which in an ohmic resistor converts the same (effective) output as that of an equal sized direct current.
- Non sinusoidal shaped signals can only be measured with "True RMS" capable devices and/or further processed.
- True RMS = True root mean square
- Root mean square measurement is required where the (effective) output content of alternating voltages or currents are to be measured or evaluated.
- The crest factor indicates the ratio of the crest factor to the root mean square value.

W

Load / Load Resistor

- The load is a load resistor on the output side of a measuring transducer or isolating amplifier. The load is usually less than 500 Ω at the current outputs. Voltage outputs are normally under a load greater than 1 KΩ.

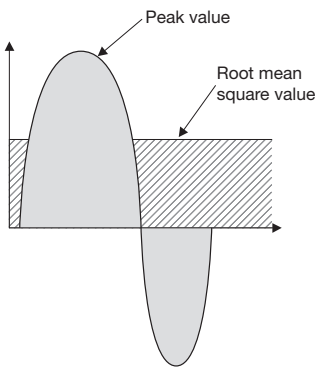

Galvanic Isolation / Safe Separation

- Galvanic isolation is understood to mean an electrical isolation between the input and output circuit and the circuit's supply voltage. It can be set up either optically using an opto coupler or with a transformer. The isolation serves to safeguard the measuring circuit against damage and to eliminate ground loops, which could cause the measured signal to be corrupted.
- Safe separation is specified under the German DIN VDE 0106 Section 101 standard. This fundamental safety standard is intended to safeguard persons against hazardous body currents and describes the basic requirements for safe separation in electrical operating equipment. Thus, for instance, the voltage supply of 50 V AC/ 75 V DC as under 50178 may not be exceeded. If this voltage is exceeded a reinforced or double insulated and thus an increase in the clearance and creepage distances is stipulated.

Cut-off Frequency

- Cut-off frequencies indicate the dynamic transfer characteristic of an isolation amplifier.
- The given frequency is the (-3dB-) limit, at which a distinct change occurs to the signal.
- An increased cut-off frequency leads to a transmission of higher-frequency alternating components, which corrupts the required signal.

Hysteresis

- Hysteresis indicates the percentage difference between the input and output points of a switching contact. It should not be lower than a given minimum value, as otherwise a specified chase can no longer be implemented.

Broken-wire Detection

- When measuring transformers with broken wire detection the input signal is monitored permanently. In the event of a fault (broken wire) the output signal exceeds its rated range. The downstream control circuit can then analyse the fault case.

Response Time

- Response time refers to the change in output signal for an input signal jump (10 ... 90 %). It is directly related to the cut-off frequency (inversely proportional).

Accuracy / Temperature Coefficient

- Accuracy describes the capability of a measuring device to deliver a measured value as accurately as possible. It relates to the end value and is given for ambient temperature (23 °C). Example:
An RTD is given with an accuracy of 1 %. The measuring range is set to 0 – 200 °C. The expected effective error of: $200 \cdot 1 \% = \pm 2K$ applies across the entire measurement range.
- Temperature coefficient describes the deviations in accuracy of the measuring devices dependent on the ambient temperature. It is given as a % or in parts per million / Kelvin (ppm /K).
Example:
An RTD with an accuracy of 1 % and a measuring range of 0 – 200 °C has a temperature coefficient of 250 ppm / K. If the device is operated at +40 °C, it will then contribute the following to an expected absolute error: $(([40 \text{ °C} - 23 \text{ °C}] \cdot 250 \text{ ppm/K}) + 1 \%) \cdot 200K = \pm 2,85K$ across the entire measurement range.

FDT/DTM – The standard solution for device configuration

Field Device Tool (FDT)

FDT technology specifies and standardises the integration of communicating devices from different manufacturers. It makes use of a superimposed device management program. The key feature is its independence from the communication protocol and software used by the device and the host system. FDT allows access to any device from any host using any protocol.

Device Type Manager (DTM)

Device manufacturers make available a Device Type Manager (DTM) software driver for each device or device group. The DTM specifies all device-specific information, functions and rules (such as the device structure, communication capabilities, internal dependencies and the human-machine interface (HMI)). DTMs define functions for access to device parameters, troubleshooting, configuration and operation of devices. DTMs are available which can be simple GUIs for setting device parameters or more complex applications that are capable of carrying out calculations for diagnostic or maintenance purposes.

There are several different types of DTMs:

- **Device DTM**
This is a “normal” field device that uses communication channels to communicate with the connected physical device.
- **Communication DTM**
This is a communications device that provides communication using communication channels. Communication channels provide access to the communications infrastructure (such as PC interface cards or modems). They are used by device DTMs or gateway DTMs for communication services.
- **Gateway DTM**
This is a gateway device. It allows data to be exchanged between two communication channels. For example, this could be a gateway between PROFIBUS-DP and PROFIBUS-PA.

The DTM is loaded and started up within a FDT container program or “frame” application.




FDT frame application

Frame applications can be used as a tool to configure devices, plan projects, operate consoles or administer facilities. The FDT frame application provides a PC software environment with the following functions:

- User administration
- DTM administration
- Data management
- Network configuration
- Navigation

Weidmüller offers their WI-Manager FDT frame program to the user for no cost. This certified software is compatible and works together with all certified DTMs. This screenshot shows the WI-Manager with an opened DTM for the ACT20X series.

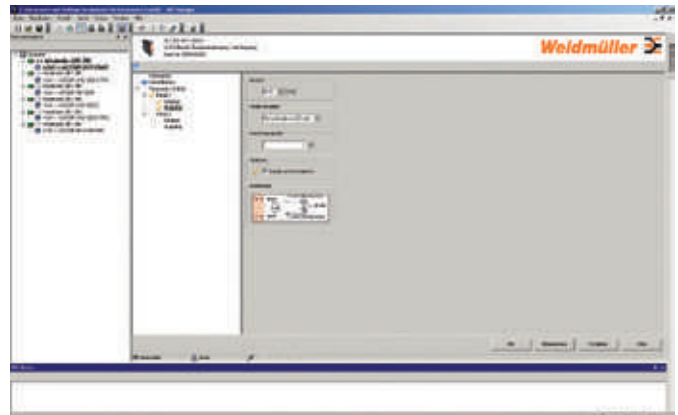

Download at www.weidmueller.com/



FDT User Group

The FDT User Group is an alliance of users and manufacturers interested in defining the specifications and moving the FDT/DTM technology forward. Weidmüller is a member of this group along with most process automation manufacturers and work towards advancing this standard further.

More details are available at <http://www.fdtgroup.org/>

Safety in hazardous areas

When operating electrical devices within hazardous areas, you must comply with the requirements regulating their use in such zones. Explosive atmospheres may be created from mixtures of flammable gases, mists, vapours or dusts. If their concentration is high enough in the surrounding air, any source of ignition or spark could trigger an explosion. Such explosions can cause death, serious injuries and significant property damages.

There are basically two strategies for reducing the risk of explosion. Firstly, no dangerous materials should be released into the air that could create an explosive atmosphere.


Secondly, there should be no mechanism present that could create a spark.

Many explosions in the past could have been avoided if only the international regulation governing the use of equipment in hazardous areas had been observed.

But what are the most important global regulations regarding the use of devices in hazardous areas?

In North America, the US National Electric Code (NEC) regulations (Articles 500 to 505 and the Canadian CEC (Canadian Electrical Code) Articles 18-000, -090, -100, -200 and -300 are all valid.

In Europe, both EU directives ATEX 95 (94/9/EG) and ATEX 137 (1992/92/EC) are relevant. They describe preparation (ATEX 95) and usage (ATEX 137) for facilities in potential Ex zones. Throughout the rest of the world, there is a mixture of national regulations (in Eastern Europe) and international IECEx conformity declarations (in Asia) that must be followed. In certain Asian countries, the European ATEX directives have been accepted and applied.

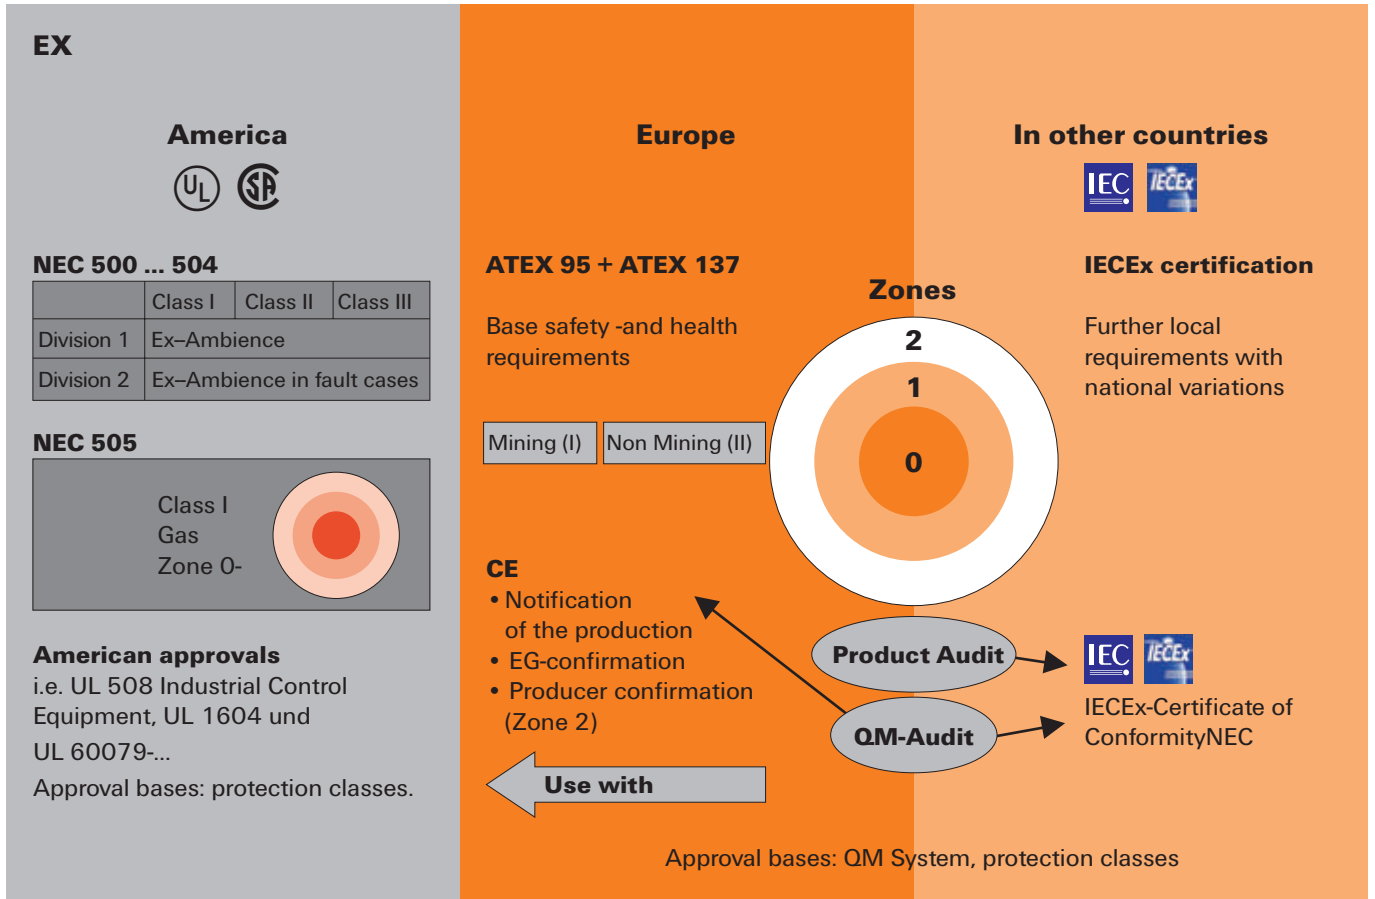

A brief overview of regulations used throughout the world and their basic content.

W

The European ATEX Regulation applies to facilities and their usage in hazardous areas.

The term "ATEX" derives from the French phrase "Atmospheres Explosive". The regulation currently includes two directives from the European Union concerning explosion protection. These are the ATEX operational directive 1999/92/EG (ATEX 137) and the ATEX product directive 94/9/EG (ATEX 95). The ATEX 137 operational directive specifies the minimum requirements for improving the protection of health and security of workers in environments at risk of explosions. The ATEX 95 product directive specifies the rules for introducing products on the market that will be used in zones where there is risk of explosion. This directive is the first to include non-electric devices within its jurisdiction.


The purpose of the directive is to protect personnel who work in hazardous areas. Appendix II of the directive contains the basic health and safety requirements. These must be followed by the manufacturer and compliance must be proven by declarations of conformity. Since June 30, 2003, all devices, components and protective systems brought to the market must be in compliance with the ATEX 95 product directive.

The ATEX 95 directive classifies devices and components for the Ex zone into two main groups:

Group I


=> Devices for use in mining, for underground and above-ground operations

- Coal dust
- Methane
- Harsh operating conditions



Group II

=> Devices for use in the other hazardous areas

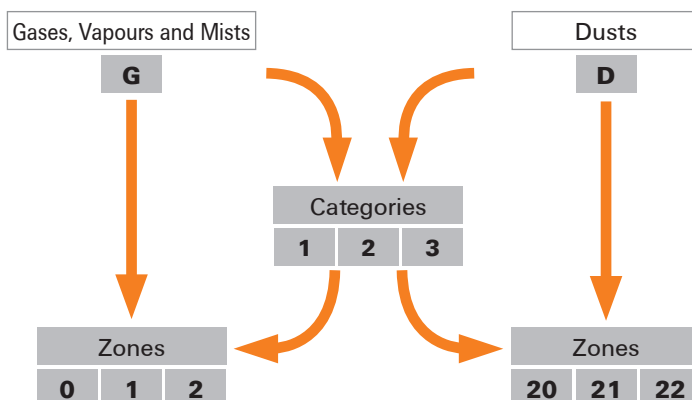

For applications in the oil, gas and chemical industries, it is particularly important to follow the Group-II "G" requirements concerning electrical or electronic devices and components.




Safety in hazardous areas

Group II "G" divides the Ex zone into three zones with different safety requirements.

- Zone 0** This zone applies to dangerous explosive atmospheres where the risk is present often or over long time periods.
 => > 50 % of the operational time, or more than 1.000 hours per year.
- Zone 1** This zone applies to situation where explosive atmospheres may occasionally be present during normal operations.
 => Occasionally, less than 10 hours per year.
- Zone 2** This zone applies to situation where explosive atmospheres are normally not present or only briefly present during normal operations.
 => Max. 30 min/year.

Hazardous areas

| | Zone 0 | Zone 1 | Zone 2 | Safe zone |
|----------------|-----------------------------|-----------------------|--------------|-----------------------------|
| Explosion risk | Continual, long-term, often | Occasionally | Rarely | None |
| Spark source | None | Rarely and short-term | Occasionally | Continual, long-term, often |

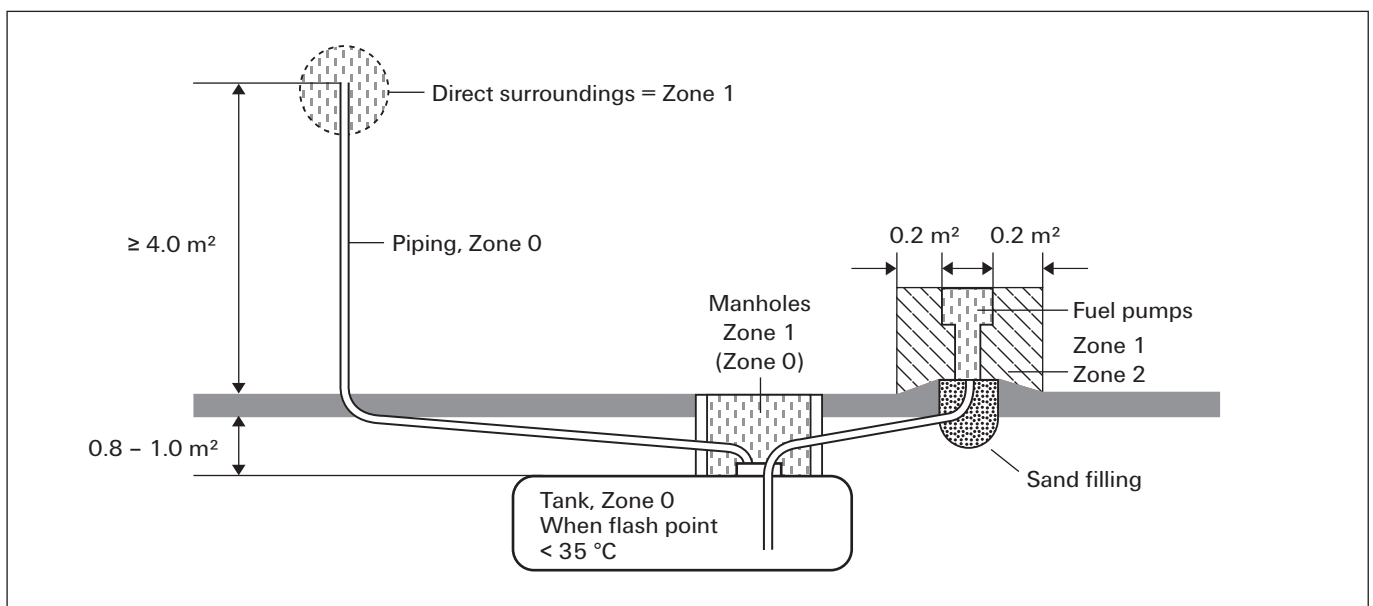

Typical division of zones at a fuelling station

In which operations are ATEX-certified electronic devices (such as signal converters, isolation amplifier, Namur switches and switching amplifiers) used?

ATEX-certified devices are used within industrial facilities and production halls where there is the possibility that explosive gases or dusts may be released.

Transportation and production applications which require the use of such certified devices are listed below:

- Off-shore oil and gas drilling
- Tanker ships which carry oil, gas or chemicals
- Ships which carry potentially explosive materials
- Refineries and other oil or gas production plants
- Transportation and filling stations for oil and gas
- Petro-chemicals

What are the differences between standard devices and intrinsically safe devices?

For electronic devices that are being used in Zone 0(20) or 1(21), none of the components or electrical circuitry are permitted to generate unallowable high temperatures or sparks, whether during normal operations or during malfunctions. In other words: "All of the circuits in intrinsically safe electrical devices (Ex i) are safe and are not capable of igniting explosive atmospheres".

What is the device category?

The device Group II (hazardous areas not including underground or above-ground mining operations) is divided into device categories 1, 2 and 3. They have the following safety levels:

| Surroundings | Device category | Occurrence and duration of explosive atmosphere | Ignitable materials | Safety levels Permitted errors | Groups and zones Comparison |
|--------------|-----------------|---|----------------------------|---|--|
| Group II | 1 | Constantly occurring Long-term Regularly | Gases, vapours, mist, dust | Very high safety level 2 different protection classes or 2 independent errors | Group II Zone 0 (gas) Zone 20 (dust) |
| Group II | 2 | Occurrence probable over a limited time period | Gases, vapours, mist, dust | High safety level 1 protection class For which no more than one error may occur | Gruppe II Zone 1 (gas) Zone 21 (dust) |
| Group II | 3 | Occurrence improbable Only for short periods | Gases, vapours, mist, dust | Normal I safety level Required protective measures | Group II Zone 2 (gas) Zone 22 (dust) |

Safety in hazardous areas

Which explosion protection categories are most commonly used?

- **Pressure-resistant encapsulation (Ex d) in compliance with EN60079-1:**

Components that are capable of triggering an explosion are enclosed in a housing that is capable of withstanding the explosion. Openings in the housing are designed to prevent the explosion from being transmitted externally.

- **Increased safety (Ex e) in compliance with EN60079-1:**

This explosion protection category is normally applied to transformers, motors, batteries, terminal blocks, electrical lines and cables. It is not suitable for the protection of electronic components and spark-generating components (such as switches, relays or surge protection). Additional measures and an increased safety level are implemented in order to prevent any sparks, electrical arcing or unallowable high temperatures which could trigger ignitions. Increased safety is made possible by housing that prevents dusts from penetrating within.

- **Explosion protection methods (Ex n):**

This explosion protection category may only be used in the hazardous areas 2/22. Here there is no danger of an explosion from the electrical equipment during normal operations or during defined malfunctions. This includes all electrical devices and components that have no spark-forming contacts and that have a water-proof or dust-proof housing. Larger creepage and clearance distances are not required as long as the maximum rated voltage of 60 V AC / 70 V DC is maintained.

- **Intrinsic safety (Ex i) in compliance with EN60079-11:**

Power supply to electrical equipment is carried out through a safety barrier which functions to limit the current and voltage so that the minimum power and temperature levels for creating an explosive mixture are not reached. Intrinsic safety for electrical and electronic devices is specified so that their circulating or stored power (even in event of malfunction) is never strong enough to trigger an explosion in an explosive atmosphere. You must also remember that not only the electrical device but also all other components connected to the circuit may be exposed to the explosive atmosphere. All switching circuits in intrinsically safe devices must be designed so that they are also intrinsically safe.

These devices are divided into the category groups <ia> and <ib> which differ in the number of occurring malfunctions.

Category <ia>

=> Switching circuits within category <ia> electrical devices must not be able to cause a spark even if two independent malfunctions take place.

Category <ib>

=> Switching circuits in electrical devices must not be able to cause a spark when a malfunction.

Electrical devices for use in explosive gas, vapour and mist atmospheres – in accordance with CENELEC

| Explosion protection type | Identification | Protective design |
|----------------------------------|----------------|--|
| Pressure-resistant encapsulation | Ex d | Encloses the explosion and prevents fire from spreading |
| Increased safety | Ex e | No spark formation or hot surfaces |
| Method of explosion protection | Ex n | No spark formation or hot surfaces |
| Intrinsic safety | Ex i | Limited energy for preventing spark formation or overheated surface temperatures |


CENELEC classification of gases, dusts and the maximum permitted surface temperatures of devices and components

| Gas group | Temperature classes | | | | | |
|-----------|-------------------------------|--------------------------|------------------------------------|--------------|----|--------------|
| | T1 | T2 | T3 | T4 | T5 | T6 |
| I | Methane | - | - | - | - | - |
| IIA | Ammonia | Ethyl alcohol | Benzene, Kerosene | Acetaldehyde | - | - |
| | Methane | Cyclohexane | | | | |
| | Ethane | n-Butane | | | | |
| | Propane | n-Hexane | | | | |
| IIB | Lighting gases, Acrylonitrile | Ethylene, Ethylene oxide | Ethylene glycol, Hydrogen sulphide | Ethyl ether | - | - |
| | IIC | Hydrogen | Ethine (Acetylen) | - | - | Hydrocarbons |

| IEC (group II) Classification | Max. surface temperature | Comment |
|----------------------------------|------------------------------------|--|
| T1 | 450 °C (842 °F) | The temperature is relevant to all parts of the devices that can come into contact with potentially explosive materials. |
| T2 | 300 °C (572 °F) | |
| T3 | 200 °C (392 °F) | |
| T4 | 135 °C (275 °F) | |
| T5 | 100 °C (212 °F) | |
| T6 | 85 °C (185 °F) | |
| Tx | Max. surface temperature undefined | Valid for the closed tank systems used on container ships where the individual contents cannot be monitored in event of a fire. It is the responsibility of the operator to assess each temperature class. |

What labelling is considered proper?

An example of device labelling:

| CE 0539 |  | II | 2 | G | Ex ia | IIA | T4 |
|--------------------------------------|---|---------------------------|---------------------------|-----|--|-----------|---------------------------------------|
| ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| Certification authority ex. DEMKO | European Commission mark for Ex devices | Device group "Surface" | Device category zone 1 | Gas | Protection explosion type: intrinsically safe category <ia> | Gas group | Surface temperature: max 135 °C |

ATEX directives

Since July 1, 2003, all new facilities in hazardous areas must be certified according to ATEX Directive 94/9/EG or ATEX 95 (ATEX: ATmosphère EXplosive = explosive atmosphere). This directive is one of the “New-Approach” directives. It is valid in all European Union countries, as well as Iceland, Lichtenstein and Norway. In these countries, the directive refers to the sale and commissioning of products which have been designed particularly for high explosion risk environments (where explosive atmospheres exist due to gases, vapours, mists, or dusts). It now also covers the mining sector and purely mechanical devices.

Class of protection

| Type of protection | Code | CENELEC EN | IEC | Product category explosion protect. |
|-----------------------|------|------------|----------|-------------------------------------|
| General requirements | - | 60079-0 | 60079-0 | - |
| Oil immersion | o | 60079-6 | 60079-6 | 2 |
| Pressurised apparatus | p | 60079-2 | 60079-2 | 2 |
| Powder filling | q | 60079-5 | 60079-5 | 2 |
| Flameproof enclosure | d | 60079-1 | 60079-1 | 2 |
| Increased safety | e | 60079-7 | 60079-7 | 2 |
| Intrinsic safety | ia | 60079-11 | 60079-11 | 1 |
| Intrinsic safety | ib | 60079-11 | 60079-11 | 2 |
| Intrinsic safety | ic | 60079-11 | 60079-11 | 3 |
| Typ n (Ex n) | n | 60079-15 | 60079-15 | 3 |
| Encapsulation | m | 60079-18 | 60079-18 | 2 |

Classification for potentially hazardous areas

| CENELEC classification IEC60079-10 | Presence of potentially explosive atmosphere | Product-category | US classification NEC 500 | Combustible media |
|------------------------------------|--|------------------|---------------------------|-------------------|
| Zone 0 | permanent, long-term | 1G | Class I, Div 1 | gases, vapours |
| Zone 20 | or frequently | 1D | Class II, Div 1 | dust |
| Zone 1 | occasionally | 2G | Class I, Div 1 | gases, vapours |
| Zone 20 | | 2D | Class II, Div 1 | dust |
| Zone 2 | rarely and | 3G | Class I, Div 2 | gases, vapours |
| Zone 22 | briefly | 3D | Class II, Div 2 | dust |

Explosion groups

| Gas (e.g.) | CENELEC | NEC 500 |
|------------------|---------|---------------|
| Propane | IIA | D |
| Ethylene | IIB | C |
| Hydrogen | IIC | B |
| Acetylene | IIC | A |
| Methane (mining) | I | mining (MSHA) |

Temperature classes

| Max. surface temperatur (°C) | Temperature class CENELEC | Temperature class NEC 500-3 |
|------------------------------|---------------------------|-----------------------------|
| 450 | T1 | T1 |
| 300 | T2 | T2 |
| 280 | - | T2A |
| 260 | - | T2B |
| 230 | - | T2C |
| 215 | - | T2D |
| 200 | T3 | T3 |
| 180 | - | T3A |
| 165 | - | T3B |
| 160 | - | T3C |
| 135 | T4 | T4 |
| 120 | - | T4A |
| 100 | T5 | T5 |
| 85 | T6 | T6 |

Labelling for ATEX approval of a signal converter

II 3 G Ex nAnCnL IIC T4

- II** = Device group 2: devices for use in hazardous areas (except for mines and above-ground mining facilities that are exposed to flammable dusts or methane)
- 3** = Device category 3: the danger occurs rarely or only for short periods. The requirement is for normal security, suitable for use in zone 2.
- G** = Intended for the gas zone
- Ex** = Explosion protection
- nA** = Non-sparking equipment
- nC** = Enclosed facility (suitable protection)
- nL** = Equipment with limited power
- IIC** = Explosion groups: typical gas for C is hydrogen
- T4** = Temperature class: The max. permitted surface temperature for T4 is 135 °C

Zone 2 a zone for which, during normal operations, there is at most, only a short-term occurrence of dangerous hazardous atmospheres (mixtures of air and flammables gases, vapours or mists).

II (1) G [Ex ia] IIC/IIB/IIA

- II** = Device group 2: devices for use in hazardous areas (except for mines and above-ground mining facilities that are exposed to flammable dusts or methane)
- (1)** = Device category (1): Equipment from category 1 can be connected to this signal converter. The signal converter must be operated in the safe zone or in zone 2 (II 3 G ...).
- G** = Intended for the gas zone.
- [Ex ia]** = Explosion protection type: protected with intrinsic safety. This signal converter, as accompanying equipment, is intended to be used for the connection of intrinsically safe circuits.
- IIC/IIB/IIA** = Explosion groups – typical gases: propane for A, Ethylene for B, and hydrogen for C.

II (1) D [Ex iaD]

- II** = Device group 2: devices for use in hazardous areas (except for mines and above-ground mining facilities that are exposed to flammable dusts or methane)
- (1)** = Device category (1): Equipment from category 1 can be connected to this signal converter. The signal converter must be operated in the safe zone or in zone 2 (II 3 G ...).
- D** = Designed for the dust zone.
- [Ex iaD]** = Explosion protection type: protected with intrinsic safety. This signal converter, as accompanying equipment, is intended to be used for the connection of intrinsically safe circuits.



Design of clearance and creepage distances in electrical equipment – influencing factors

Rated impulse withstand voltage

The rated impulse withstand voltage is derived from:

- **Voltage conductor – earth**
(the rated voltage of the network, taking into account all networks)
- **Surge category**

Table 1: Rated impulse withstand voltages for electrical equipment

| Rated voltage of power supplies system *) in V | | Rated impulse withstand voltage in kV | | | |
|--|---|---|--|---|--|
| Three-phase systems | Single-phase systems with neutral point | Electrical equipment at the supplies point of the installation (Surge category IV) | Electrical equipment as part of the permanent installation (Surge category III) | Electrical equipment to be connected to the permanent installation (Surge category II) | Specially protected electrical equipment (Surge category I) |
| | 120 to 240 | 4.00 | 2.50 | 1.50 | 0.80 |
| 230/400 | | | | | |
| 277/480 | | 6.00 | 4.00 | 2.50 | 1.50 |
| 400/690 | | 8.00 | 6.00 | 4.00 | 2.50 |
| 1000 | | Values depend on the particular project of, if no values are available, the values of the preceding line apply. | | | |

*) to IEC 38

Surge categories

are stipulated in accordance with the German standard DIN VDE 0110-1 (for electrical equipment fed directly from the low-voltage network).

Surge category I

- Equipment that is intended to be connected to the permanent electrical installation of a building. Measures to limit transient surges to the specific level are taken outside the equipment, either in the permanent installation or between the permanent installation and the equipment.

Surge category II

- Equipment to be connected to the permanent electrical installation of a building, e.g. household appliances, portable tools, etc.

Surge category III

- Equipment that is part of the permanent electrical installation and other equipment where a higher degree of availability is expected, e.g. distribution boards, circuit-breakers, wiring systems (including cables, busbars, junction boxes, switches, power sockets) in the permanent installation, and equipment for industrial use and some other equipment, e.g. stationary motors with permanent connections to the permanent installation.

Surge category IV

- Equipment for use at or near the power supplies in the electrical installations of buildings, between the principal distribution and the mains, e.g. electricity meters, circuit-breakers and centralised ripple controllers.

Pollution severity categories

Pollution severity category 1

- No pollution, or only dry, non-conductive pollution that has no influence.

Pollution severity category 2

- Non-conductive pollution only; occasional condensation may cause temporary conductivity.

Pollution severity category 3

- Conductive pollution, or dry, non-conductive pollution that is liable to be rendered conductive through condensation.

Pollution severity category 4

- Contamination results in constant conductivity, e.g. caused by conductive dust, rain or snow.

Unless explicitly stated otherwise, the measurement of clearance and creepage distances and the resulting rating data for electromechanical components is based on pollution severity 2 and surge category III, taking account of all network types.

Derating curve (current-carrying capacity curve)

The **derating curve** shows which currents may flow continuously and simultaneously via all possible connections when the component is subjected to various ambient temperatures below its upper limit temperature.


The **upper limit temperature** of a component is the rated value determined by the materials used. The total of the ambient temperature plus the temperature rise caused by the current load (power loss at volume resistance) may not exceed the upper limit temperature of the component, otherwise it will be damaged or even completely ruined.

The current-carrying capacity is hence not a constant value, but rather decreases as the component ambient temperature increases. Furthermore, the current-carrying capacity is influenced by the geometry of the component, the number of poles and the conductor(s) connected to it.

The current-carrying capacity is determined empirically according to DIN IEC 60512-3. To do this, the resulting component temperatures t_{b1} , t_{b2} and the ambient temperatures t_{u1} , t_{u2} are measured for three different currents I_1 , I_2 .

The values are entered on a graph with a system of linear coordinates to illustrate the relationships between the currents, the ambient temperatures and the temperature rise in the component.

Base curve

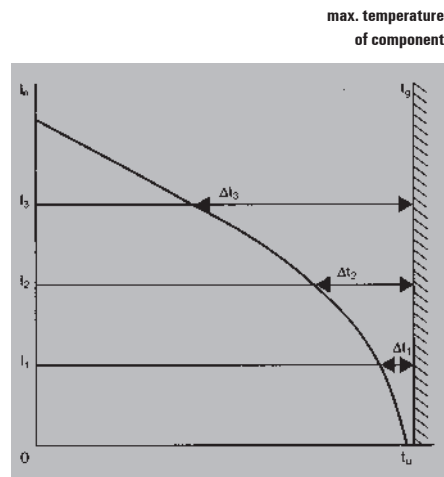

t_g = maximum temperature of component
 t_u = ambient temperature
 I_n = current

The **loading currents** are plotted on the y-axis, the **component ambient temperatures** on the x-axis.


A line drawn perpendicular to the x-axis at the upper limit temperature t_g of the component completes the system of coordinates.

The associated average values of the temperature rise in the component, $\Delta t_1 = t_{b1} - t_{u1}$, $\Delta t_2 = t_{b2} - t_{u2}$, are plotted for every current I_1 , I_2 to the left of the perpendicular line.

The points generated in this way are joined to form a roughly parabolic curve.

As it is practically impossible to choose components with the maximum permissible volume resistances for the measurements, the base curve must be reduced.

Derating curve

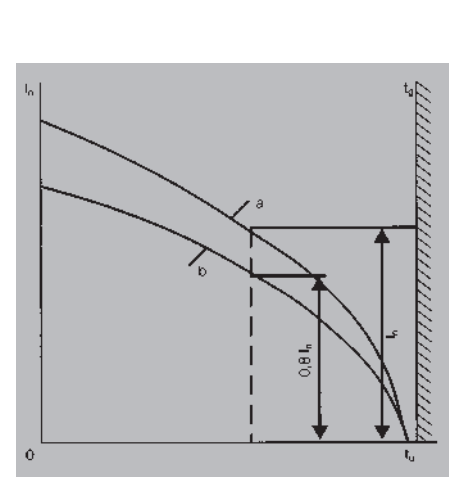

t_g = maximum temperature of component
 t_u = ambient temperature
 I_n = current
 a = base curve
 b = reduced base curve (derating curve)








Reducing the currents to 80 % results in the **"derating curve"** in which the maximum permissible volume resistances and the measuring uncertainties in the temperature measurements are taken into account in such a way that they are suitable for practical applications, as experience has shown. If the derating curve exceeds the currents in the low ambient temperature zone, which is given by the current-carrying capacity of the conductor cross-sections to be connected, then the derating curve should be limited to the smaller current in this zone.

IP class of protection to DIN EN 60529










The class of protection is indicated by a code consisting of the two letters IP and two digits representing the class of protection.

Example: **IP 65**
 | |
 2nd digit: protection from liquids
 1st digit: protection from solid bod

Protection against intrusion of external particle matter (1st digit)

| Digit | | |
|-------|---|--|
| 0 |  | No protection |
| 1 |  | Protection against ingress of large solid bodies with diameter > 50 mm. (Protection to prevent dangerous parts being touched with the back of the hand.) |
| 2 |  | Protection against ingress of large solid bodies with diameter > 12.5 mm. (Protection to prevent dangerous parts being touched with the fingers.) |
| 3 |  | Protection against ingress of large solid bodies with diameter > 2.5 mm. (Protection to prevent dangerous parts being touched with a tool.) |
| 4 |  | Protection against ingress of large solid bodies with diameter > 1 mm. (Protection to prevent dangerous parts being touched with a piece of wire.) |
| 5 |  | Protection against harmful deposits of dust, which cannot enter in an amount sufficient to interfere with satisfactory operation. |
| 6 |  | Complete protection against ingress of dust. |

Protection against penetration of liquids (2nd digit)

| Digit | | |
|-------|--|--|
| 0 |  | No protection |
| 1 |  | Protection against drops of condensed water falling vertically. |
| 2 |  | Protection against drops of liquid falling at an angle of 15° with respect to the vertical. |
| 3 |  | Protection against drops of liquid falling at an angle of 60° with respect to the vertical. |
| 4 |  | Protection against liquids splashed from any direction. |
| 5 |  | Protection against water jets projected by a nozzle from any direction. |
| 6 |  | Protection against water from heavy sea on ships' decks. |
| 7 |  | Protection against immersion in water under defined conditions of pressure and time. |
| 8 |  | Protection against indefinite immersion in water under defined conditions of pressure (which must be agreed between manufacturer and user and must be more adverse than number 7). |

Glossary

1-9

| | |
|------------------------|--|
| 2-way isolation | The input and output signals are separated electrically from each other and decoupled. Potential differences caused by long wire lengths and common reference points are eliminated. |
| 3-way isolation | Also decouples the power supply to the input and output circuit and enables supply with only one operating voltage. |

A

| | |
|----------------------------|---|
| A/D converter | Converts standardised analogue current and voltage signals into an 8-bit, 12-bit or 16-bit digital signal. It may be necessary to convert analogue signals into digital signals when you need the analogue signal from the surroundings to work with the typical digital processing requirements of process monitoring. |
| AC | Alternating current |
| Accuracy | Describes the ability of an analogue signal isolating converter to transmit a measured value as precisely as possible. It is specified in the percent deviation from the measuring range end value at room temperature. |
| Active sensor | In an active sensor, an electrical signal is generated from the measurement itself, for example dynamometric or piezo-electric. Thus no auxiliary power source is required. Because of their physical operating principals (since energy cannot be sent during the static and quasi-static states), only a change in the measured variable can be detected. |
| Actuator | The actuator is a sensor counterpart – it converts electrical current into another form of energy. |
| Alarm contact | A switching contact that activates when a disturbance occurs (for example, an overload or short circuit). |
| Ambient temperature | DIN EN 60204-1 uses this term to refer to the temperature of the surrounding air or medium at which the equipment can be properly and safely operated. This is a part of the surrounding physical and operational conditions. Failure to maintain this temperature level can invalidate the product warranty. |
| Analogue signal | A signal is designated as an analogue signal if it transmits parameter information that is infinitely variable between a minimum and maximum value (this includes instantaneous values such as current, voltage or temperature). This applies to practically all real-world processes or states. It is theoretically possible to register any small signal changes (there is a very large dynamic range). |

| | |
|-------------|--|
| ATEX | <p>The ATEX directive from 23.4.1994 is valid within the EU and the EFTA Western European nations. It applies to devices, machinery components, controllers and protective systems that are to be used in hazardous areas. This directive harmonises the different national regulations from the EU member nations concerning the proper and intended use of machines and facilities in hazardous areas.</p> <p>ATEX is derived from the phrase "ATmosphere EXplosive". It stipulates that operators should prevent explosions and ensure protection.</p> <p>Regarding explosion protection in a potentially explosive atmosphere, the ATEX directive 94/9/EC has precedence over machinery directives and must be followed. The directive describes the following steps:</p> <ul style="list-style-type: none"> • Describe how often a potentially explosive atmosphere occurs and where it occurs. • These areas are then divided into zones according to the specifications. • Make sure that only properly categorised equipment is present within each different zone. As soon as an area is classified as being dangerous, steps must be taken to limit the potential ignition sources that are present there. |
|-------------|--|


C

| | |
|-----------------------------------|---|
| Calibration device | A special instrument used for the calibration and configuration of analogue signal conditioning devices. The calibration device produces highly precise standardised signals. It is equipped with a load indicator for quick loop diagnostics. |
| CE | Abbreviation for C ommunauté E uropéenne (the European Community). Manufacturers use the CE label to confirm that their products comply with the corresponding EC directives and the "essential requirements" therein. |
| Cold-junction compensation | Thermocouples require a temperature reference point to compensate for unwanted "cold junctions". The usual method for achieving this is by measuring the temperature at the reference junction with a temperature sensor that can be read immediately. The interfering voltage can then be compensated for in the measurement results. This process is referred to as cold-junction compensation (CJC). |
| Common-mode interference | Interfering currents and voltages that can occur on the connecting cables between electrical devices and facility components. These can then spread with similar phase and current direction to the feed line and the return line. |
| Counter | A counter can be used for measuring flow or for counting events. Analogue or digital input signals (pulses) may also be processed. Integrated functions such as linearisation, interference suppression, hysteresis configuration and reference values expand the range of use of a counter. Switching contacts are available on the output side for monitoring threshold. |

W

Creepage and clearance distances

The safety gaps between two current-carrying wires. The creepage distance is the shortest path along an insulating surface between two live components. The clearance distance is the shortest path in the air between two points of reference.

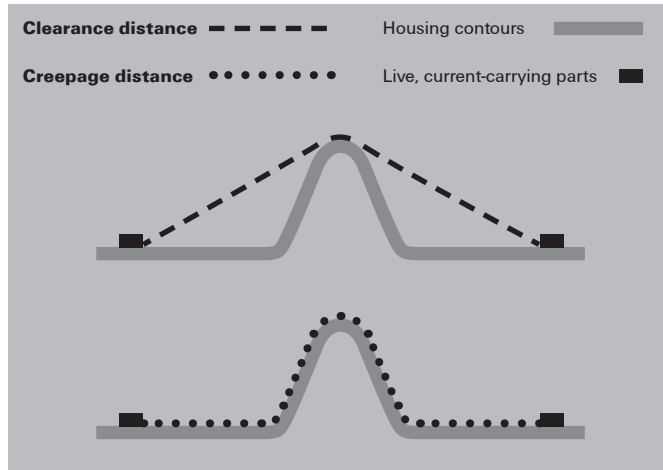

D

D/A converter


D/A converters convert standardised digital signals (for example, with an 8-bit structure) into analogue current and voltage signals. It may be necessary to convert digital signals into analogue signals when you need the analogue signal from the surroundings to work with the typical digital processing requirements of process monitoring.

DC

Direct current

Derating

The continuous current level reduction in relation to an ambient temperature increase, represented as a derating curve (a load reduction curve).

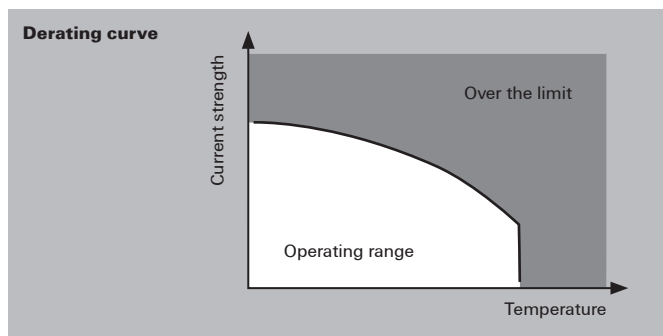

| | |
|--------------------------|--|
| Device categories | The device category determines which equipment can be used in which zone. There are six device categories. The categories 1 G, 2 G and 3 G are classifications for gas explosion protection (G = Gas). Equipment with 1 G is suitable for zones 0, 1 and 2. Equipment with 2 G is suitable for zones 1 and 2. Equipment with 3 G is suitable for zone 2. The categories 1 D, 2 D and 3 D are classifications for dust explosion protection (D = Dust). Equipment with 1 D is suitable for zones 20, 21 and 22. Equipment with 2 D is suitable for zones 21 and 22. Equipment with 3 D is suitable for zone 22. |
| Device groups | Equipment is divided into groups I and II. Group I concerns underground mining while group II concerns explosion protection for gas and dust in all other applications. |
| DTM | DTMs (D evice T ype M anager) are software drivers that are vendor- and device-neutral. DTMs define functions for access to device parameters, troubleshooting, configuration and operation of devices The DTM specifies all device-specific information, functions and rules (such as the device structure, communication capabilities, internal dependencies and the human-machine interface (HMI)). Device manufacturers make available a Device Type Manager (DTM) software driver for each device or device group. |

E

| | |
|-----------------------|--|
| EIA-232/ RS232 | The term EIA-232 (originally RS232) refers to a serial interface standard developed by a U.S. standards committee (now known as the EIA – Electronic Industries Alliance) in the early 1960s. EIA-232 specifies the connection between the data terminal equipment (DTE) and the modem (data communication equipment or DCE). It defines timing, voltage level, plug and protocol details. EIA-232 defines a voltage interface. The information bits are encoded using electrical voltage. The data lines (TxD and RxD) use a negative logic whereby a voltage level between -3 V and -15 V (ANSI/EIA/TIA-232-F-1997) represents a logical one and a voltage level between +3 V and +15 V represents a logical zero. Signal levels between -3 V and +3 V are undefined. |
| EIA-422/ RS422 | EIA-422 (also known as RS422) is an interface standard for cable-based differential, serial data transmission. In contrast to the asymmetric serial interface specified by the EIA-232 standard, the EIA-422 interface is designed for symmetric transmissions. This means that two sets of twisted pair wires are required to carry the positive and negative signals from the sender to the receiver. This minimises common-mode interferences and also increases the data rates in comparison to the asymmetric EIA-232 interface. EIA-422 can be used to establish a full-duplex, point-to-point connection. Multi-drop networks with one sender and up to ten receivers are also possible. The sender and receiver in multi-drop networks can only be operated in half-duplex (in one direction). Because of the high data rate (up to several MBit/s), a wire pair on the EIA-422 interface must be terminated with a terminating resistor (normally 120 ohm). |

| | |
|-----------------------------------|--|
| EIA-485/ RS485 | EIA-485, also referred to as RS485, is an interface standard for digital, cable-based, differential, serial data transmissions. EIA-485 uses a wire pair for transmitting inverted and non-inverted levels for a single-bit data signal. The original data signal is reconstructed by the receiver as the difference between the two voltage levels. This has the advantage of increasing the resistance to interference, since common-mode interference then has no effect on the transmission. The EIA-485 interface operates with a voltage differential of +/-200 mV, so that the voltage interface has a differential related to half of the operational voltage. It normally uses a single wire pair and is operated in half-duplex. However full-duplex operations are possible with two wire pairs. This connection has multi-point capabilities; up to 32 nodes can be connected to an EIA-485 bus. Standard cable lengths run up to 1.2 km in length and support transmission speeds up to 10 MBit/s. The wire pairs must be terminated with resistors (typically 120 Ohm) because of the cable length and high data rates. |
| Electrical equipment | All of the electrical and electronic components and circuits within an enclosure. |
| Explosion groups | Depending on the ignition protection, explosion-protected equipment intended for gases, vapours and mists are divided into three explosion groups (IIA-IIB-IIC). The explosion group provides a measure of the explosive break-through capability of gases (in an explosive atmosphere). The requirements for the equipment increase in strictness from II A to II C. |
| Explosion protection types | <p>The ignition protection type is a term used in explosion protection that refers to the various types of protective construction designed into the product. Ignition protection types are formulated to minimise the risk that an ignition source will be present in an explosive atmosphere.</p> <p>The following ignition protection types are specified:</p> <ul style="list-style-type: none"> • For electrical equipment in a gas <ul style="list-style-type: none"> • Intrinsic safety Ex i • Pressure-resistant Ex d encapsulation • Increased safety Ex e • Pressurization encapsulation Ex p • Oil immersion Ex o • Moulded encapsulation Ex m • Sand encapsulation Ex q • Ignition protection type for zone 2 Ex n • Special ignition protection type Ex s • For electrical equipment in dust <ul style="list-style-type: none"> • Pressurization encapsulation Ex pD • Intrinsic safety Ex iD • Moulded encapsulation Ex mD • Protection provided by housing Ex s tD |

| | |
|------------------------------|---|
| Explosive atmospheres | This is defined as a mixture of flammable materials and oxygen. An ignition leads to a explosive burning process throughout the entire mixture. Usually the oxygen is supplied by the surrounding air. Flammable materials may be gases, liquids, vapours, mists or dusts. Explosion protection considers this to be normal atmospheric conditions. The explosiveness of the mixture depends of the flammability of the materials and the concentration of air or oxygen. |
|------------------------------|---|

F


| | |
|----------------------------|---|
| Flammability rating | Flammability class specification according to the American UL 94 specification. Duration of burning, annealing time and the burning drop formation are all taken into account. The highest category is V-0. |
| Frequency converter | Converts frequencies into analogue signals (or vice versa). In-line control systems can then directly process pulse strings from speed or rotational measurements. |

G

| | |
|---------------------------|---|
| Galvanic isolation | Potential-free isolation between electrical components. Normally, the inputs circuit, output circuit and power supply are designed so that they are electrically isolated from each other. The isolation can be achieved using optical means (an optocoupler) or by using a transformer. The electrical isolation of measurement signals ensures that the differences in earth potentials and common-mode interference are suppressed |
| GOST-R | The Russian certification for products, materials and technical facilities. |

H

| | |
|--|---|
| Hall sensor current measurement | Hall sensors can measure the magnetic field of a conducting wire. They then generate a proportional voltage on the measurement output (the Hall voltage). This can be converted to a standardised signal by means of an amplifier circuit. Such a measurement is well suited for measuring high DC and AC currents with frequencies up to 1 kHz. Start-up currents and current peaks cannot damage a Hall sensor. |
|--|---|
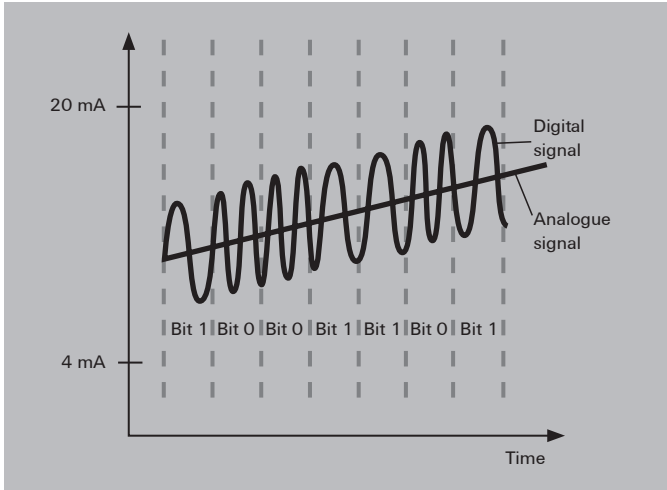
| | |
|---|--|
| <p>HART®</p> | <p>HART® (Highway Addressable Remote Transducer) is a communications protocol for bus-addressed field devices used in process automation. In HART®-based communications, field devices and controllers are connected together over 4–20 mA current loops. This analogue signal is superimposed with a digital signal by using the FSK process (Frequency Shift Keying). The process allows additional measurements, configuration and device data to be transmitted without influencing the analogue signal. Ex isolators can also be used in hazardous areas.</p>  |
| <p>Hazardous area</p> | <p>According to the ATEX directive, an hazardous area is where the extent of the explosive atmosphere mandates that extra measures must be taken to safeguard health and protect surrounding machinery. Hazardous areas are classified according to the frequency and duration of the occurrence of the explosive atmosphere (refer to the sub-divided zones).</p> |
| <p>Hysteresis</p> | <p>Specifies the percent difference between the switch-on and switch-off points of a switching contact. The hysteresis must not fall below a minimal value. Otherwise it would no longer be possible to carry out specific switching during the monitoring of threshold.</p> |
| <p>I</p> | |
| <p>IECEx</p> | <p>An international directive regarding the creation of declarations of conformity by the manufacturers of facilities, devices and components that are intended for use in explosion risk zones. This directive is valid throughout the globe but is only currently used in some Asian nations.</p> |
| <p>Impulse withstand voltage</p> | <p>The high pulse voltage of a specified form and polarity that does not lead to an insulation breakthrough or flashover, under the specific conditions defined in EN 60664-1.</p> |

| | |
|--|--|
| Initiator PNP/NPN switched | Two wires in a three-wire sensor are responsible for keeping the supply activated. The third connecting wire is used for transferring commands (NO/NC contact). Initiators with NPN outputs switch the load in active mode towards the minus potential. Proximity switches with PNP outputs switch toward the plus potential. |
| Insulation voltage | For electronics components with electrical isolation, this is the maximum AC test voltage that can be applied for a specified time interval (5 s / 60 s) without causing a break-through. |
| Intrinsic safety "i" | Electrical equipment for hazardous areas with the ignition protection type "Intrinsic safety Ex i" Intrinsic safety is divided into ignition protection types "ia" or "ib" The ignition protection type "intrinsic safety" is a protective strategy that requires a complex analysis of electronic devices. So it is not only important to protect intrinsically safe current from the other unsafe circuits. It is also important to limit the open-circuit voltage, short-circuit current, power, stored energy and the surface temperature of components that will be exposed to the explosive atmosphere. Intrinsically safe circuits are circuits where a spark or thermal effect (as may occur under the testing conditions specified by EN 60079-11) is not capable of igniting an explosive atmosphere (of sub-groups IIA, IIB or IIC) or a dust-air mixture. The testing conditions cover normal operations and certain error conditions as specified in the standard. |
| IP protection classes | Equipment is assigned an IP protection class to indicate which environmental conditions it can be used in. |
| Isolation amplifier (active isolator) | An isolation amplifier is used to provide electrical isolation for analogue standard signals. They are designed with 2-way or 3-way isolation. The isolation of the potentials eliminates interference on the measurement signal that can be caused by earth loops or common-mode noise. The active isolator makes use of a separate voltage source for its power supply. It functions without feedback; a change on the output side load does not influence the input circuit. |

L

| | |
|------------------------------|---|
| Leakage current | The current on the load side of an optocoupler that flows towards the output circuit while in a closed state. |
| Limiting frequency | The limiting frequency of an analogue signal isolating converter is that frequency where the output signal is reduced to $1/\sqrt{2}$ of the value of the input signal (approx. 70.7 % = -3 dB). |
| Line break monitoring | Analogue measuring transducer with wire-break detection capability that permanently monitors the input signal. In the event of a fault (a wire break), the output signal jumps up to a defined value over the nominal range so that a controller wired further down the circuit can evaluate the error. |

W

| | |
|-------------------------------|---|
| Linearisation | Temperature-dependent components normally do not have a linear characteristic curve. Their characteristic curves must be linearised so that they can be evaluated as precisely as possible. The measurement curves of thermocouples and temperature-dependent resistors (NTC/ PTC), in particular, exhibit significant deviation from an "ideal curve". In the linearisation process, the measurement signal is processed by a microprocessor and an ideal characteristic curve is generated which can then be analysed or processed further. |
| Load cell | A load cell is a special type of force sensor used in weighing systems (i.e., with scales). They are calibrated in grams (g), kilograms (kg) or tons (t). Load cells usually have a spring mechanism used as a force sensor. The spring is a specially shaped piece of metal whose shape changes slightly when under the influence of weight. This elastic deformation is recorded by strain gauges and converted into an electrical signal. Weights can be recorded ranging from a few hundred grams to several thousand tons. |
| Load resistance (load) | This is the load resistance on the output side of a measuring transducer or transmitter. For analogue current outputs, the load is 500–600 ohms maximum. Voltage outputs normally have a load of at least 10 kOhm. |

M

| | |
|--|---|
| Measurement isolating transformer | Converts electric and non-electric input signals into standard analogue signals. At the same time it provides electrical isolation between the input and output (2-way isolation) or between the input, output and supply (3-way isolation). Measurement isolators are typically used to record temperatures (RTD, thermocouples) or for measuring current, voltage, power, frequency, resistance and conductivity. |
| Measuring bridge | Sensors based on Wheatstone bridge circuitry can capture force, pressure and torque. Relatively small length changes under 10 – 4 mm can be recorded using DMS strain gauges in the form of resistance changes. A typical application is for capturing measurements in load cells. |

N

| | |
|----------------------|--|
| Namur sensor | NAMUR-compliant sensors (The standardization commission for measuring and control technology in the German chemical industry) operate with a load-independent current. They have four modes so that an analogue evaluative unit can detect a sensor malfunction. 1) Current of 0 mA => wire break, circuit is open 2) Current of approx. 20 % of the max. value => Sensor ready, activated 3) Current of approx. 60 % of the max. value => Sensor ready, not activated 4) Current at max. value => short circuit, max. current NAMUR sensors are suited for use in hazardous areas. |
| NEC 500 – 505 | The relevant directives for the classification of explosion protection in the USA. NEC 500 regulates the standard Ex classifications (class – division – model). The NEC 505 defines the zone model based on the European and IEC classifications. |

| | |
|--|--|
| Nominal switching current – load side | The permitted load current of a relay contact or semiconductor contact when in continuous operations. |
| Nominal switching voltage – load side | The switching voltage that a relay contact or semiconductor contact uses in relation to its application. |

O

| | |
|------------------------------------|---|
| Output-current loop-powered | Output loop powered 2-wire transmitters have a 4 – 20 mA output. The transmitter is supplied with power via the current loop on the output side. A typical loop consists of a regulated DC power supply, the 2-wire transmitter and a receiving device. |
| Overvoltage category | <p>The overvoltage categories are described in DIN EN 60664-1. The category dictates the insulation clearance gaps required. Category III is the default specification (EN 50178).</p> <ul style="list-style-type: none"> • Overvoltage category I Devices that are intended to be connected to the permanent electrical building installation. The measures for limiting transient surge voltages to the proper level are taken outside of the device. The protective mechanisms can either be in the permanent installation or between the permanent installation and the device. • Overvoltage category II Devices that are intended to be connected to the permanent electrical building installation (such household appliances or portable tools). • Overvoltage category III Devices that are a part of the permanent installation and other devices where a higher degree of availability is required. This includes the distributor panels, power switches, distribution systems (including cable, busbars, distributor boxes, switches and outlets) that are part of the permanent installation, devices intended for industrial use, and devices that are continually connected to the permanent installation (such as stationary motors). • Overvoltage category IV Devices that are intended to be used on or near the power feed in a building's electrical installation – ranging from the main distribution to the mains power system. This includes electrical meters, surge protection switches and ripple control equipment. |

W

P

| | |
|---|---|
| Passive isolator/ input loop powered | <p>Generates its power supply from the input signal (0/4–20 mA). The amount of current needed internally is so small that the measurement signal is not influenced. Transformers are used to provide the isolation between the input and the output.</p> <p>The advantages include: eliminates the influence of the mains power system, highly accurate, minimal signal delay, and minimal power used. Passive isolators do not function free from feedback; so a load change on the output circuit will automatically effect the input circuit as well.</p> |
| Passive sensor | <p>Contains passive components whose parameters can be changed by the measured variables. A primary electronic mechanism converts these parameters into electric signals. An auxiliary external power source is needed for the passive sensor. Passive sensors can be used to determine both static and semi-static measured variables. For this reason, the majority of sensors have a passive construction. Examples of this type include load cells and resistance thermometers.</p> |
| Pollution severity level | <p>The pollution severity level specifies the conditions of the immediate surroundings. It is defined in DIN EN 50178, Section 5.2.15.2. The pollution (contamination) severity level should be used to determine the required creepage distance for the insulation. Pollution degree 2 is the default specification.</p> <ul style="list-style-type: none"> • Pollution severity level 1 There is no contamination or only dry occurrences of non-conductive pollution. This pollution has no influence. • Pollution severity level 2 There is only non-conductive pollution. Temporary occurrences of conductivity caused by condensation may also occur. • Pollution severity level 3 Conductive pollution or dry, non-conductive pollution that can become conductive due to condensation is likely to occur. • Pollution severity level 4 The contamination leads to continual conductivity which can be caused by such contaminants as conductive dust, rain or snow. |

R

| | |
|--------------------------|---|
| Rated voltage | <p>Specified by the insulation coordination – the rated voltage is the voltage level at which the product can be safely operated, in relation to the corresponding pollution severity level and the surge voltage category.</p> |
| Relative humidity | <p>The relationship between the actual moisture and the maximum possible quantity of water in the air. Expressed as a percentage.</p> |

| | |
|-------------------------|---|
| RoHS | The EC directive 2002/95/EC – concerning the restriction of the use of certain hazardous substances in electrical and electronic equipment – regulates the use of hazardous materials within devices and components. This directive, and its various implementations into national laws, are referred to by the abbreviation RoHS (Restriction of Hazardous Substances). |
| RTD/ PT100/ 1000 | <p>RTD sensors are temperature probes that operate based on the resistance changes which take in metal as the temperature changes. They are resistance thermometers based on PTC resistors. The electrical changes in resistance of a platinum wire or platinum film is often used for measuring temperatures ranging from -200 °C to 850 °C. The platinum temperature sensors are characterised by their nominal resistance R₀ at a temperature of 0 °C. The standard types include:</p> <ul style="list-style-type: none"> • PT100 (R₀= 100 Ohm) • PT1000 (R₀= 1 kOhm) <p>A two-wire, three-wire or four-wire electrical connection can be used to electrically connect the PT/RTD sensor to the evaluative electronics. A three-wire or four-wire method eliminates any errors caused by the inherent resistance of the sensor connecting wires.</p> <p>In the three-wire method, one end is equipped with two pigtail connectors. In the four-wire method, both ends are equipped with two pigtail connectors.</p> |

S

| | |
|-----------------------------------|--|
| Self-heating | Self-heating refers to the temperature increase in an operating device caused by the internal power loss. |
| Sensor | A sensor is a physical component capable of capturing certain physical or chemical properties (such as thermal radiation, temperature, humidity, pressure, noise, brightness or acceleration) as a measurement. It may also be able to analyse the quality of the composition of the material surroundings. These values are captured using physical or chemical phenomena and then converted into another form (usually electrical signals) so they can be post-processed. |
| Signal distributorsplitter | A signal isolator that accepts an analogue input signal and delivers at least two signals on the output side. This permits the signal to be transmitted to a PLC/DCS system and to a separate display. A signal multiplier is designed either as an active isolator with an external power feed or as an output loop powered version. |
| SIL | <p>Safety Integrity Level.</p> <p>The components must meet the requirements of IEC 61508 in order to reduce risk. This standard provides general requirements for avoiding and minimising device and equipment outages. It stipulates organization and technical requirements concerning device development and operation. Four safety levels are defined (from SIL1 for minimal risk to SIL4 for very high risk) for classifying facilities and risk-reduction measures. Risk-reduction measures must be more reliable when the classified risk level is higher.</p> |
| Status indicator | An LED that displays the operational status, such as operational (yellow), switching (green), and alarm/malfunction (red). |
| Step response time | This is the time delay in the output signal change when there is a signal jump ranging from 10 to 90 % on the input side. The step response time is inversely proportional to the limiting frequency |
| Storage temperature | The permitted ambient temperature, related to a specific relative humidity level, for which the product should be stored while in a current-free state. |

W

| | |
|----------------------------|------------------------------------|
| Switching threshold | The switch-on or switch-off point. |
|----------------------------|------------------------------------|

T


| | |
|----------------------------|---|
| Temperature classes | <p>Explosion-protected equipment that is to be installed into the Ex zone is subdivided into six temperature classes (T1 to T6).</p> <p>These temperature classes define the maximum surface temperature permitted for the equipment. The definition is based on an ambient temperature of +40 °C. This temperature may not be exceeded on any part of the equipment at any point in time. In all cases, the maximum surface temperature must be lower than the ignition temperature of the surrounding medium. The requirements placed on the equipment become stricter from class T1 to T6.</p> |
|----------------------------|---|

| | |
|--------------------------------|---|
| Temperature coefficient | <p>The temperature coefficient describes the relative change of a physical variable based on the temperature change relative to a reference temperature (room temperature). It directly influences the precision of an analogue signal converter. The coefficient is specified in ppm/K of the corresponding measuring range end value.</p> |
|--------------------------------|---|

| | |
|---------------------|---|
| Thermocouple | <p>A thermocouple is a component made of two different materials which are connected to each other at one end. An electrical voltage is created (based on the principle of the Seebeck effect) along a wire that connects the unattached ends when there is a temperature differential.</p> <p>The juncture point and the unattached ends must have different temperatures for a voltage to be generated.</p> |
|---------------------|---|

The following thermocouples are used for industrial applications:

| Thermal pair | Short name | Type | Temperature range in °C |
|--|----------------|------|-------------------------|
| Nickel/Chrome-Nickel/Al | NiCr-Ni/Al | K | -200 ... +1372 |
| Iron-constantan | Fe-CuNi | J | -200 ... +1200 |
| Copper-constantan | Cu-CuNi | T | -200 ... +400 |
| Nickel/Chrome constantan | NiCr-CuNi | E | -200 ... +1000 |
| Platinum/10 % Rhodium-Platinum | Pt10Rh-Pt | S | -50 ... +1760 |
| Platinum/13 % Rhodium-Platinum | Pt13Rh-Pt | R | -50 ... +1760 |
| Nickel/Chrome-Nickel/Magnesium | NiCr-NiMg | N | -200 ... +1300 |
| Platinum/30 % Rhodium - Platinum/6 % Rhodium | Pt30Rh - Pt6Rh | B | 0 ... +1820 |

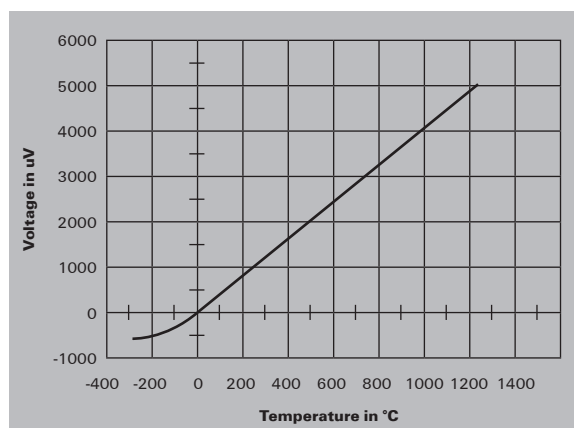

| | |
|--|--|
| Threshold monitoring | The limiting values of physical variables must be continually monitored for industrial processes. This includes fill levels, temperatures, speed, positions, weights and frequencies. Specialised threshold monitoring components are used for this purpose. The sensor signals are captured on the input side, evaluated electronically and converted. The corresponding threshold (min/max) are then made available via the digital switching outputs (relays or transistors) to the external devices. Potentiometers can be used to customise each switching point and its minimum/maximum threshold as well as the switching hysteresis. |
| Transformer-based current measurement | Signal converters with transformer coupling are used for taking cost-effective measurements of sinusoidal currents (50/60 Hz). The current being measured flows directly through the primary coil of the measurement transformer. It is then stepped down and electronically processed in the converter. |
| True RMS value | True RMS is the measure of the active component of alternating current and voltages. The root mean square (RMS) is a measure of the magnitude of varying quantities (such as alternating current and voltage). It is a constant value that relates to the power consumed by a resistive load in a specified time period. The RMS is dependent on the amplitude and the curve slope. Non-sinusoidal signals can only be measured and processed with "true RMS"-compliant devices. |
| TTY | <p>The TTY interface is a serial interface. This interface is often referred to as a 20-mA-current interface since a constant DC current of 20 mA flows through it during the idle state. In contrast to RS232, the data transmission for the asymmetric signal connection is not controlled by voltage changes but by a load-independent line current (typically 20 mA for High and 0 mA for Low). Thus there is no significant length-dependent voltage loss to take into consideration. Here the cable lengths can run up to several kilometres.</p> <p>TTY interfaces are currently used mostly where dedicated connections are required: for exchanging data between electronic scales, for large industrial displays, or for log printers.</p> |
| Type of contact | <p>A contact is called normally open (NO) or a make contact if it is open when the armature is dropped out (no current in coil) and closed when the armature is picked up (current flowing in coil). A contact is called a break contact or normally closed (NC) contact if it interrupts the circuit when the armature is picked up. A combination of NC and NO is called a changeover (CO) contact. A relay may have one or more of such contacts:</p> <p>NC – Normally Closed = break contact (11, 12: NC contact) NO – Normally Open = make contact (13, 14: NO contact) CO – Change Over contact (11, 12, 14: CO contact (11 is the shared (root) contact))</p> |

Z

Zone division

Hazardous areas are divided into zones. These divisions take into account the various risks from explosive atmospheres. The corresponding explosion protection can then be implemented economically and safely in accordance with the particular conditions of the zone. The zone definitions in the ATEX directive provide comprehensive regulations for the European Community.

IEC 60079-10 is valid for gases and vapours. A similar classification is used for facilities in the USA which are covered by the US standard NEC 505.

IEC 61241-3 covers the division into zones according to the dust level.

Explosion risk areas are classified into zones according to likelihood of explosive atmospheres occurring and their persistence:

Zone 0: this zone has an explosive atmosphere that is a mixture of air and flammable gases, vapours or mists. The mixture is present frequently or over long periods.

Zone 1: an explosive atmosphere may occasionally occur in this zone under normal operating conditions.

Zone 2: an explosive atmosphere is not likely to occur in this zone or may only occur briefly.

Zone 20: this zone has an explosive atmosphere that is a flammable mixture of air and dust. The mixture is present often or over long periods.

Zone 21: an explosive atmosphere, in the form of a flammable dust/air mixture, may occasionally occur in this zone under normal operating conditions.

Zone 22: an explosive atmosphere, in the form of a flammable dust/air mixture, is not likely to occur in this zone or may only occur briefly.

Glossary

W

W

Index

| | | |
|--------------|-----------------|-----|
| Index | Index Type | X.2 |
| | Index Order No. | X.4 |

| Type | Order No. | Page |
|-------------------------|-------------|------|
| A | | |
| ACT20C-AI-AO-MTCP | 1334490000 | D.7 |
| ACT20C-CMT-10-AO-RC-S | 1510240000 | D.12 |
| ACT20C-CMT-60-AO-RC-S | 1510420000 | D.12 |
| ACT20C-GTW-100-MTCP-S | 1510370000 | D.11 |
| ACT20C-LBT-10 | 1510340000 | D.13 |
| ACT20-FEED-IN-BASIC-S | 1282490000 | C.29 |
| ACT20-FEED-IN-BASIC-S | 1282490000 | G.9 |
| ACT20-FEED-IN-PRO-S | 8965500000 | C.29 |
| ACT20-FEED-IN-PRO-S | 8965500000 | G.9 |
| ACT20M-2CI-2CO-ILP-S | 1176080000 | C.18 |
| ACT20M-2CI-2CO-OLP-S | 1176050000 | C.19 |
| ACT20M-AI-2AO-S | 1176020000 | C.11 |
| ACT20M-AI-AO-E-S | 1176010000 | C.15 |
| ACT20M-AI-AO-S | 1176000000 | C.14 |
| ACT20M-BAI-2AO-S | 1375470000 | C.12 |
| ACT20M-BAI-AO-S | 1375450000 | C.16 |
| ACT20M-CI-2CO-S | 1175990000 | C.10 |
| ACT20M-CI-CO-ILP-S | 1176070000 | C.18 |
| ACT20M-CI-CO-OLP-S | 1176040000 | C.19 |
| ACT20M-CI-CO-S | 1175980000 | C.13 |
| ACT20M-RTIC-CO-OLP-S | 1435590000 | C.20 |
| ACT20M-RTI-AO-E-S | 1375520000 | C.23 |
| ACT20M-RTI-AO-S | 1375510000 | C.22 |
| ACT20M-RTI-CO-EDLP-S | 1435610000 | C.21 |
| ACT20M-TCI-AO-E-S | 1375500000 | C.25 |
| ACT20M-TCI-AO-S | 1375480000 | C.24 |
| ACT20M-UI-AO-S | 1176030000 | C.17 |
| ACT20P-2CI-2CO-12 | 7760054117 | D.18 |
| ACT20P-2CI-2CO-12 | 7760054117 | D.28 |
| ACT20P-AI-AO-DC-S | 14747420000 | D.18 |
| ACT20P-AI-AO-DC-S | 14747420000 | D.25 |
| ACT20P-BRIDGE-S | 1067250000 | D.18 |
| ACT20P-BRIDGE-S | 1067250000 | D.37 |
| ACT20P-CI-2CO | 7760054115 | D.18 |
| ACT20P-CI-2CO | 7760054115 | D.26 |
| ACT20P-CI-CD | 7760054114 | D.18 |
| ACT20P-CI-CD | 7760054114 | D.27 |
| ACT20P-CMT-10-AO-RC-S | 1510470000 | D.18 |
| ACT20P-CMT-10-AO-RC-S | 1510470000 | D.33 |
| ACT20P-CMT-30-AO-RC-S | 1510540000 | D.18 |
| ACT20P-CMT-30-AO-RC-S | 1510540000 | D.33 |
| ACT20P-CMT-60-AO-RC-S | 1510440000 | D.18 |
| ACT20P-CMT-60-AO-RC-S | 1510440000 | D.33 |
| ACT20P-CMT-60-RC-S | 1510390000 | D.33 |
| ACT20P-PRO DCDC II-S | 1481970000 | D.18 |
| ACT20P-PRO DCDC II-S | 1481970000 | D.21 |
| ACT20P-UI-2RCO-DC-S | 7940045760 | D.18 |
| ACT20P-UI-2RCO-DC-S | 7940045760 | D.31 |
| ACT20P-UI-AO-DOLP-S | 1453210000 | D.18 |
| ACT20P-UI-AO-DOLP-S | 1453210000 | D.23 |
| ACT20X-2HAI-2SAO-S | 8965440000 | B.7 |
| ACT20X-2HDI-2SDO-RNC-S | 8965380000 | B.17 |
| ACT20X-2HDI-2SDO-RNO-S | 8965370000 | B.17 |
| ACT20X-2HDI-2SDO-S | 8965390000 | B.19 |
| ACT20X-2HTI-2SAO-S | 8965480000 | B.11 |
| ACT20X-2SAI-2HAO-S | 8965460000 | B.9 |
| ACT20X-2SDI-2HDO-S | 8965420000 | B.21 |
| ACT20X-CJC-HTI-S PRT 11 | 1160840000 | G.10 |
| ACT20X-CJC-HTI-S PRT 21 | 1160650000 | G.10 |
| ACT20X-HAI-2AO-S | 8965430000 | B.7 |
| ACT20X-HDI-SDO-RNC-S | 8965350000 | B.17 |
| ACT20X-HDI-SDO-RNO-S | 8965340000 | B.17 |
| ACT20X-HDI-SDO-S | 8965360000 | B.19 |
| ACT20X-HTI-2AO-S | 8965470000 | B.11 |
| ACT20X-HUI-2AO-ILP-S | 1318220000 | B.15 |
| ACT20X-HUI-2AO-S | 8965490000 | B.13 |
| ACT20X-SAI-HAO-S | 8965450000 | B.9 |
| ACT20X-SDI-HDO-H-S | 8965410000 | B.23 |
| ACT20X-SDI-HDO-L-S | 8965400000 | B.21 |
| AMS400A 4-20mA/AO | 7940011895 | F.17 |
| AP MCZ 1.5 | 8389030000 | G.12 |

B

| | | |
|-------------------------------|------------|------|
| BHZ 5.00/02/90LH BK/BK PRT 41 | 1086040000 | G.10 |
| BHZ 5.00/02/90LH BK/BL PRT 11 | 1086250000 | G.10 |
| BHZ 5.00/02/90LH BK/BL PRT 21 | 1086260000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 11 | 1086130000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 15 | 1086190000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 21 | 1086140000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 25 | 1086200000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 31 | 1086150000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 35 | 1086210000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 41 | 1086160000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 45 | 1086220000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 51 | 1086170000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 55 | 1086230000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 61 | 1086180000 | G.10 |
| BHZ 5.00/04/90LH BK/BK PRT 65 | 1086240000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 11 | 1086370000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 15 | 1086430000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 21 | 1086380000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 25 | 1086440000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 31 | 1086390000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 35 | 1086450000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 41 | 1086400000 | G.10 |
| BHZ 5.00/04/90LH BK/BL PRT 45 | 1086460000 | G.10 |

| Type | Order No. | Page |
|--------------------------------|------------|------|
| C | | |
| CBX200 USB | 8978580000 | G.4 |
| CH20M BUS 4.50/05 AU/250 | 1248220000 | C.27 |
| CH20M BUS 4.50/05 AU/250 | 1248220000 | D.15 |
| CH20M BUS 4.50/05 AU/250 | 1248220000 | G.7 |
| CH20M BUS 4.50/05 AU/500 | 1248230000 | C.27 |
| CH20M BUS 4.50/05 AU/500 | 1248230000 | D.15 |
| CH20M BUS 4.50/05 AU/750 | 1248240000 | C.27 |
| CH20M BUS 4.50/05 AU/750 | 1248240000 | D.15 |
| CH20M BUS-ADP TS 35/250 | 1248250000 | C.27 |
| CH20M BUS-ADP TS 35/250 | 1248250000 | D.15 |
| CH20M BUS-ADP TS 35/250 | 1248250000 | G.7 |
| CH20M BUS-ADP TS 35/500 | 1248260000 | C.27 |
| CH20M BUS-ADP TS 35/500 | 1248260000 | D.15 |
| CH20M BUS-ADP TS 35/500 | 1248260000 | G.7 |
| CH20M BUS-AP LI TS 35X7.5 & 15 | 1193160000 | C.27 |
| CH20M BUS-AP LI TS 35X7.5 & 15 | 1193160000 | D.15 |
| CH20M BUS-AP LI TS 35X7.5 & 15 | 1193160000 | G.7 |
| CH20M BUS-AP RE TS 35X7.5 & 15 | 1193170000 | C.27 |
| CH20M BUS-AP RE TS 35X7.5 & 15 | 1193170000 | D.15 |
| CH20M BUS-AP RE TS 35X7.5 & 15 | 1193170000 | G.7 |
| CH20M BUS-PROFIL TS 35X15/250 | 1248180000 | C.27 |
| CH20M BUS-PROFIL TS 35X15/250 | 1248180000 | D.15 |
| CH20M BUS-PROFIL TS 35X15/250 | 1248180000 | G.7 |
| CH20M BUS-PROFIL TS 35X15/500 | 1248190000 | C.27 |
| CH20M BUS-PROFIL TS 35X15/500 | 1248190000 | D.15 |
| CH20M BUS-PROFIL TS 35X15/500 | 1248190000 | G.7 |
| CH20M BUS-PROFIL TS 35X15/750 | 1248200000 | C.27 |
| CH20M BUS-PROFIL TS 35X15/750 | 1248200000 | D.15 |
| CH20M BUS-PROFIL TS 35X7.5/250 | 1248150000 | C.27 |
| CH20M BUS-PROFIL TS 35X7.5/250 | 1248150000 | D.15 |
| CH20M BUS-PROFIL TS 35X7.5/250 | 1248150000 | G.7 |
| CH20M BUS-PROFIL TS 35X7.5/500 | 1248160000 | C.27 |
| CH20M BUS-PROFIL TS 35X7.5/500 | 1248160000 | D.15 |
| CH20M BUS-PROFIL TS 35X7.5/500 | 1248160000 | G.7 |
| CH20M BUS-PROFIL TS 35X7.5/750 | 1248170000 | C.27 |
| CH20M BUS-PROFIL TS 35X7.5/750 | 1248170000 | D.15 |
| CH20M BUS-PROFIL TS 35X7.5/750 | 1248170000 | G.7 |

D

| | | |
|----------------------|------------|------|
| DI350 0-10V/0-100.0 | 7940011570 | F.19 |
| DI350 4-20mA/0-100.0 | 7940010185 | F.19 |

E

| | | |
|------------------------|------------|------|
| ESG 6.6/20 BHZ 5.00/04 | 1082540000 | G.10 |
| ESG 6/13.5/43.3 SAI AU | 1912130000 | G.10 |
| ESG 8/13.5/43.3 SAI AU | 1912130000 | G.11 |

L

| | | |
|-----------------------|------------|------|
| LPD350 4-20mA/0-100.0 | 7940010163 | F.21 |
| LPD450F 4-20mA | 7940010236 | F.23 |

M

| | | |
|------------------------------|------------|------|
| MCZ CCC 0-20mA/0-20mA | 8411190000 | C.30 |
| MCZ CCC 0-20mA/0-20mA | 8411190000 | C.32 |
| MCZ CFC 0-20MA | 8461480000 | C.30 |
| MCZ CFC 0-20MA | 8461480000 | C.34 |
| MCZ PT100/3 CLP 0...100C | 8425720000 | C.30 |
| MCZ PT100/3 CLP 0...100C | 8425720000 | C.33 |
| MCZ PT100/3 CLP 0...120C | 8483680000 | C.30 |
| MCZ PT100/3 CLP 0...120C | 8483680000 | C.33 |
| MCZ PT100/3 CLP 0...150C | 8604420000 | C.30 |
| MCZ PT100/3 CLP 0...150C | 8604420000 | C.33 |
| MCZ PT100/3 CLP 0...200C | 8473010000 | C.30 |
| MCZ PT100/3 CLP 0...200C | 8473010000 | C.33 |
| MCZ PT100/3 CLP 0...300C | 8473020000 | C.30 |
| MCZ PT100/3 CLP 0...300C | 8473020000 | C.33 |
| MCZ PT100/3 CLP -40C...100C | 8604430000 | C.30 |
| MCZ PT100/3 CLP -40C...100C | 8604430000 | C.33 |
| MCZ PT100/3 CLP -50C...+150C | 8473000000 | C.30 |
| MCZ PT100/3 CLP -50C...+150C | 8473000000 | C.33 |
| MCZ SC 0-10V | 8260280000 | C.30 |
| MCZ SC 0-10V | 8260280000 | C.35 |
| MCZ SC 0-20MA | 8227350000 | C.30 |

| Type | Order No. | Page |
|-------------------------------|------------|------|
| P | | |
| MCZ SC 0-20MA | 8227350000 | C.35 |
| MCZ VFC 0-10V | 8461470000 | C.30 |
| MCZ VFC 0-10V | 8461470000 | C.34 |
| MF 5/7.5 MC NE WS | 1877680000 | G.11 |
| P | | |
| P275 | 7940010202 | G.17 |
| PAS CMR 0.5...2.5 A DC | 8742610000 | E.6 |
| PAS CMR 2.0...5.0 A DC | 8742620000 | E.6 |
| PAS CMR 4.5...10 A DC | 8742630000 | E.7 |
| PMX400HZX | 7940015595 | F.15 |
| PMX400HZX RO/AO | 7940011979 | F.15 |
| PMX400TMP | 7940017862 | F.14 |
| PMX420 | 7940018956 | F.11 |
| PMX420Plus | 7940018957 | F.10 |
| PORTACAL 1000EU | 1439640000 | G.15 |
| PTX800A 4-20mA | 7940010243 | F.7 |
| PTX800A 4-20mA/RO/AO | 7940014374 | F.7 |
| PTX800D | 7940011133 | F.6 |
| PTX800D RO/AO | 7940012323 | F.6 |
| S | | |
| SET CH20M BUS 250MM TS 35X15 | 1335150000 | C.27 |
| SET CH20M BUS 250MM TS 35X15 | 1335150000 | D.15 |
| SET CH20M BUS 250MM TS 35X15 | 1335150000 | G.7 |
| SET CH20M BUS 250MM TS 35X7.5 | 1335140000 | C.27 |
| SET CH20M BUS 250MM TS 35X7.5 | 1335140000 | D.15 |
| SET CH20M BUS 250MM TS 35X7.5 | 1335140000 | G.7 |
| T | | |
| TS 35X15/LL 1M/ST/ZN | 0236510000 | C.27 |
| TS 35X15/LL 1M/ST/ZN | 0236510000 | D.15 |
| TS 35X15/LL 1M/ST/ZN | 0236510000 | G.7 |
| TS 35X7.5/LL 1M/ST/ZN | 0514510000 | C.27 |
| TS 35X7.5/LL 1M/ST/ZN | 0514510000 | D.15 |
| TS 35X7.5/LL 1M/ST/ZN | 0514510000 | G.7 |
| W | | |
| WAS1 CMA 1/5/10A ac | 8523400000 | D.72 |
| WAS1 CMA LP 1/5/10A ac | 8528650000 | D.72 |
| WAS1 CMA LP 1/5/10A EX | 8975590000 | D.73 |
| WAS2 CMR 1/5/10A ac | 8516560000 | E.5 |
| WAS2 VMA V ac | 8581220000 | D.74 |
| WAS2 VMR 3ph | 8705630000 | E.9 |
| WAS4 CCC DC 4-20/0-20MA | 8445010000 | D.54 |
| WAS4 CCC DC 4-20/4-20MA | 8444980000 | D.54 |
| WAS4 CVC DC 4-20/0-10V | 8445040000 | D.55 |
| WAS4 PRO Freq | 8581180000 | D.71 |
| WAS5 CCC 0-20/4-20mA | 8540250000 | D.48 |
| WAS5 CCC 0-20/0-20mA | 8540180000 | D.48 |
| WAS5 CCC 20LP | 8581160000 | D.56 |
| WAS5 CCC 20LP EX | 8975640000 | D.57 |
| WAS5 CCC 4-20/0-20MA | 8540200000 | D.50 |
| WAS5 CCC HF 0-20/0-20MA | 8447160000 | D.44 |
| WAS5 CCC HF 4-20/0-20MA | 8447250000 | D.45 |
| WAS5 CCC LP 0-20/0-20mA | 8444950000 | D.59 |
| WAS5 CCC LP 0-20/0-20mA | 8463580000 | D.59 |
| WAS5 CVC 0-20mA/0-10V | 8540270000 | D.49 |
| WAS5 CVC 4-20mA/0-10V | 8540230000 | D.50 |
| WAS5 CVC HF 0-20/0-10V | 8447220000 | D.44 |
| WAS5 CVC HF 4-20/0-10V | 8447280000 | D.45 |
| WAS5 DC/Alarm | 8543820000 | E.4 |
| WAS5 OLP | 8543720000 | D.58 |
| WAS5 PRO RTD | 8560700000 | D.60 |
| WAS5 PRO RTD 1000 | 8679490000 | D.62 |
| WAS5 PRO RTD Cu | 8638950000 | D.64 |
| WAS5 PRO Thermo | 8560720000 | D.68 |
| WAS5 VCC 0-10V/0-20MA | 8540310000 | D.51 |
| WAS5 VCC 0 | | |

| Type | Order No. | Page |
|-------------------------|------------|------|
| WAZ5 VVC 0-10V/0-10V | 8540340000 | D.52 |
| WAZ5 VVC HF 0-10/0-10V | 8447380000 | D.47 |
| WAZ6 TTA | 8939680000 | D.42 |
| WAZ6 TTA EX | 8964320000 | D.43 |
| WDS2 RS232/RS485/422 | 8615700000 | D.77 |
| WDS2 RS232/TTY | 8615690000 | D.78 |
| WS 10/5 MC NE WS | 1635000000 | G.12 |
| WS 10/6 MC NE WS | 1828450000 | G.12 |
| WS 10/6 MC NE WS | 1828450000 | G.12 |
| WS 15/5 MC NE WS | 1609880000 | G.12 |
| WTS4 THERMO | 8432300000 | D.69 |
| WTZ4 PT100/2 C 0/4-20mA | 8432220000 | D.67 |
| WTZ4 PT100/2 V 0-10V | 8432190000 | D.67 |
| WTZ4 PT100/3 C 0/4-20mA | 8432160000 | D.66 |
| WTZ4 PT100/3 V 0-10V | 8432130000 | D.66 |
| WTZ4 PT100/4 C 0/4-20mA | 8432280000 | D.65 |
| WTZ4 PT100/4 V 0-10V | 8432250000 | D.65 |
| WTZ4 THERMO | 8432310000 | D.69 |

Z

| | | |
|---------------|------------|------|
| ZQV 2.5N/2 BL | 1717990000 | G.12 |
| ZQV 2.5N/2 GE | 1693800000 | G.12 |
| ZQV 2.5N/2 RT | 1717900000 | G.12 |
| ZQV 2.5N/2 SW | 1718080000 | G.12 |
| ZQV 4N/10 GE | 1758260000 | G.12 |
| ZQV 4N/2 GE | 1758250000 | G.12 |
| ZQV 4N/3 GE | 1762630000 | G.12 |
| ZQV 4N/4 GE | 1762620000 | G.12 |

| Order No. | Type | Page |
|------------------|-------------------------------------|------|
| 106000000 | | |
| 1067250000 | ACT20P-BRIDGE-S | D.18 |
| 1067250000 | ACT20P-BRIDGE-S | D.37 |
| 108000000 | | |
| 1082540000 | ESG 6.6/20 BHZ 5.00/04 | G.10 |
| 1086040000 | BHZ 5.00/02/90LH BK/BK PRT 41 | G.10 |
| 1086130000 | BHZ 5.00/04/90LH BK/BK PRT 11 | G.10 |
| 1086140000 | BHZ 5.00/04/90LH BK/BK PRT 21 | G.10 |
| 1086150000 | BHZ 5.00/04/90LH BK/BK PRT 31 | G.10 |
| 1086160000 | BHZ 5.00/04/90LH BK/BK PRT 41 | G.10 |
| 1086170000 | BHZ 5.00/04/90LH BK/BK PRT 51 | G.10 |
| 1086180000 | BHZ 5.00/04/90LH BK/BK PRT 61 | G.10 |
| 1086190000 | BHZ 5.00/04/90LH BK/BK PRT 15 | G.10 |
| 1086200000 | BHZ 5.00/04/90LH BK/BK PRT 25 | G.10 |
| 1086210000 | BHZ 5.00/04/90LH BK/BK PRT 35 | G.10 |
| 1086220000 | BHZ 5.00/04/90LH BK/BK PRT 45 | G.10 |
| 1086230000 | BHZ 5.00/04/90LH BK/BK PRT 55 | G.10 |
| 1086240000 | BHZ 5.00/04/90LH BK/BK PRT 65 | G.10 |
| 1086250000 | BHZ 5.00/02/90LH BK/BL PRT 11 | G.10 |
| 1086260000 | BHZ 5.00/02/90LH BK/BL PRT 21 | G.10 |
| 1086370000 | BHZ 5.00/04/90LH BK/BL PRT 11 | G.10 |
| 1086380000 | BHZ 5.00/04/90LH BK/BL PRT 21 | G.10 |
| 1086390000 | BHZ 5.00/04/90LH BK/BL PRT 31 | G.10 |
| 1086400000 | BHZ 5.00/04/90LH BK/BL PRT 41 | G.10 |
| 1086410000 | BHZ 5.00/04/90LH BK/BL PRT 51 | G.10 |
| 1086420000 | BHZ 5.00/04/90LH BK/BL PRT 61 | G.10 |
| 1086430000 | BHZ 5.00/04/90LH BK/BL PRT 15 | G.10 |
| 1086440000 | BHZ 5.00/04/90LH BK/BL PRT 25 | G.10 |
| 1086450000 | BHZ 5.00/04/90LH BK/BL PRT 35 | G.10 |
| 1086460000 | BHZ 5.00/04/90LH BK/BL PRT 45 | G.10 |
| 1086470000 | BHZ 5.00/04/90LH BK/BL PRT 55 | G.10 |
| 1086480000 | BHZ 5.00/04/90LH BK/BL PRT 65 | G.10 |
| 116000000 | | |
| 1160640000 | ACT20X-CJCHTS PRT 11 | G.10 |
| 1160650000 | ACT20X-CJCHTS PRT 21 | G.10 |
| 117000000 | | |
| 1175980000 | ACT20M-CI-CO-S | C.13 |
| 1175990000 | ACT20M-CI-ZCO-S | C.10 |
| 1176000000 | ACT20M-AI-AO-S | C.14 |
| 1176010000 | ACT20M-AI-AO-E-S | C.15 |
| 1176020000 | ACT20M-AI-2AO-S | C.11 |
| 1176030000 | ACT20M-AI-AO-S | C.17 |
| 1176040000 | ACT20M-CI-CO-OLP-S | C.19 |
| 1176050000 | ACT20M-2CI-2CO-OLP-S | C.19 |
| 1176070000 | ACT20M-CI-CO-ILP-S | C.18 |
| 1176080000 | ACT20M-2CI-2CO-ILP-S | C.18 |
| 119000000 | | |
| 1193160000 | CH20M BUS-AP LI TS 35X7.5 & amp; 15 | C.27 |
| 1193160000 | CH20M BUS-AP LI TS 35X7.5 & amp; 15 | D.15 |
| 1193160000 | CH20M BUS-AP LI TS 35X7.5 & amp; 15 | G.7 |
| 1193170000 | CH20M BUS-AP RE TS 35X7.5 & 15 | C.27 |
| 1193170000 | CH20M BUS-AP RE TS 35X7.5 & 15 | D.15 |
| 1193170000 | CH20M BUS-AP RE TS 35X7.5 & 15 | G.7 |
| 124000000 | | |
| 1248150000 | CH20M BUS-PROFIL TS 35X7.5/250 | C.27 |
| 1248150000 | CH20M BUS-PROFIL TS 35X7.5/250 | D.15 |
| 1248150000 | CH20M BUS-PROFIL TS 35X7.5/250 | G.7 |
| 1248160000 | CH20M BUS-PROFIL TS 35X7.5/500 | C.27 |
| 1248160000 | CH20M BUS-PROFIL TS 35X7.5/500 | D.15 |
| 1248160000 | CH20M BUS-PROFIL TS 35X7.5/500 | G.7 |
| 1248170000 | CH20M BUS-PROFIL TS 35X7.5/750 | C.27 |
| 1248170000 | CH20M BUS-PROFIL TS 35X7.5/750 | D.15 |
| 1248170000 | CH20M BUS-PROFIL TS 35X7.5/750 | G.7 |
| 1248180000 | CH20M BUS-PROFIL TS 35X15/250 | C.27 |
| 1248180000 | CH20M BUS-PROFIL TS 35X15/250 | D.15 |
| 1248180000 | CH20M BUS-PROFIL TS 35X15/250 | G.7 |
| 1248190000 | CH20M BUS-PROFIL TS 35X15/500 | C.27 |
| 1248190000 | CH20M BUS-PROFIL TS 35X15/500 | D.15 |
| 1248190000 | CH20M BUS-PROFIL TS 35X15/500 | G.7 |
| 1248210000 | CH20M BUS-PROFIL TS 35X15/750 | C.27 |
| 1248210000 | CH20M BUS-PROFIL TS 35X15/750 | D.15 |
| 1248210000 | CH20M BUS-PROFIL TS 35X15/750 | G.7 |
| 1248220000 | CH20M BUS 4.50/05 AU/250 | C.27 |
| 1248220000 | CH20M BUS 4.50/05 AU/250 | D.15 |
| 1248220000 | CH20M BUS 4.50/05 AU/250 | G.7 |
| 1248230000 | CH20M BUS 4.50/05 AU/500 | C.27 |
| 1248230000 | CH20M BUS 4.50/05 AU/500 | D.15 |
| 1248230000 | CH20M BUS 4.50/05 AU/500 | G.7 |
| 1248240000 | CH20M BUS 4.50/05 AU/750 | C.27 |
| 1248240000 | CH20M BUS 4.50/05 AU/750 | D.15 |
| 1248240000 | CH20M BUS 4.50/05 AU/750 | G.7 |
| 1248250000 | CH20M BUS-ADP TS 35/250 | C.27 |
| 1248250000 | CH20M BUS-ADP TS 35/250 | D.15 |
| 1248250000 | CH20M BUS-ADP TS 35/250 | G.7 |
| 1248260000 | CH20M BUS-ADP TS 35/500 | C.27 |
| 1248260000 | CH20M BUS-ADP TS 35/500 | D.15 |
| 1248260000 | CH20M BUS-ADP TS 35/500 | G.7 |
| 1248270000 | CH20M BUS-ADP TS 35/750 | C.27 |

| Order No. | Type | Page |
|------------------|-------------------------------|------|
| 1248270000 | CH20M BUS-ADP TS 35/750 | D.15 |
| 1248270000 | CH20M BUS-ADP TS 35/750 | G.7 |
| 128000000 | | |
| 1282490000 | ACT20-FEED-IN-BASIC-S | C.29 |
| 1282490000 | ACT20-FEED-IN-BASIC-S | G.9 |
| 131000000 | | |
| 1318220000 | ACT20X-HUI-SAQ-IP-S | B.15 |
| 133000000 | | |
| 1334490000 | ACT20C-AI-AO-MTCP | D.7 |
| 1335140000 | SET CH20M BUS 250MM TS 35X7.5 | C.27 |
| 1335140000 | SET CH20M BUS 250MM TS 35X7.5 | D.15 |
| 1335140000 | SET CH20M BUS 250MM TS 35X7.5 | G.7 |
| 1335150000 | SET CH20M BUS 250MM TS 35X15 | C.27 |
| 1335150000 | SET CH20M BUS 250MM TS 35X15 | D.15 |
| 1335150000 | SET CH20M BUS 250MM TS 35X15 | G.7 |
| 137000000 | | |
| 1375450000 | ACT20M-BAI-AO-S | C.16 |
| 1375470000 | ACT20M-BAI-2AO-S | C.12 |
| 1375480000 | ACT20M-TCI-AO-S | C.24 |
| 1375500000 | ACT20M-TCI-AO-E-S | C.25 |
| 1375510000 | ACT20M-RTI-AO-S | C.22 |
| 1375520000 | ACT20M-RTI-AO-E-S | C.23 |
| 143000000 | | |
| 1435590000 | ACT20M-RTCH-CO-OLP-S | C.20 |
| 1435610000 | ACT20M-RTI-CO-EOLP-S | C.21 |
| 1439640000 | PORTACAL 1000EU | G.15 |
| 145000000 | | |
| 1453210000 | ACT20P-UI-AO-DO-IP-S | D.18 |
| 1453210000 | ACT20P-UI-AO-DO-IP-S | D.23 |
| 147000000 | | |
| 1477420000 | ACT20P-AI-AO-DC-S | D.18 |
| 1477420000 | ACT20P-AI-AO-DC-S | D.25 |
| 148000000 | | |
| 1481970000 | ACT20P-PRO DCDC II-S | D.18 |
| 1481970000 | ACT20P-PRO DCDC II-S | D.21 |
| 151000000 | | |
| 1510240000 | ACT20C-CMT-10-AD-RC-S | D.12 |
| 1510340000 | ACT20C-LBT-10 | D.13 |
| 1510370000 | ACT20C-GTW-100-MTCP-S | D.11 |
| 1510390000 | ACT20P-CMT-60-RC-S | D.33 |
| 1510420000 | ACT20C-CMT-60-AD-RC-S | D.12 |
| 1510440000 | ACT20P-CMT-60-AD-RC-S | D.18 |
| 1510440000 | ACT20P-CMT-60-AD-RC-S | D.33 |
| 1510470000 | ACT20P-CMT-10-AD-RC-S | D.18 |
| 1510470000 | ACT20P-CMT-10-AD-RC-S | D.33 |
| 1510540000 | ACT20P-CMT-30-AD-RC-S | D.18 |
| 1510540000 | ACT20P-CMT-30-AD-RC-S | D.33 |
| 152000000 | | |
| 1526460000 | BLZ 5.08/02/180 SN OR BX | G.13 |
| 160000000 | | |
| 1609880000 | WS 15/5 MC NE WS | G.12 |
| 1635000000 | WS 10/5 MC NE WS | G.12 |
| 1693800000 | ZQV 2.5N/2 GE | G.12 |
| 171000000 | | |
| 1717900000 | ZQV 2.5N/2 RT | G.12 |
| 1717990000 | ZQV 2.5N/2 BL | G.12 |
| 1718080000 | ZQV 2.5N/2 SW | G.12 |
| 175000000 | | |
| 1758250000 | ZQV 4N/2 GE | G.12 |
| 1758260000 | ZQV 4N/10 GE | G.12 |
| 176000000 | | |
| 1762620000 | ZQV 4N/4 GE | G.12 |
| 1762630000 | ZQV 4N/3 GE | G.12 |
| 182000000 | | |
| 1828450000 | WS 10/6 MC NE WS | G.12 |
| 1828450000 | WS 10/6 MC NE WS | G.12 |

| Order No. | Type | Page |
|------------------|---------------------------|------|
| 187000000 | | |
| 1877680000 | MF 5/7.5 MC NE WS | G.11 |
| 191000000 | | |
| 1912130000 | ESG 8/13.5/43.3 SAI AU | G.10 |
| 1912130000 | ESG 8/13.5/43.3 SAI AU | G.11 |
| 224000000 | | |
| 2242030000 | BLZ 5.08/03/180 SN OR PRT | G.13 |
| 2242050000 | BLZ 5.08/03/180 SN OR PRT | G.13 |
| 2242060000 | BLZ 5.08/03/180 SN OR PRT | G.13 |
| 2242070000 | BLZ 5.08/03/180 SN OR PRT | G.13 |
| 2246070000 | BLZ 5.08/02/180 SN OR PRT | G.13 |
| 2246080000 | BLZ 5.08/02/180 SN OR PRT | G.13 |
| 2246090000 | BLZ 5.08/02/180 SN OR PRT | G.13 |
| 2246100000 | BLZ 5.08/02/180 SN OR PRT | G.13 |
| 776000000 | | |
| 7760054114 | ACT20P-CI-CO | D.18 |
| 7760054114 | ACT20P-CI-CO | D.27 |
| 7760054115 | ACT20P-CI-2CO | D.18 |
| 7760054115 | ACT20P-CI-2CO | D.26 |
| 7760054117 | ACT20P-2CI-2CO-12 | D.18 |
| 7760054117 | ACT20P-2CI-2CO-12 | D.28 |
| 794000000 | | |
| 7940010163 | LPD350 4-20mA/I-0/100.0 | F.21 |
| 7940010185 | D1350 4-20mA/I-0/100.0 | F.19 |
| 7940010202 | P275 | G.17 |
| 7940010236 | LPD450F 4-20mA | F.23 |
| 7940010243 | PTX800A 4-20mA | F.7 |
| 7940011133 | PTX800D | F.6 |
| 7940011570 | D1350 0-10V/0-100.0 | F.19 |
| 7940011895 | AMS400A 4-20mA/AO | F.17 |
| 7940011979 | PMX400HZX RO/AO | F.15 |
| 7940012323 | PTX800D RO/AO | F.6 |
| 7940014374 | PTX800A 4-20mA/R0/AO | F.7 |
| 7940015595 | PMX400HZX | F.15 |
| 7940017862 | PMX400TMP | F.14 |
| 7940018956 | PMX420 | F.11 |
| 7940018957 | PMX420Plus | F.10 |
| 7940045760 | ACT20P-UI-2RCO-DC-S | D.18 |
| 7940045760 | ACT20P-UI-2RCO-DC-S | D.31 |
| 822000000 | | |
| 8227350000 | MCZ SC 0-20MA | C.30 |
| 8227350000 | MCZ SC 0-20MA | C.35 |
| 826000000 | | |
| 8260280000 | MCZ SC 0-10V | C.30 |
| 8260280000 | MCZ SC 0-10V | C.35 |
| 838000000 | | |
| 8389030000 | AP MCZ1.5 | G.12 |
| 841000000 | | |
| 8411190000 | MCZ CCC 0-20mA/0-20mA | C.30 |
| 8411190000 | MCZ CCC 0-20mA/0-20mA | C.32 |
| 842000000 | | |
| 8425720000 | MCZ PT100/3 CLP 0...100C | C.30 |
| 8425720000 | MCZ PT100/3 CLP 0...100C | C.33 |
| 843000000 | | |
| 8432130000 | WTZ4 PT100/3 V 0-10V | D.66 |
| 8432160000 | WTZ4 PT100/3 C 0/4-20mA | D.66 |
| 8432190000 | WTZ4 PT100/2 V 0-10V | D.67 |
| 8432220000 | WTZ4 PT100/2 C 0/4-20mA | D.67 |
| 8432250000 | WTZ4 PT100/4 V 0-10V | D.65 |
| 8432280000 | WTZ4 PT100/4 C 0/4-20mA | D.65 |
| 8432300000 | WTS4 THERMO | D.69 |
| 8432310000 | WTZ4 THERMO | D.69 |
| 844000000 | | |
| 8444950000 | WAS5 CCC LP 0-20/0-20mA | D.59 |
| 8444960000 | WAZ5 CCC LP 0-20/0-20mA | D.59 |
| 8444980000 | WAS4 CCC DC 4-20/4-20MA | D.54 |
| 8444990000 | WAZ4 CCC DC 4-20/4-20MA | D.54 |
| 8445010000 | WAS4 CCC DC 4-20/0-20MA | D.54 |
| 8445040000 | WAS4 CVC DC 4-20/0-10V | D.55 |
| 8445050000 | WAZ4 CVC DC 4-20/0-10V | D.55 |
| 8447160000 | WAS5 CCC HF 0-20/0-20MA | D.44 |
| 8447170000 | WAZ5 CCC HF 0-20/0-20MA | D.44 |
| 8447220000 | WAS5 CVC HF 0-20/0-10V | D.44 |
| 8447250000 | WAZ5 CVC HF 4-20/0-20MA | D.45 |
| 8447280000 | WAS5 CVC HF 4-20/0-10V | D.45 |
| 8447310000 | WAS5 VCC HF 0-10/0-20MA | D.46 |

| Order No. | Type | Page |
|------------|-------------------------|------|
| 8447340000 | WAS5 VCC HF 0-10/4-20mA | D.46 |
| 8447370000 | WAS5 VVC HF 0-10/0-10V | D.47 |
| 8447380000 | WAZ5 VVC HF 0-10/0-10V | D.47 |

8460000000

| | | |
|------------|-------------------------|------|
| 8461470000 | MCZ VFC 0-10V | C.30 |
| 8461470000 | MCZ VFC 0-10V | C.34 |
| 8461480000 | MCZ CFC 0-20MA | C.30 |
| 8461480000 | MCZ CFC 0-20MA | C.34 |
| 8463580000 | WAS5 CCC LP 0-20/0-20mA | D.59 |
| 8463590000 | WAZ5 CCC LP 0-20/0-20mA | D.59 |

8470000000

| | | |
|------------|------------------------------|------|
| 8473000000 | MCZ PT100/3 CLP -50C...+150C | C.30 |
| 8473000000 | MCZ PT100/3 CLP -50C...+150C | C.33 |
| 8473010000 | MCZ PT100/3 CLP 0...200C | C.30 |
| 8473010000 | MCZ PT100/3 CLP 0...200C | C.33 |
| 8473020000 | MCZ PT100/3 CLP 0...300C | C.30 |
| 8473020000 | MCZ PT100/3 CLP 0...300C | C.33 |

8480000000

| | | |
|------------|--------------------------|------|
| 8483680000 | MCZ PT100/3 CLP 0...120C | C.30 |
| 8483680000 | MCZ PT100/3 CLP 0...120C | C.33 |

8510000000

| | | |
|------------|---------------------|-----|
| 8516560000 | WAS2 CMR 1/5/10A ac | E.6 |
| 8516570000 | WAZ2 CMR 1/5/10A ac | E.6 |

8520000000

| | | |
|------------|------------------------|------|
| 8523400000 | WAS1 CMA 1/5/10A ac | D.72 |
| 8523410000 | WAZ1 CMA 1/5/10A ac | D.72 |
| 8528650000 | WAS1 CMA LP 1/5/10A ac | D.72 |
| 8528660000 | WAZ1 CMA LP 1/5/10A ac | D.72 |

8540000000

| | | |
|------------|-----------------------|------|
| 8540180000 | WAS5 CCC 0-20/0-20mA | D.48 |
| 8540190000 | WAZ5 CCC 0-20/0-20mA | D.48 |
| 8540200000 | WAS5 CCC 4-20/0-20MA | D.50 |
| 8540230000 | WAS5 CVC 4-20mA/0-10V | D.50 |
| 8540250000 | WAS5 CCC 0-20/4-20mA | D.48 |
| 8540270000 | WAS5 CVC 0-20mA/0-10V | D.49 |
| 8540290000 | WAS5 VCC 0-10V/4-20MA | D.51 |
| 8540300000 | WAZ5 VCC 0-10V/4-20MA | D.51 |
| 8540310000 | WAS5 VCC 0-10V/0-20MA | D.51 |
| 8540320000 | WAZ5 VCC 0-10V/0-20MA | D.51 |
| 8540330000 | WAS5 VVC 0-10V/0-10V | D.52 |
| 8540340000 | WAZ5 VVC 0-10V/0-10V | D.52 |
| 8543720000 | WAS5 OLP | D.58 |
| 8543730000 | WAZ5 OLP | D.58 |
| 8543820000 | WAS5 DC/Alarm | E.4 |
| 8543880000 | WAZ5 DC/Alarm | E.4 |

8560000000

| | | |
|------------|-------------------------|------|
| 8560700000 | WAS5 PRO RTD | D.60 |
| 8560710000 | WAZ5 PRO RTD | D.60 |
| 8560720000 | WAS5 PRO Thermo | D.68 |
| 8560730000 | WAZ5 PRO Thermo | D.68 |
| 8561610000 | WAS5 VVC HF +/-10V/+10V | D.47 |

8580000000

| | | |
|------------|---------------|------|
| 8581160000 | WAS5 CCC 20LP | D.56 |
| 8581170000 | WAZ5 CCC 20LP | D.56 |
| 8581180000 | WAS4 PRO Freq | D.71 |
| 8581190000 | WAZ4 PRO Freq | D.71 |
| 8581220000 | WAS2 VMA V ac | D.74 |
| 8581230000 | WAZ2 VMA V ac | D.74 |

8600000000

| | | |
|------------|-----------------------------|------|
| 8604420000 | MCZ PT100/3 CLP 0...150C | C.30 |
| 8604420000 | MCZ PT100/3 CLP 0...150C | C.33 |
| 8604430000 | MCZ PT100/3 CLP -40C...100C | C.30 |
| 8604430000 | MCZ PT100/3 CLP -40C...100C | C.33 |

8610000000

| | | |
|------------|----------------------|------|
| 8615690000 | WDS2 RS232/TTY | D.78 |
| 8615700000 | WDS2 RS232/RS485/422 | D.77 |

8630000000

| | | |
|------------|-----------------|------|
| 8638950000 | WAS5 PRO RTD Cu | D.64 |
|------------|-----------------|------|

8670000000

| | | |
|------------|-------------------|------|
| 8679490000 | WAS5 PRO RTD 1000 | D.62 |
|------------|-------------------|------|

8700000000

| | | |
|------------|--------------|-----|
| 8705630000 | WAS2 VMR 3ph | E.9 |
| 8705640000 | WAS5 VMR 1ph | E.8 |

| Order No. | Type | Page |
|-------------------|------------------------|------|
| 8740000000 | | |
| 8742610000 | PAS CMR 0,5...2,5 A DC | E.6 |
| 8742620000 | PAS CMR 2,0...5,0 A DC | E.6 |
| 8742630000 | PAS CMR 4,5...10 A DC | E.7 |

8930000000

| | | |
|------------|----------|------|
| 8939670000 | WAS6 TTA | D.42 |
| 8939680000 | WAZ6 TTA | D.42 |

8960000000

| | | |
|------------|------------------------|------|
| 8964310000 | WAS6 TTA EX | D.43 |
| 8964320000 | WAZ6 TTA EX | D.43 |
| 8965340000 | ACT20X-HDI-SDD-RNO-S | B.17 |
| 8965350000 | ACT20X-HDI-SDD-RNC-S | B.17 |
| 8965360000 | ACT20X-HDI-SDD-S | B.19 |
| 8965370000 | ACT20X-2HDI-2SDD-RNO-S | B.17 |
| 8965380000 | ACT20X-2HDI-2SDD-RNC-S | B.17 |
| 8965390000 | ACT20X-2HDI-2SDD-S | B.19 |
| 8965400000 | ACT20X-SDI-HDD-L-S | B.21 |
| 8965410000 | ACT20X-SDI-HDD-H-S | B.23 |
| 8965420000 | ACT20X-2SDI-2HDD-S | B.21 |
| 8965430000 | ACT20X-HAI-SAO-S | B.7 |
| 8965440000 | ACT20X-2HAI-2SAO-S | B.7 |
| 8965450000 | ACT20X-SAI-HAO-S | B.9 |
| 8965460000 | ACT20X-2SAI-2HAD-S | B.9 |
| 8965470000 | ACT20X-HTI-SAO-S | B.11 |
| 8965480000 | ACT20X-2HTI-2SAO-S | B.11 |
| 8965490000 | ACT20X-HUI-SAO-S | B.13 |
| 8965500000 | ACT20-FEED-IN-PRO-S | C.29 |
| 8965500000 | ACT20-FEED-IN-PRO-S | G.9 |

8970000000

| | | |
|------------|------------------------|------|
| 8975590000 | WAS1 CMA LP 1/5/10A EX | D.73 |
| 8975640000 | WAS5 CCC 20LP EX | D.57 |
| 8978580000 | CBX200 USB | G.4 |

0230000000

| | | |
|------------|----------------------|------|
| 0236510000 | TS 35X15/LL 1M/ST/ZN | C.27 |
| 0236510000 | TS 35X15/LL 1M/ST/ZN | D.15 |
| 0236510000 | TS 35X15/LL 1M/ST/ZN | G.7 |

0510000000

| | | |
|------------|-----------------------|------|
| 0514510000 | TS 35X7.5/LL 1M/ST/ZN | C.27 |
| 0514510000 | TS 35X7.5/LL 1M/ST/ZN | D.15 |
| 0514510000 | TS 35X7.5/LL 1M/ST/ZN | G.7 |

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

X

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

Weidmüller – Your partner in Industrial Connectivity

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
info@weidmueller.com
www.weidmueller.com

Your local Weidmüller partner can
be found on our website:
www.weidmueller.com/countries

Made in Germany



Order number: 2028820000/11/2015/SMDM