



technical data type **FUTURIX VINO**

Futurix with LED tube especially for wine, champagne and beer cellars.

The Light is free of blue „High Visible Energy“ spectrum (400nm - 490nm).

Base: Glass reinforced polyester, compression moulded (GRP).

- *Optional* : - Stainless steel suspension bracket.
- Wieland, Stucchi or Adels connector.

Diffuser: Clear Polycarbonate

Impact strength data of the diffuser:

diffuser in PC > 6 Nm (IK08)

Lamp: Toyoda LED UGS-500-CR

Clips: 1-part stainless steel clips

- *Optional* : 1-part polycarbonate clips or 1-part PA clips.



Specifications:


- Color 2150 K
- Product life min. 60.000h L80 B10 at Ta.max.
- MacAdam 3 SDCM
- 220-240V 50/60 Hz.
- Ta: -20°C/Ta.max.

- *Optional* : - Trough-wiring 1 phase or 3 phase.
(This will influence the Ta.max.)


Housing	Power*	Flux**	Ta.max.
118 (frosted)	13 W	1190 lm	30 °C
136 (frosted)	25 W	2380 lm	30 °C
218 (frosted)	26 W	2380 lm	30 °C

* Total power consumption of LED tube and driver.

Luminous output and electrical load have an initial tolerance of +/- 10 % from nominal.

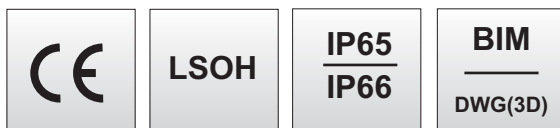

technical data type **FUTURIX VINO**

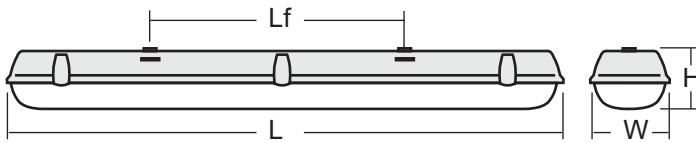

Housing	L	W*	H	Lf	Clips	Kg
118	665	84	98,5	400	6	1,5
136	1275	84	98,5	800	8	1,8
218	665	134	98,5	400	6	2,0

*Dimensions without clips

